
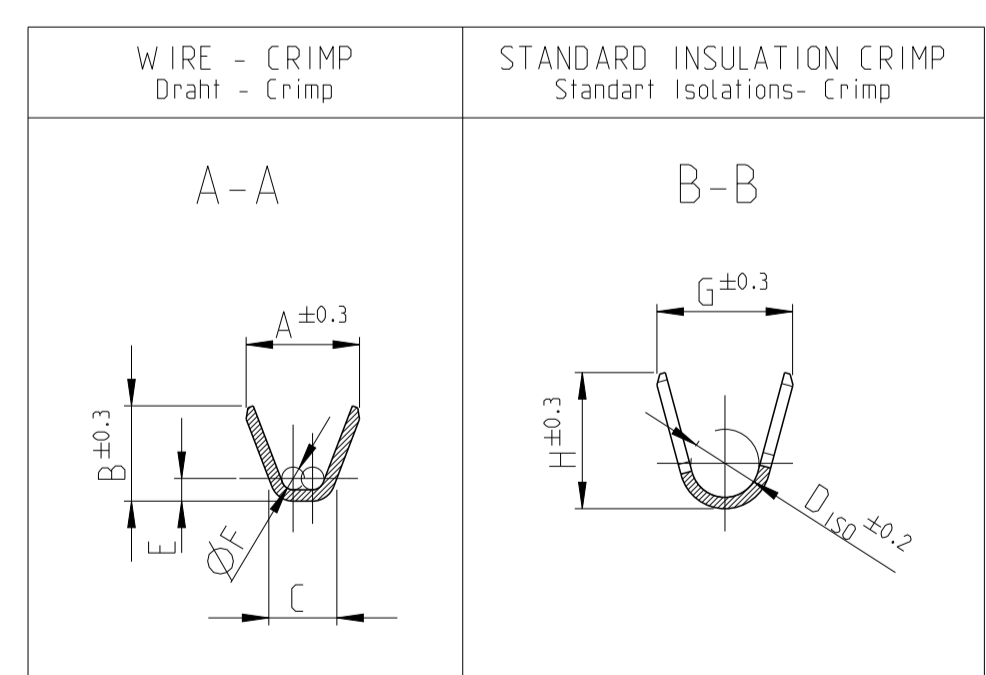
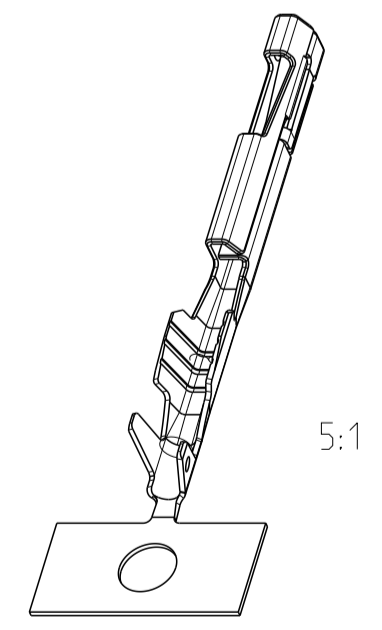
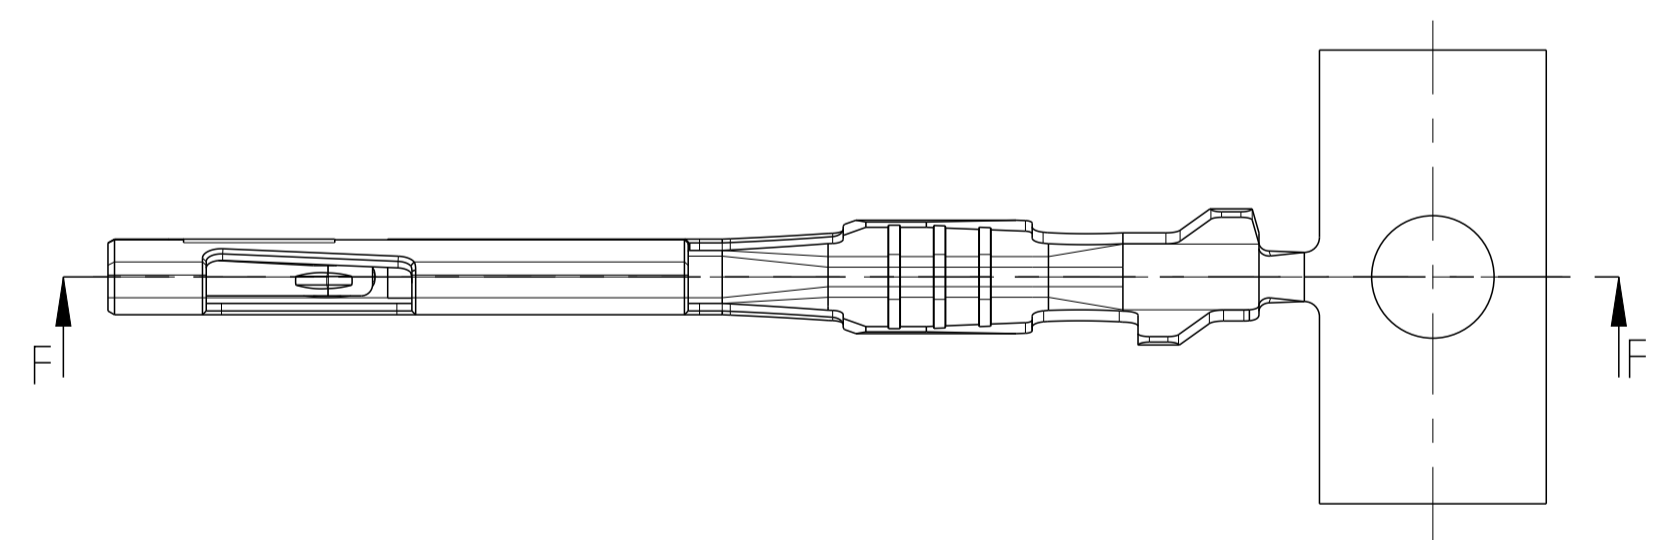
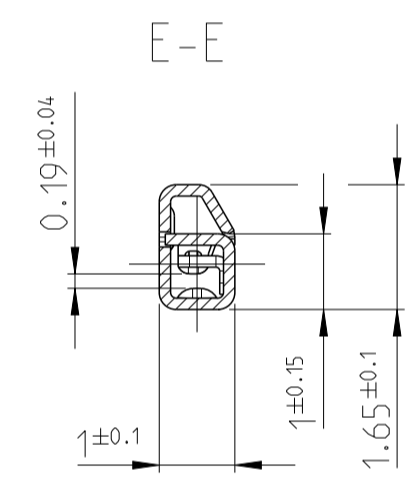
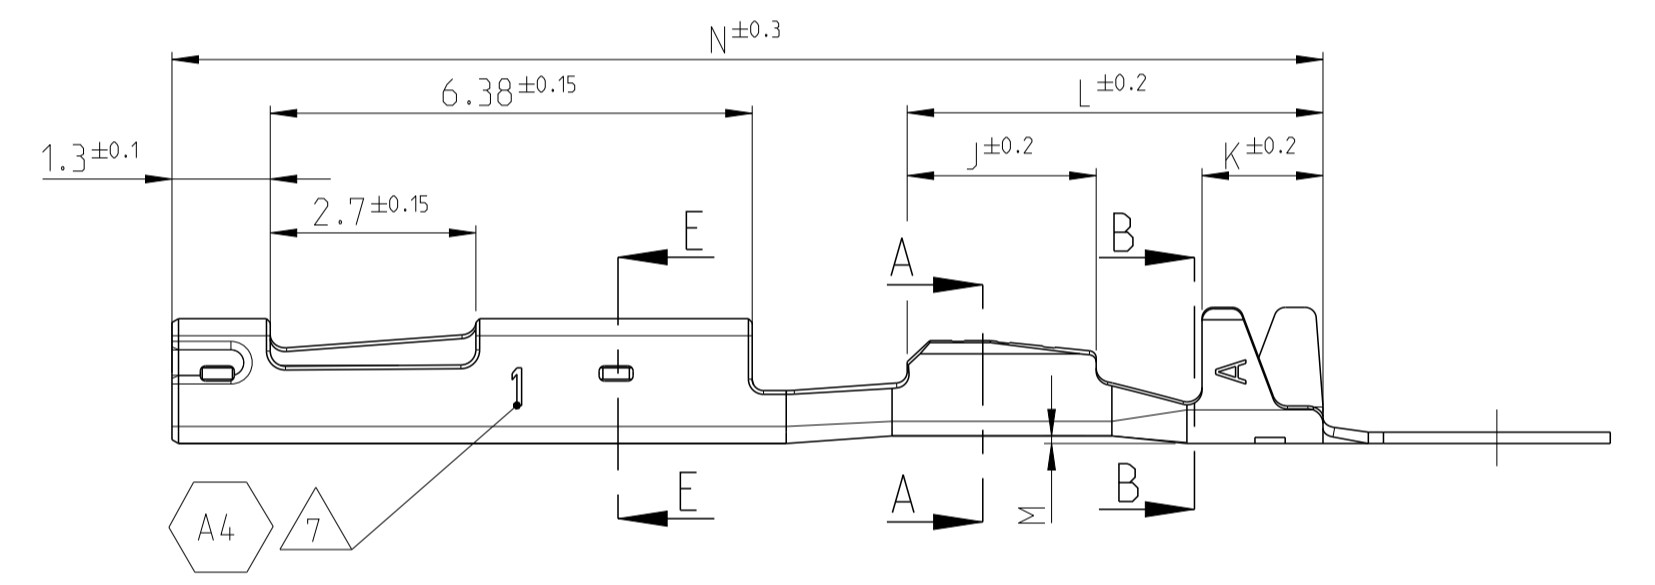
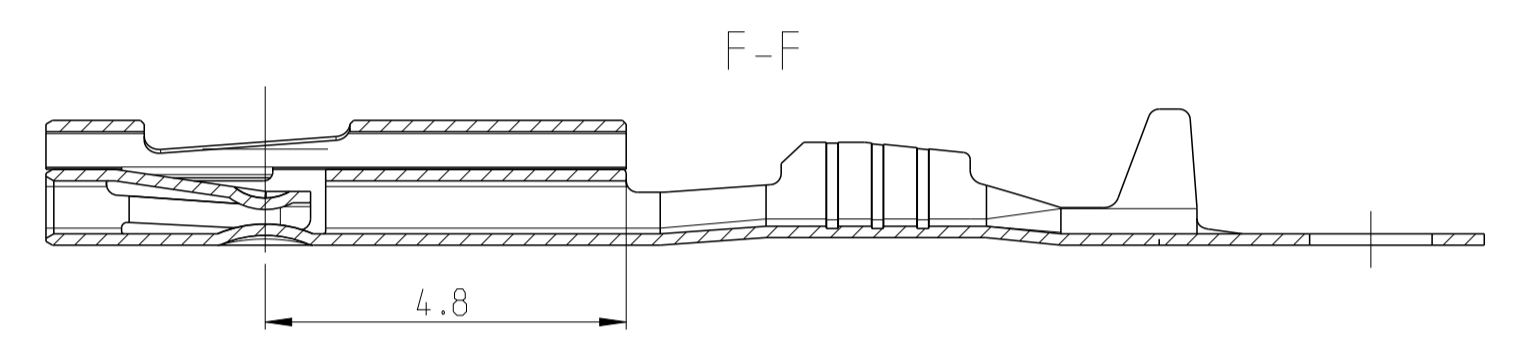


LOC	DIST	REVISONS	DATE	DWN	APVD
A1	-	DESCRIPTION			
		ÄNDERUNGEN			
		BESCHREIBUNG			
PROJECT NR.:	A3	TABLE : MARKING CORRECTED (2ST WAS 1ST)	24MAR2016	SG	JF
	A4	SEE ECR-20-002623	24FEB2020	EH	JF

Bemerkungen  
NOTES

- 1 FUR FLR-Leitung nach DIN 72551, Teil 6  
FOR FLR-WIRE SEE DIN 72551, PART 6
- 2 Oberfläche  
SURFACE  
Kontaktfeder  
-verzinkt 0.8...2.2µm Sn  
min. 0.8µm Gold  
MIN. 0.8µm GOLD  
1.6-5µm Silber  
1.6-5µm SILVER
- 3 Markierung fuer Oberflaeche  
STAMPED INDICATOR FOR PLATING
- 4 TE Logo,  
Änderungsstand, Datumscode  
REVISION STATUS, DATE CODE
- 5 Massgebend ist der deutsche Text  
ONLY THE GERMAN LANGUAGE VERSION SHALL BE BINDING
- 6 Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen  
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- A4 7 Spurenuordnung in Zweispurwerkzeugen  
TRACK ALLOCATION IN TWO TRACK DIES

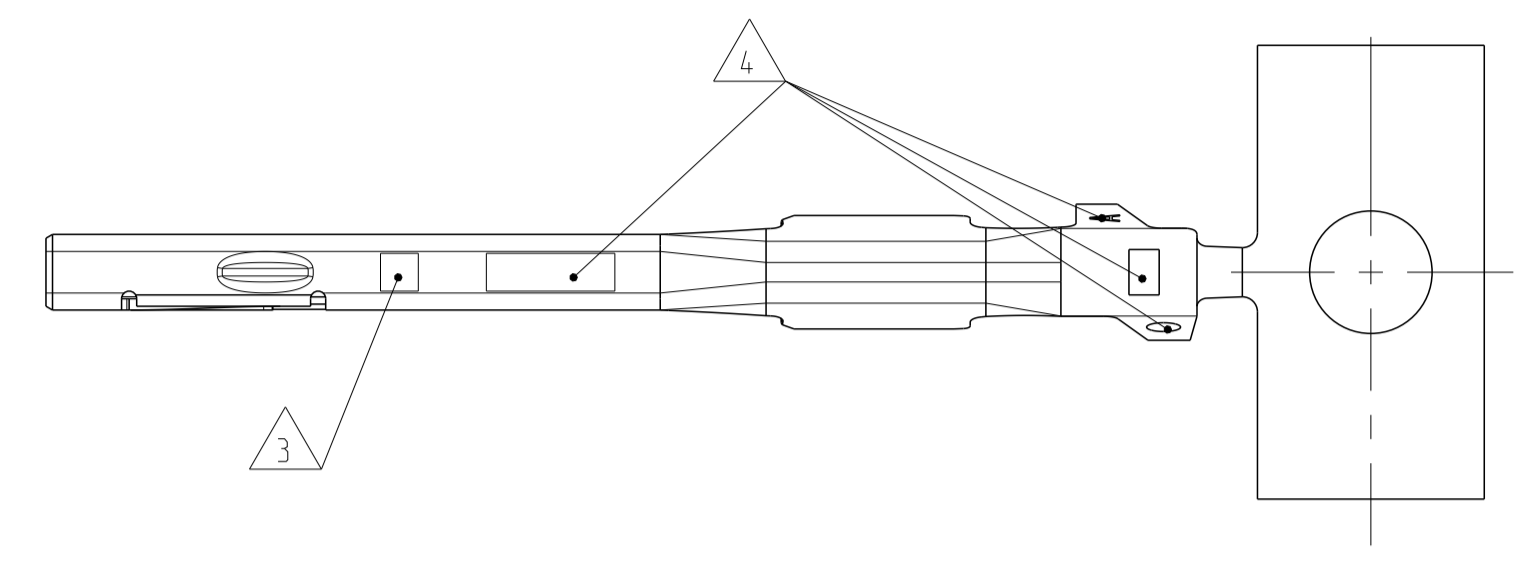

	ORDER- NO. STRIP FORM Bestell- Nr. Bandware	Rev.	MATERIAL	SURFACE Oberflaeche	MARKING Markierung	WIRE-SIZE RANGE DGB	DIMENSIONS													
							A	B	C	E	F	G	H	D ISO	J	K	L	M	N	
HIGH PERFORMANCE	1-2177909-1	A	CuNiSi	Sn	2St	0.22 - 0.35	1.7	(1.5)	1.05	0.3	0.3	1.8	(1.9)	0.9	2.5	1.6	5.5	0.1	15.25	
	1-2177909-2	A		Au	2G		1.5	(1.26)	0.9	0.3	0.3	1.8	(1.8)	0.9	2.5	1.6	5.5	0.1	15.25	
	0-2177909-3	A		Ag	2H															
STANDARD	0-2177909-1	A	CuSn8	Sn	2															
HIGH PERFORMANCE	1-2177908-1	A	CuNiSi	Sn	1St	0.13 - 0.17	1.5	(1.26)	0.9	0.3	0.3	1.8	(1.8)	0.9	2.5	1.6	5.5	0.1	15.25	
	1-2177908-2	A		Au	1G															
	0-2177908-3	A		Ag	1H															
STANDARD	0-2177908-1	A	CuSn8	Sn	1															

VERSION Ausfuehrung	ORDER- NO. STRIP FORM Bestell- Nr. Bandware	Rev.	MATERIAL	SURFACE Oberflaeche	MARKING Markierung	WIRE-SIZE RANGE DGB	DIMENSIONS															
							A	B	C	E	F	G	H	D ISO	J	K	L	M	N			
				2	3	1	WIRE CRIMP Drahtcrimp						ISOLATION CRIMP Isolationscrimp					DIMENSIONS Abmessungen [mm]				
				2	3	1	STRIP FOR Bandware															

volume Volumen	0.01	cm <sup>3</sup>
density Dichte	8.9	g/cm <sup>3</sup>
weight WITH CARRIER STRIP Gewicht mit Traegerstreifen	0.09	g

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. DIMENSIONEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS). THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).

TOLERANCING ISO 8015  
TOLERIERUNG ISO 8015

DMN: S. G. 03SEP2012  
S. G. 03SEP2012  
C. Schellhaas  
W. Mueller 03SEP2012

APVD: W. Mueller 03SEP2012

PRODUCT SPEC: 108-94.34.2  
APPLICATION SPEC: 114-94.151

NAME: MCON 050, Buchsenkontakt, clean body  
MCON 050, TERMINAL, CLEAN BODY

SIZE: A1  
CAGE CODE: 00779  
DRAWING NO.: 2208562  
SHEET: 1 OF 1  
BLATT: 1 VON 1

RESTRICTED TO: NUR FÜR: A4

CUSTOMER DRAWING /KUNDENZEICHNUNG SCALE: 10:1 MASSSTAB: 10:1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)