

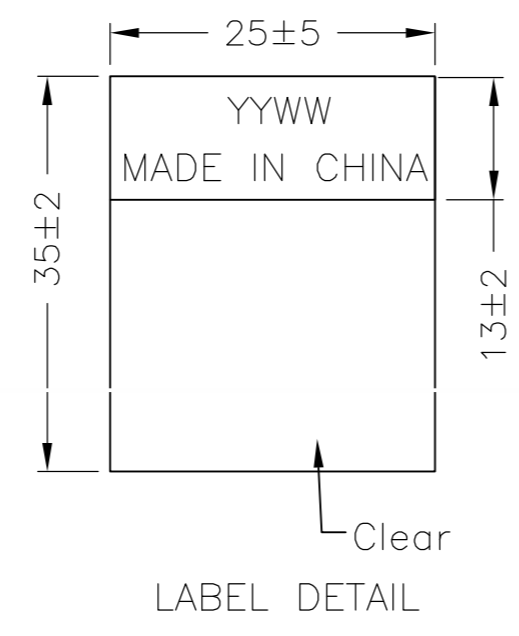


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		U3		REVISED PER ECO-21-002353	26FEB21	AP	YX

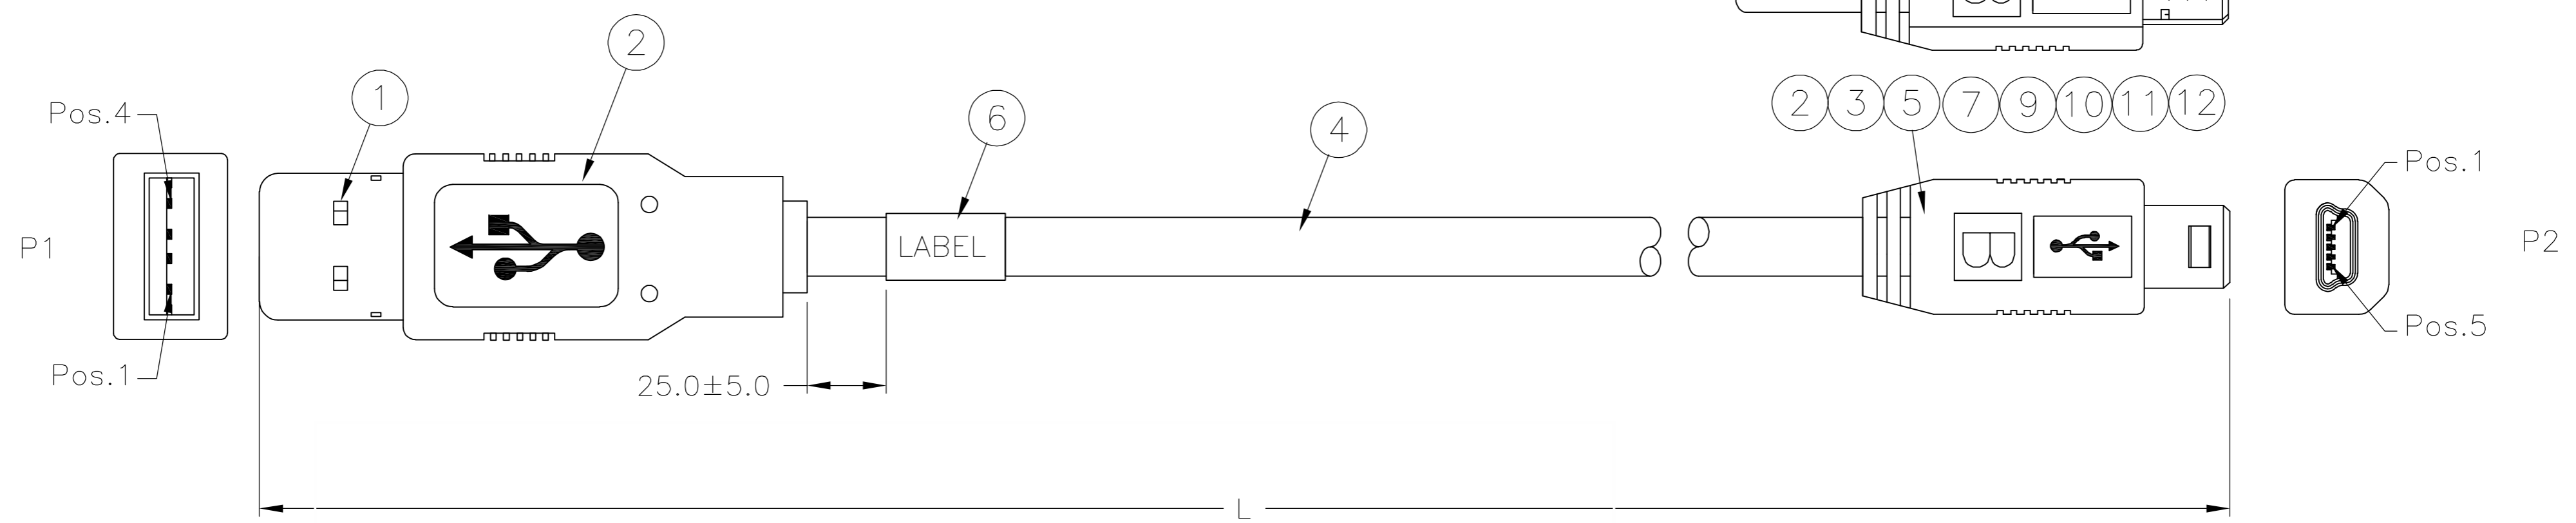

- NOTES:
- 100% ELECTRICAL TEST.
 - PACKAGE: 1PCS/PE BAG.
 - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

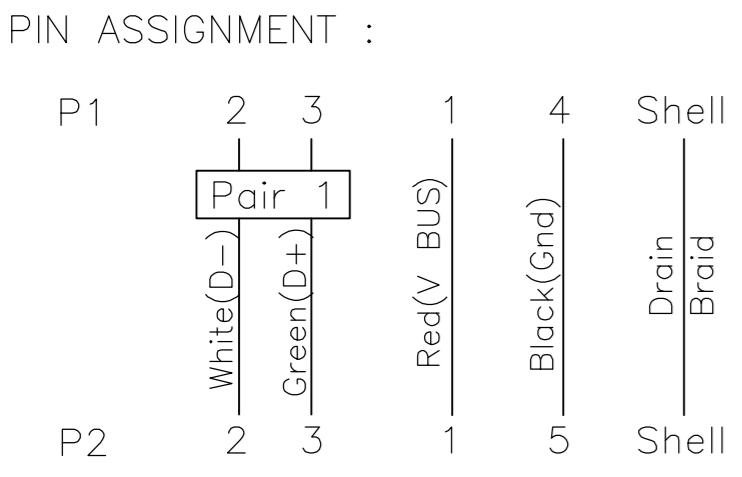

PART NO.	LENGTH(L)	CABLE AWG	CABLE O.D. (REF)
1496476-1	1000 ⁺⁰ ₋₃₀ MM	1P*28AWG+2C*26AWG	4.2 mm
1496476-2	1500 ⁺⁰ ₋₃₀ MM	1P*28AWG+2C*24AWG	4.5 mm
1496476-3	2000 ⁺⁰ ₋₃₀ MM	1P*28AWG+2C*24AWG	4.5 mm
OBSOLETE 1496476-4	3000 ⁺⁰ ₋₅₀ MM	1P*25AWG+2C*22AWG	5.2 mm
OBSOLETE 1496476-5	5000 ⁺⁰ ₋₅₀ MM	1P*25AWG+2C*20AWG	5.2 mm
OBSOLETE 1496476-6	305 ⁺⁰ ₋₃₀ MM	1P*28AWG+2C*28AWG	3.5 mm

OBSOLETE

QTY	UNIT	DESCRIPTION	ITEM
12	PC	UL TAPE, W: 9MM, COLOR: BLACK	12
11	PC	CONNECTOR,MINI USB B TYPE	11
10	PC	CONNECTOR,MINI USB B TYPE	10
9	MR	Heat Shrink Tubing 1.0MM BLACK	9
8	MR	Copper Foil, W: 5.0MM	8
7	MR	Heat Shrink Tubing, 1.5mm, Color: Black	7
7	MR	PVC TUBE, ID: 1.5MM, COLOR: BLACK	7
6	MR	Heat Shrink Tubing, 1.0mm, Color: Black	6
6	PC	LABEL , 25*35mm.	6
5	MR	Copper Foil, W: 10.0MM.	5
4	MR	USB 2.0 Cable, 1P(Signal)+2C(Power)+Al/Mylar +Drain+Braid, Color: Black.	4
3	PC	Mini USB, B PLUG, SOLDER TYPE	3
2	KG	Overmolded PVC,Color: Black(BK01).Shore A 80±5	2
1	PC	USB A Type Solder Contacts: Gold Plated 30U" Shell: Nickel Plated, Insulation: White	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	BOVEY LIU	28/JUN/01
CHK	BEVIN	28/JUN/01
APVD	MARK	28/JUN/01

TE Connectivity

CABLE ASSY, MINI USB B TYPE TO USB A TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=1496476	-

CUSTOMER DRAWING

SCALE: N.T.S. SHEET 1 of 1 REV U3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)