

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6MM)
 DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05

NOTE:

- MATERIAL:
 HOUSING: THERMOPLASTIC HIGH TEMP., UL94 V-0, COLOR: BLACK.
 CONTACT: PHOSPHOR BRONZE, H, THICKNESS: 0.35mm.
 SHELL: BRASS, THICKNESS: 0.25mm.
- FINISH:
 CONTACT: GOLD PLATED (SEE TABLE) IN CONTACT AREA,
 GOLD FLASH ON SOLDER TAILS,
 50u" MIN. NICKEL UNDERPLATED ALL OVER.
 SHELL: 20u" MIN. NICKEL PLATED.
- WAVE SOLDER CAPABLE TO 265°C PER 109-202,
 CONDITION B.

OBSOLETE	W/O	W/O	50µ"	1-1734712-4
			30µ"	1-1734712-3
			15µ"	1-1734712-2
	W/O	0.6mm	6µ"	1-1734712-1
			50µ"	1-1734712-4
			30µ"	1-1734712-3
			15µ"	1-1734712-2
			6µ"	1-1734712-1
	LED	POLARIZATION RIB THICKNESS	MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN O. HU 21MAR2006
 CHK S. HOU 21MAR2006
 APVD WJ. KE 21MAR2006







PRODUCT SPEC 108-57535
 APPLICATION SPEC -

SIZE A3 CAGE CODE 00779 DRAWING NO. C=1734712 RESTRICTED TO -

WEIGHT 4.5 GRAMS
 MATERIAL SEE NOTE FINISH SEE NOTE

CUSTOMER DRAWING SCALE - SHEET 1 OF 4 REV A2


STE TE Connectivity
 MODULAR JACK, RJ45/RJ11, COMBO, DIP, SIDE ENTRY.

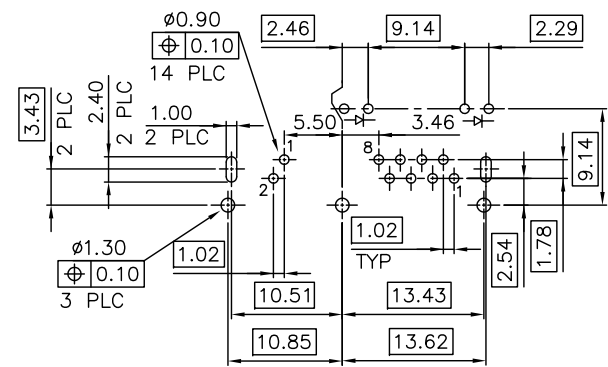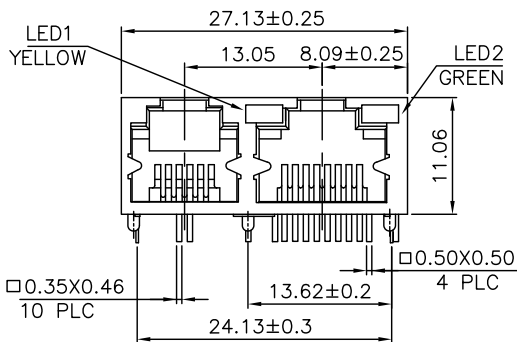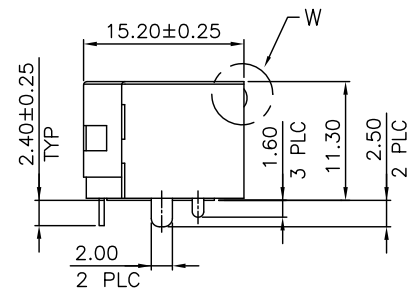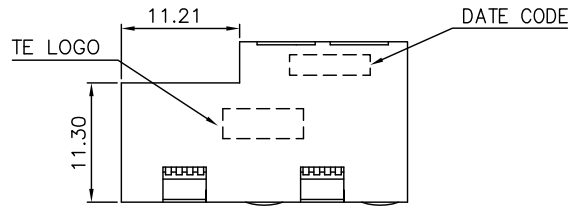

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6MM)
 DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05

NOTE:

- MATERIAL:
 HOUSING: THERMOPLASTIC HIGH TEMP., UL94 V-0, COLOR: BLACK.
 CONTACT: PHOSPHOR BRONZE, THICKNESS: 0.35mm.
 SHELL: BRASS, THICKNESS: 0.25mm.
 LED LIGHT: EPOXY RESIN, THICKNESS: 0.50X0.50mm.
- FINISH:
 CONTACT: GOLD PLATED (SEE TABLE) IN CONTACT AREA,
 GOLD FLASH ON SOLDER TAILS,
 50u" MIN. NICKEL UNDERPLATED ALL OVER.
 SHELL: 20u" MIN. NICKEL PLATED.
- LED MUST BE REFLOW COMPATIBLE TO FOLLOWING TEMPERATURE PROFILE (FOR 1 CYCLE): ABOVE 160°C FOR 120 SECONDS, PEAKING AT 245°C FOR 20~40 SECONDS.
- LED DEFECT RATE IS 6000 PPM MAX. AFTER IR REFLOW PROCESS AS NOTE 3.
- WAVE SOLDER CAPABLE TO 265°C PER 109-202, CONDITION B.

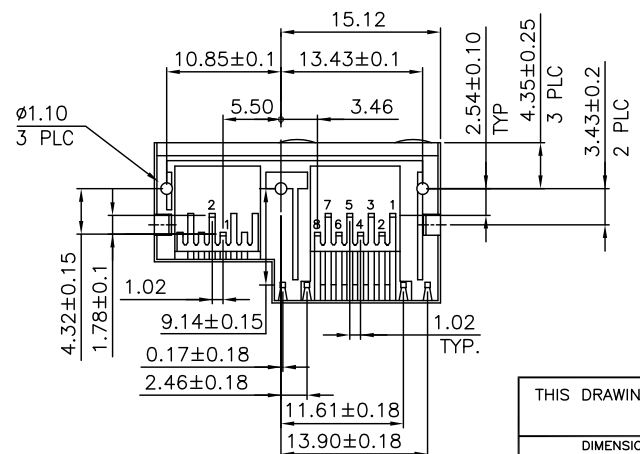


OBSOLETE	W/	50μ"	2-1734712-4
		30μ"	2-1734712-3
		15μ"	2-1734712-2
OBSOLETE		6μ"	2-1734712-1
	LED	MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.


DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN -	CHK -	APVD -	NAME
	0 PLC ± -	PRODUCT SPEC	MODULAR JACK, RJ45/RJ11, COMBO, DIP, SIDE ENTRY.		
	1 PLC ± 0.3	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
	2 PLC ± 0.2		A3	00779	C=1734712
	3 PLC ± 0.1		WEIGHT	RESTRICTED TO	
	4 PLC ± -				
	ANGLES ± ±				
MATERIAL SEE NOTE	FINISH SEE NOTE	CUSTOMER DRAWING		SCALE -	SHEET 2 of 4
				REV A2	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2013 BY TE CONNECTIVITY. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1			

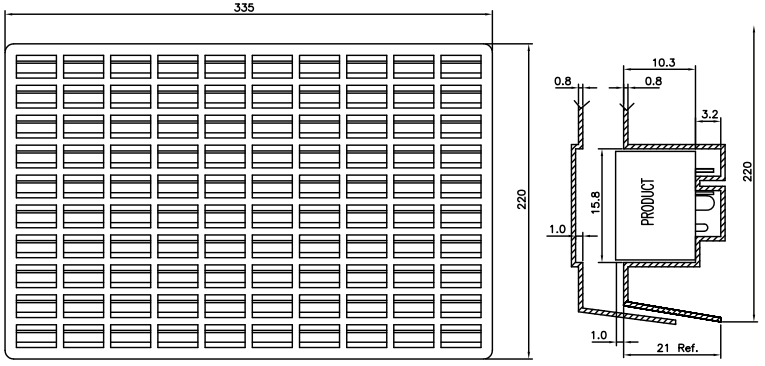


NOTE: 1. MATERIAL: PET T: 0.8mm.


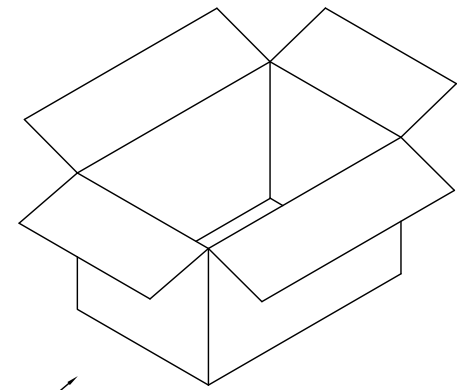


CARTON
 345mm(L)X235mm(W)X195mm(H)
 11 TRAY/CARTON
 TOTAL: 1100 PCS
 GROSS WEIGHT: 7Kg


TOP COVER
 (ONLY FOR TOP TRAY)



MODULAR JACK

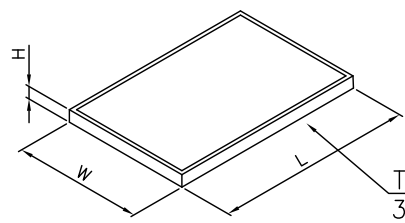

TRAY
 335mm(L)X220mm(W)X21mm(H)
 100 PCS/TRAY

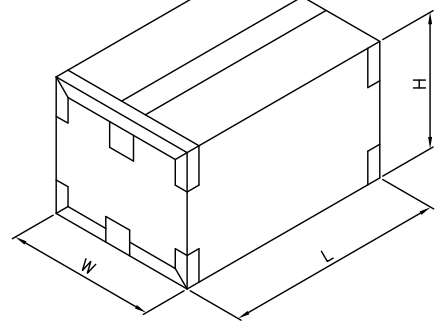

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	-	TE Connectivity MODULAR JACK, RJ45/RJ11, COMBO, DIP, SIDE ENTRY.			
DIMENSIONS: MM		CHK	-			NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-			PRODUCT SPEC	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		FINISH	-			APPLICATION SPEC	
MATERIAL		WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A3	00779	C=1734712	-
CUSTOMER DRAWING				SCALE	SHEET	4 of 4	REV A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)