


REV. 2  
DCO 102710

|                 |                           |
|-----------------|---------------------------|
| COIL: @ 25°C    |                           |
| RESISTANCE      | 300 OHMS ±10%             |
| NOMINAL VOLTAGE | 26.5 VDC                  |
| MUST OPERATE    | 13.0 VDC                  |
| MUST RELEASE    | 7.0 VDC MAX, 2.3 VDC MIN. |

|                                     |                             |
|-------------------------------------|-----------------------------|
| ENVIRONMENT:                        |                             |
| VIBRATION                           | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK                               | 50 g's 11 MS. DURATION      |
| TEMPERATURE                         | -65 °C TO +125 °C           |
| NOTES: OPERATE & RELEASE 15 MS MAX. |                             |
| OPERATE BOUNCE 5 MS MAX.            |                             |
| RELEASE BOUNCE 5 MS MAX.            |                             |

CUSTOMER DATA SHEET

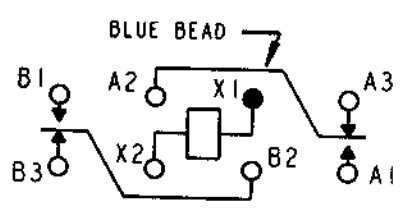

TERMINAL VIEW

|                 |                                 |
|-----------------|---------------------------------|
| CONTACT RATING: | 10 AMPS 28 VDC                  |
|                 | 5 AMPS 115 VAC/400 Hz RESISTIVE |
|                 | 50,000 OPERATIONS               |

DR. BSH 8/17/01 CK. TLG 8-20-01



|           |                   |
|-----------|-------------------|
| CUST.     | OPL               |
| CUST. NO. | M5757/23-005 REV. |

"07" RELAY

B07D034BC2-0053

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)