


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

- 1 INSULATION SLEEVE  
HEAT SHRINKABLE, RADIATION CROSS-LINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- 2 SOLDER PREFORM WITH FLUX  
SNG3 SRAP PER QQ-S-571.

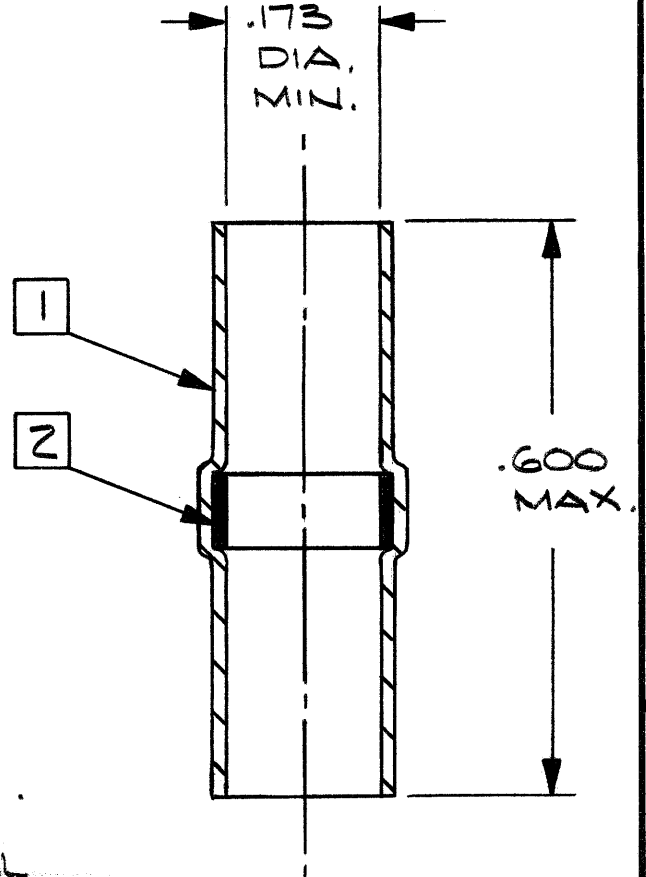

**NOTES:**

- a) THESE PARTS ARE DESIGNED FOR USE IN RAYCHEM SHIELD TERMINATION KIT D-659-0027.
- b) PARTS MAY BE INSTALLED WITH HOT AIR OR INFRARED HEATERS.
- c) ACCEPTANCE SAMPLING SHALL BE IN ACCORDANCE WITH INSPECTION LEVEL I OF MIL-STD-105. THE ACCEPTABLE QUALITY LEVEL (AQL) SHALL BE 4.0.

If this document is printed it becomes uncontrolled.  
Check with the web for latest revision.

DEVICES SPECIFICATION CONTROL DRAWING

DO NOT SCALE THIS DRAWING		DRAWN CRN:62976		RAYCHEM		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: .XXX : ± — .XX : ± — .X : ± —		CHECKED		TITLE SOLDER SLEEVE SHIELD TERMINATOR		DWG. NO. D-659-0039	
		APPROVED					
MATERIAL		APPROVED		SIZE A		CODE IDENT. NO. 06090	
		APPROVED		SCALE		WEIGHT	
FINISH		PART NO.		SHEET		OF	
		PROJECT					

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)