

SPECIFICATION CONTROL DRAWING

55PC0824


TITLE TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLT

Date 12-10-96

Revision B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0814

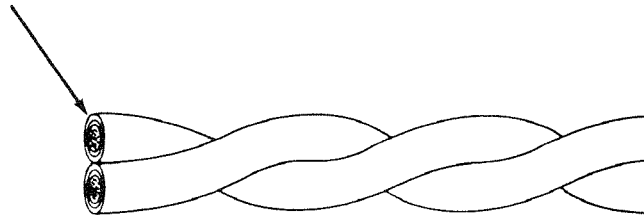

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.)			WEIGHT (lb/1000 ft.)	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC0824-24-*	24	.084	.087	.090	4.41	4.66
55PC0824-22-*	22	.096	.099	.102	6.31	6.60
55PC0824-20-*	20	.113	.116	.119	9.39	9.72
55PC0824-18-*	18	.132	.136	.139	14.05	14.57
55PC0824-16-*	16	.148	.152	.156	17.81	18.40

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 INSULATION FLAWS:
 Impulse Dielectric Test, 8.0 kV (peak)

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.
 Example: AWG 22, black and white component wires;
 55PC0824-22-0/9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INNVATAING FOR BID.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2-Raychem FAX: 1-415-361-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)