


REV. 0
DCO 143571

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	RESISTANCE	1350 OHMS ±10%
	NOMINAL VOLTAGE	26.5 VDC
	MUST OPERATE	13.5 VDC
	MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

CUSTOMER DATA SHEET

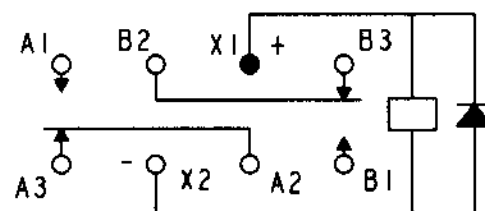

TERMINAL VIEW

ENVIRONMENT:		
VIBRATION	10 Hz TO 3000 Hz @ 30 g's	
SHOCK	75 g's 6 MS. DURATION	
TEMPERATURE	-65 °C TO +125 °C	
NOTES:	OPERATE 4 MS MAX.	
	RELEASE 6 MS MAX.	
	CONTACT STABILATION 2.0 MS MAX.	

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. ASB 29 MAY 02 *CR 5/29/02*



CUST. OPL
CUST. NO. M39016/37-021P REV.

"3SBC" RELAY

3SBC1648A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)