

REV. 2

DCO 142602


TOL. = ±.010

COIL: @ 25°C	
RESISTANCE	210 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.4 VDC
MUST RELEASE	3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

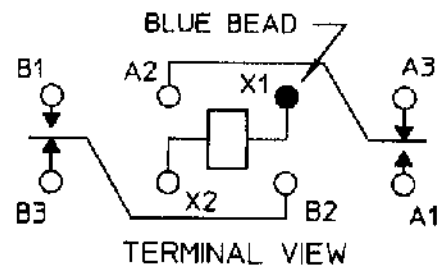

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. PBB 1/9/01 CK 10/09/08



CUST. QPL  
CUST. NO. M39016/13-056P REV. '3SBC' RELAY

3SBC2001A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)