


CUSTOMER DRAWING

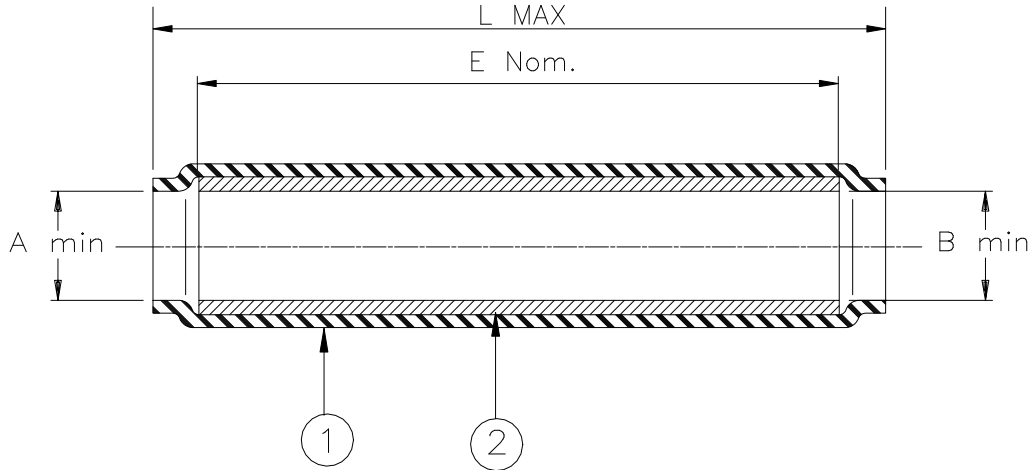

Product Name	Product Dimensions			
	L max	E nom	øA min	øB min
D-436-73	40.2 (1.585)	30.5 (1.2)	6 (0.236)	5.6 (0.220)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING LINER: Immersion resistant thermoplastic. Color: clear

APPLICATION

1. This part is designed to provide an immersion resistant seal on wires having an insulation diameters between 1.9 (0.075) and 5.1 (0.200) and a temperature rating of at least +135°C.
2. Temperature range: -55°C to +150°C.

Cable dimension:

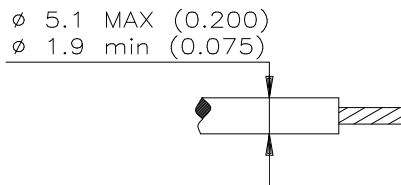

			TITLE: SEALING SLEEVE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets] DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009		Raychem Devices	DOCUMENT NO.: D-436-73		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV: A1	DATE: May 2, 2012	
PREPARED BY: RODRIGUEZ	CAGE CODE: 06090	ECO NUMBER: ECO-12-008366	SCALE: NTS	SIZE: A	SHEET: 1 of 2

© 1998-2012 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)