
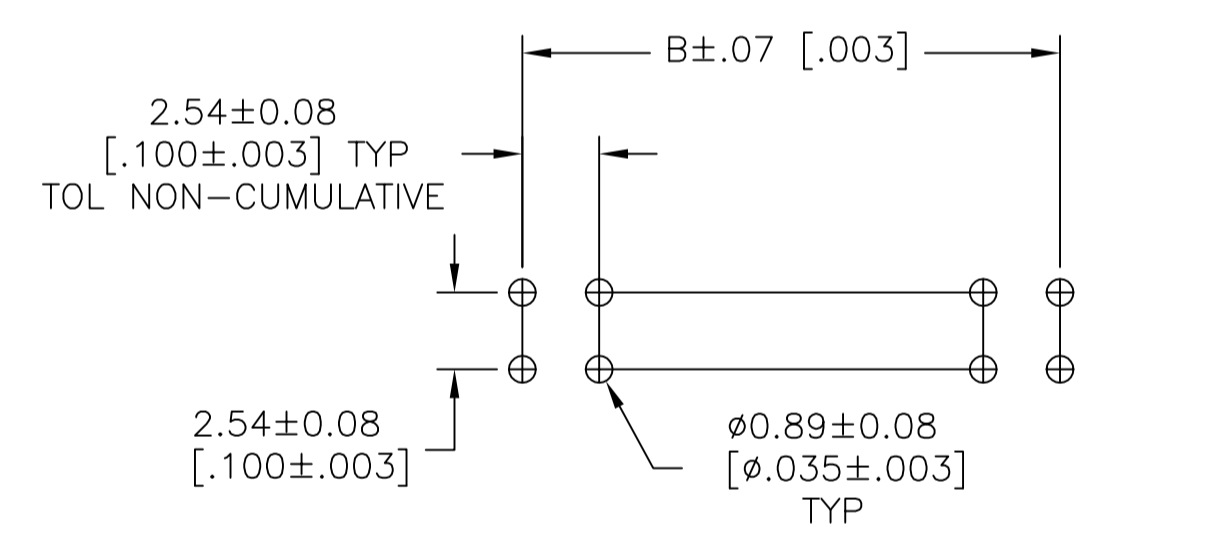
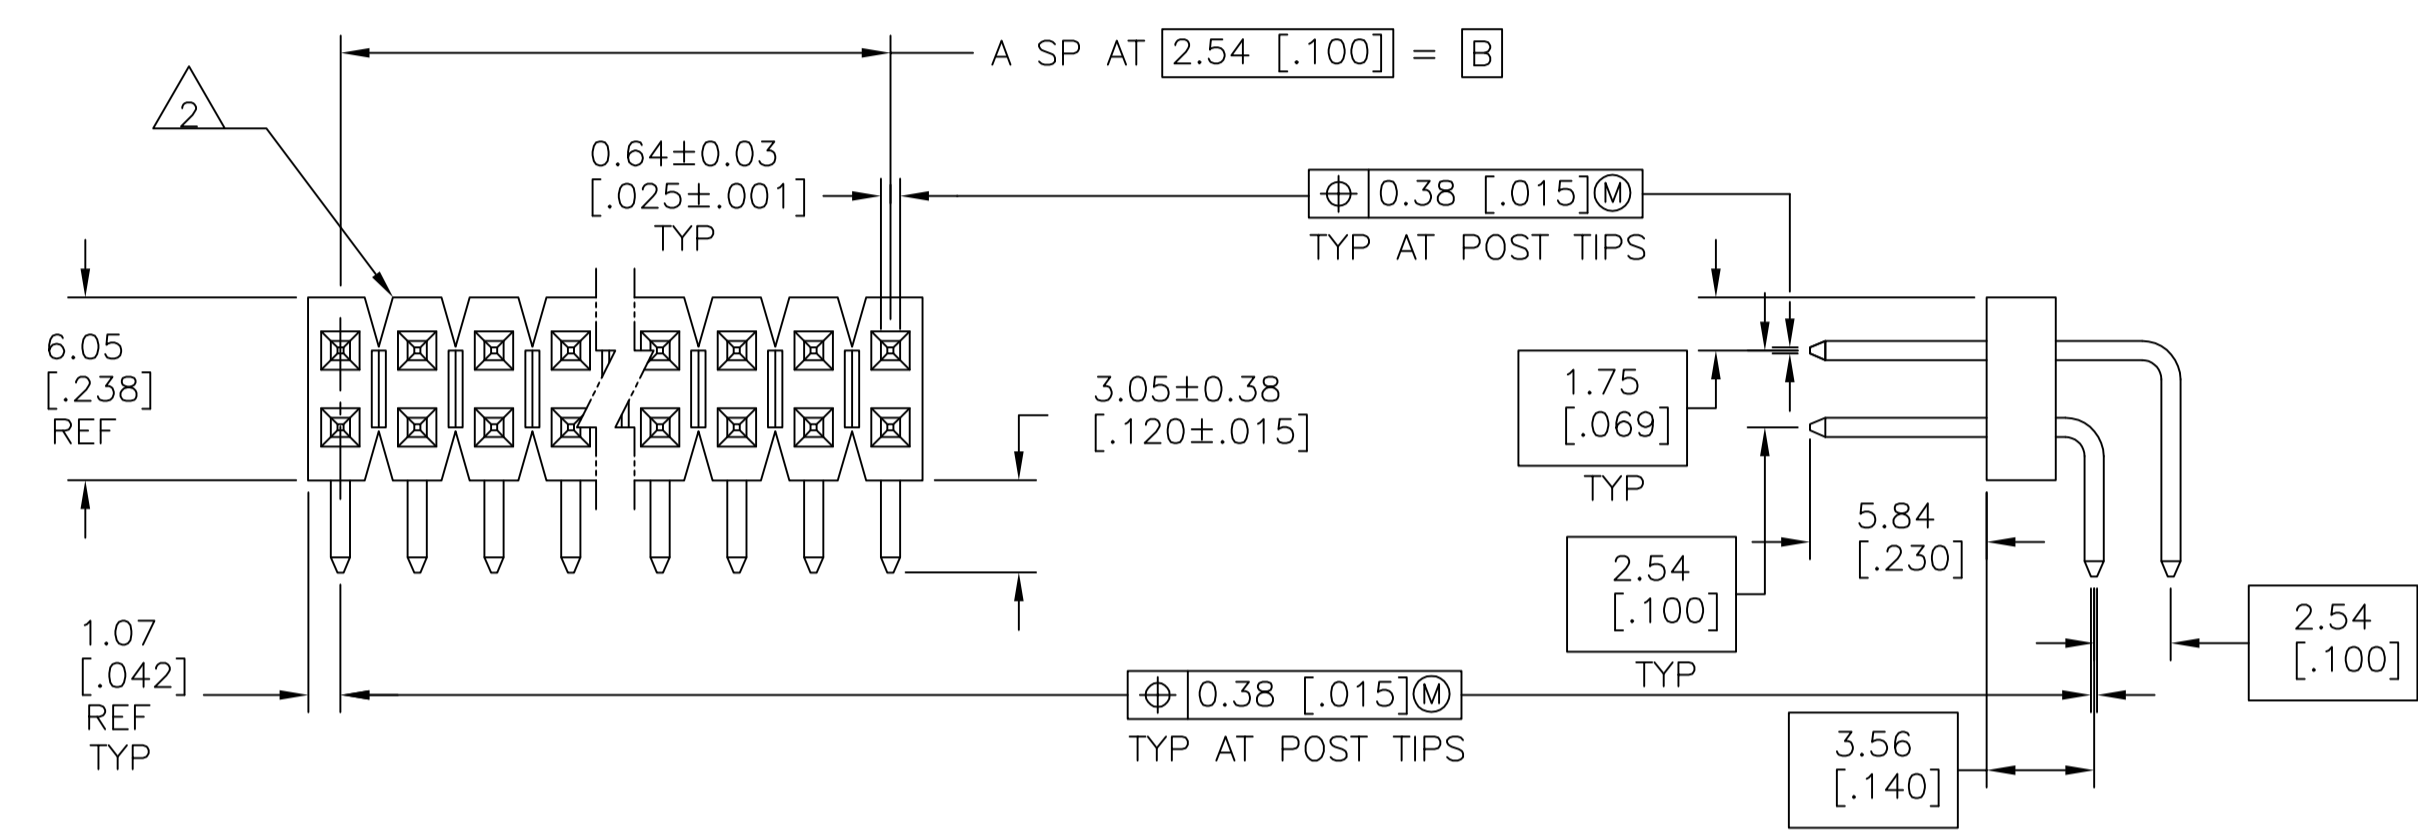


REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
M4		REVISED PER ECO-14-000544	19MAY2014	NK	MM
M5		REVISED PER ECO-17-010159	13JUL2017	RS	MM

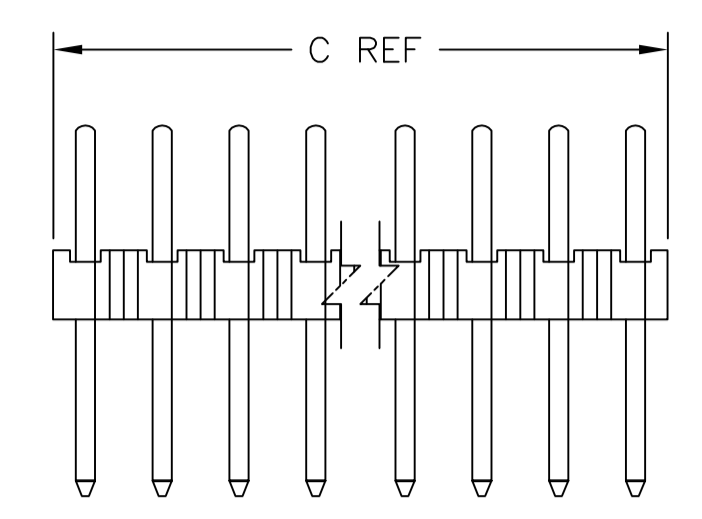

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 0.00254 [.000100] -0.00508 [.000200] MATTE TIN-LEAD OVER 0.00127 [.000050] NICKEL.
- 4 0.00254 [.000100] -0.00508 [.000200] BRIGHT TIN OVER 0.00127 [.000050] NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. POSTS: COPPER ALLOY
- 7 0.00254 [.000100] -0.00508 [.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL.
- 8 HIGH TEMPERATURE CONFIGURATION.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	△	△	101.19	[3.984]	99.06	[3.900]	39	80	9-103330-0
OBSOLETE	△	△	98.65	[3.884]	96.52	[3.800]	38	78	8-103330-9
OBSOLETE	△	△	96.11	[3.784]	93.98	[3.700]	37	76	8-103330-8
OBSOLETE	△	△	93.57	[3.684]	91.44	[3.600]	36	74	8-103330-7
OBSOLETE	△	△	91.03	[3.584]	88.9	[3.500]	35	72	8-103330-6
OBSOLETE	△	△	88.49	[3.484]	86.36	[3.400]	34	70	8-103330-5
OBSOLETE	△	△	85.95	[3.384]	83.82	[3.300]	33	68	8-103330-4
OBSOLETE	△	△	83.41	[3.284]	81.28	[3.200]	32	66	8-103330-3
OBSOLETE	△	△	80.87	[3.184]	78.74	[3.100]	31	64	8-103330-2
OBSOLETE	△	△	78.33	[3.084]	76.2	[3.000]	30	62	8-103330-1
OBSOLETE	△	△	75.79	[2.984]	73.66	[2.900]	29	60	8-103330-0
OBSOLETE	△	△	73.25	[2.884]	71.12	[2.800]	28	58	7-103330-9
OBSOLETE	△	△	70.71	[2.784]	68.58	[2.700]	27	56	7-103330-8
OBSOLETE	△	△	68.17	[2.684]	66.04	[2.600]	26	54	7-103330-7
OBSOLETE	△	△	65.63	[2.584]	63.5	[2.500]	25	52	7-103330-6
OBSOLETE	△	△	63.09	[2.484]	60.96	[2.400]	24	50	7-103330-5
OBSOLETE	△	△	60.55	[2.384]	58.42	[2.300]	23	48	7-103330-4
OBSOLETE	△	△	58.01	[2.284]	55.94	[2.200]	22	46	7-103330-3
OBSOLETE	△	△	55.47	[2.184]	53.34	[2.100]	21	44	7-103330-2
OBSOLETE	△	△	52.93	[2.084]	50.8	[2.000]	20	42	7-103330-1
OBSOLETE	△	△	50.39	[1.984]	48.26	[1.900]	19	40	7-103330-0
OBSOLETE	△	△	47.85	[1.884]	45.72	[1.800]	18	38	6-103330-9
OBSOLETE	△	△	45.31	[1.784]	43.18	[1.700]	17	36	6-103330-8
OBSOLETE	△	△	42.77	[1.684]	40.64	[1.600]	16	34	6-103330-7
OBSOLETE	△	△	40.23	[1.584]	38.1	[1.500]	15	32	6-103330-6
OBSOLETE	△	△	37.69	[1.484]	35.56	[1.400]	14	30	6-103330-5
OBSOLETE	△	△	35.15	[1.384]	33.02	[1.300]	13	28	6-103330-4
OBSOLETE	△	△	32.61	[1.284]	30.48	[1.200]	12	26	6-103330-3
OBSOLETE	△	△	30.07	[1.184]	27.94	[1.100]	11	24	6-103330-2
OBSOLETE	△	△	27.53	[1.084]	25.4	[1.000]	10	22	6-103330-1
OBSOLETE	△	△	24.99	[.984]	22.86	[.900]	9	20	6-103330-0
OBSOLETE	△	△	22.45	[.884]	20.32	[.800]	8	18	5-103330-9
OBSOLETE	△	△	19.91	[.784]	17.78	[.700]	7	16	5-103330-8
OBSOLETE	△	△	17.37	[.684]	15.24	[.600]	6	14	5-103330-7
OBSOLETE	△	△	14.83	[.584]	12.7	[.500]	5	12	5-103330-6
OBSOLETE	△	△	12.29	[.484]	10.16	[.400]	4	10	5-103330-5
OBSOLETE	△	△	9.75	[.384]	7.62	[.300]	3	8	5-103330-4
OBSOLETE	△	△	7.21	[.284]	5.08	[.200]	2	6	5-103330-3
OBSOLETE	△	△	4.67	[.184]	2.54	[.100]	1	4	5-103330-2
OBSOLETE	△	△	2.13	[.084]				2	5-103330-1

△	△	101.19	[3.984]	99.06	[3.900]	39	80	4-103330-1
△	△	101.19	[3.984]	99.06	[3.900]	39	80	4-103330-0
△	△	98.65	[3.884]	96.52	[3.800]	38	78	3-103330-9
△	△	96.11	[3.784]	93.98	[3.700]	37	76	3-103330-8
△	△	93.57	[3.684]	91.44	[3.600]	36	74	3-103330-7
△	△	91.03	[3.584]	88.9	[3.500]	35	72	3-103330-6
△	△	88.49	[3.484]	86.36	[3.400]	34	70	3-103330-5
△	△	85.95	[3.384]	83.82	[3.300]	33	68	3-103330-4
△	△	83.41	[3.284]	81.28	[3.200]	32	66	3-103330-3
△	△	80.87	[3.184]	78.74	[3.100]	31	64	3-103330-2
△	△	78.33	[3.084]	76.2	[3.000]	30	62	3-103330-1
△	△	75.79	[2.984]	73.66	[2.900]	29	60	3-103330-0
△	△	73.25	[2.884]	71.12	[2.800]	28	58	2-103330-9
△	△	70.71	[2.784]	68.58	[2.700]	27	56	2-103330-8
△	△	68.17	[2.684]	66.04	[2.600]	26	54	2-103330-7
△	△	65.63	[2.584]	63.5	[2.500]	25	52	2-103330-6
△	△	63.09	[2.484]	60.96	[2.400]	24	50	2-103330-5
△	△	60.55	[2.384]	58.42	[2.300]	23	48	2-103330-4
△	△	58.01	[2.284]	55.94	[2.200]	22	46	2-103330-3
△	△	55.47	[2.184]	53.34	[2.100]	21	44	2-103330-2
△	△	52.93	[2.084]	50.8	[2.000]	20	42	2-103330-1
△	△	50.39	[1.984]	48.26	[1.900]	19	40	2-103330-0
△	△	47.85	[1.884]	45.72	[1.800]	18	38	1-103330-9
△	△	45.31	[1.784]	43.18	[1.700]	17	36	1-103330-8
△	△	42.77	[1.684]	40.64	[1.600]	16	34	1-103330-7
△	△	40.23	[1.584]	38.1	[1.500]	15	32	1-103330-6
△	△	37.69	[1.484]	35.56	[1.400]	14	30	1-103330-5
△	△	35.15	[1.384]	33.02	[1.300]	13	28	1-103330-4
△	△	32.61	[1.284]	30.48	[1.200]	12	26	1-103330-3
△	△	30.07	[1.184]	27.94	[1.100]	11	24	1-103330-2
△	△	27.53	[1.084]	25.4	[1.000]	10	22	1-103330-1
△	△	24.99	[.984]	22.86	[.900]	9	20	1-103330-0
△	△	22.45	[.884]	20.32	[.800]	8	18	103330-9
△	△	19.91	[.784]	17.78	[.700]	7	16	103330-8
△	△	17.37	[.684]	15.24	[.600]	6	14	103330-7
△	△	14.83	[.584]	12.7	[.500]	5	12	103330-6
△	△	12.29	[.484]	10.16	[.400]	4	10	103330-5
△	△	9.75	[.384]	7.62	[.300]	3	8	103330-4
△	△	7.21	[.284]	5.08	[.200]	2	6	103330-3
△	△	4.67	[.184]	2.54	[.100]	1	4	103330-2
△	△	2.13	[.084]				2	103330-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J.MARTINELLI 19OCT92	TE Connectivity ASSY, HEDR, BRKAWAY, MOD II, DUBL ROW, .100X.100 C/L, RHT ANG, WITH .025 SQRE POSTS	
DIMENSIONS: mm [INCHES]		23NOV92		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B.FLINCHBAUGH 23NOV92	NAME	
0 PLC ± -	1 PLC ± -	APPLICATION SPEC		SIZE
2 PLC ± -	3 PLC ± 0.13 [.005]	WEIGHT		CAGE CODE
4 PLC ± -	ANGLES ± -	DRAWING NO		RESTRICTED TO
MATERIAL FINISH SEE TABLE		A1 00779		SCALE 4:1
REMARKS		CUSTOMER DRAWING		SHEET 1 of 1
PLATING		C B A		REV M5
C		B		
B		A		
A		NO OF POSN		
PART NUMBER		PART NUMBER		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)