



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	C		REVISED PER ECO-14-006554	09MAY2014	NK	MM

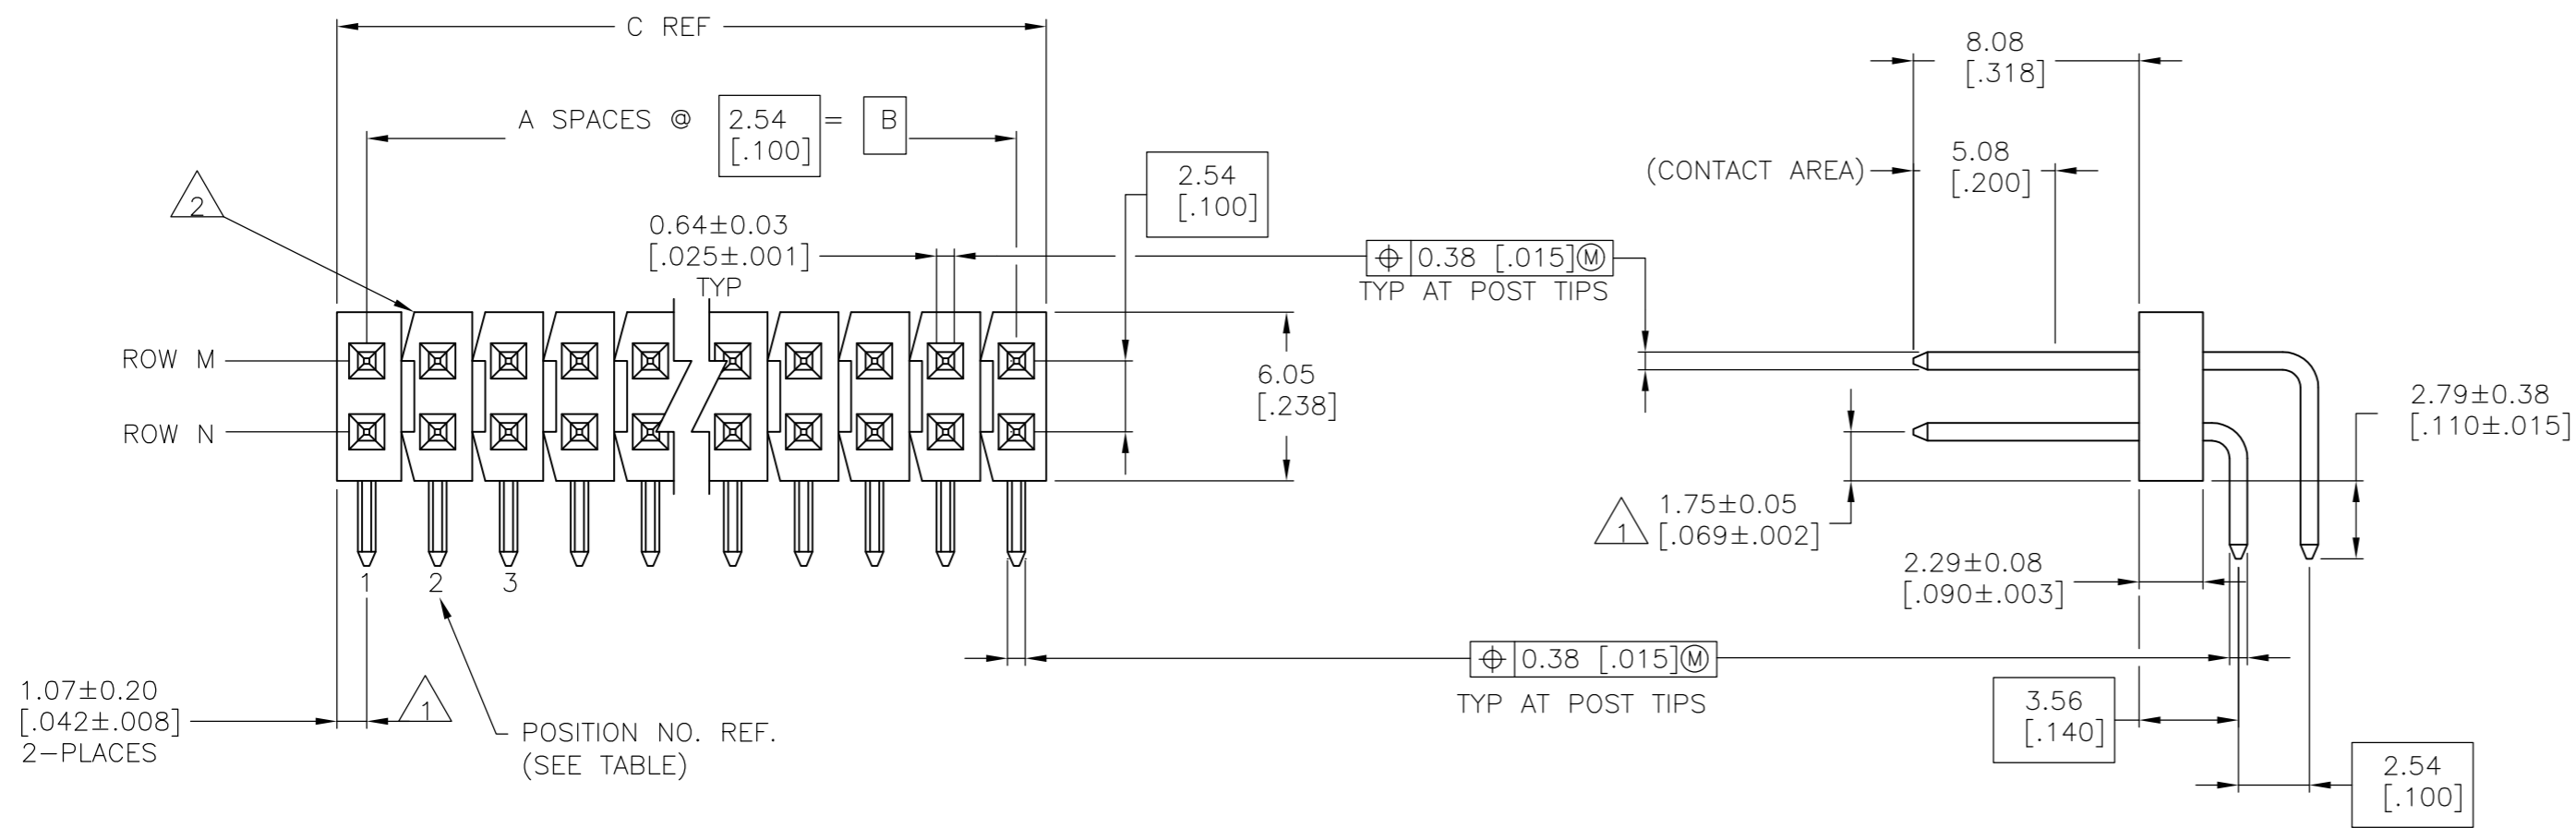

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 FOR ACTIVE POSITION SIZES 4 AND ABOVE, POSTS WILL BE SELECTIVELY SWAGED TO PROVIDE CONNECTOR RETENTION TO THE PC BOARD UNTIL SOLDERED. FOR POSITION SIZE 2, POSTS WILL BE KINKED.(SEE TABLE FOR RETENTION FEATURE LOCATION)
- 4 HOUSING: GLASS FILLED THERMOPLASTIC, COLOR, BLACK. (WILL WITHSTAND VAPOR PHASE REFLOW.)
- 5 0.000076 [.0000030] MIN GOLD OVER 0.00068[.000027]Pd/Ni ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.

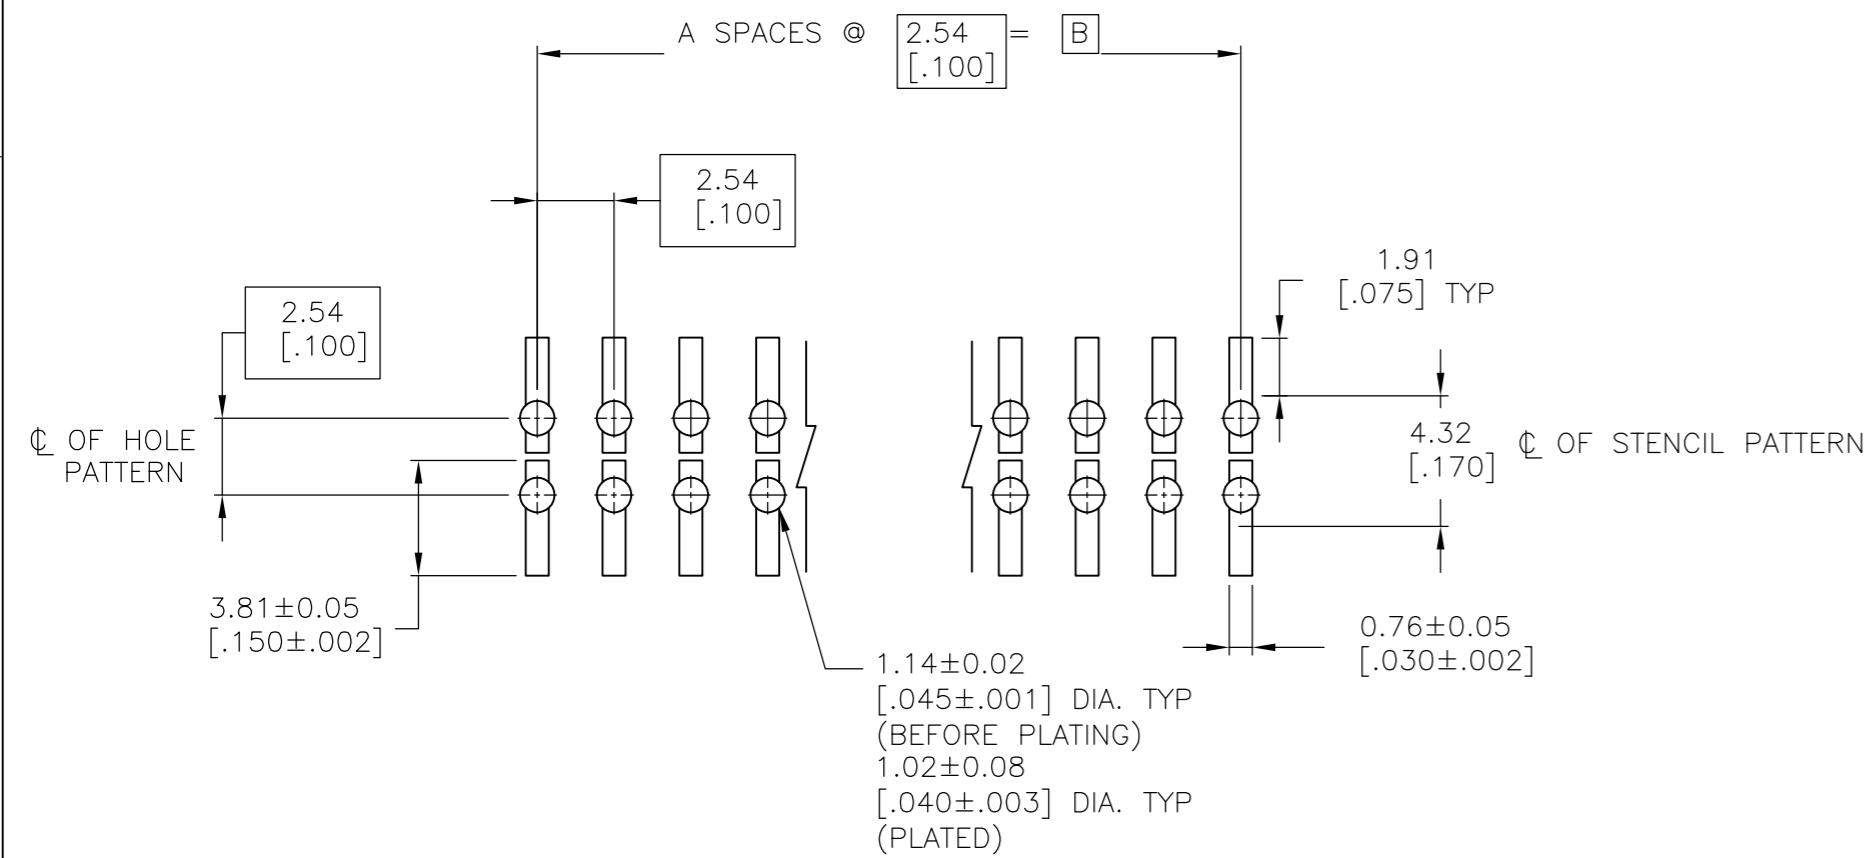

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR 1.60[.063] THICK PC BOARD AND 0.305[.0120] STENCIL THICK

5	1,2,39,40	1,2,39,40	101.19 [3.984]	99.06 [3.900]	39	80	8-1977962-0
5	1	1	2.13 [.084]	-	0	2	1977962-2
PLATING	ROW M	ROW N	C	B	A	NO. OF POSITIONS	PART NUMBER
	HOLD-DOWN POST CONFIG. LOCATIONS.						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN KIRAN HOLAL 21SEP2013	TE Connectivity
	0 PLC ± -	CHK MIKE MILLER 21SEP2013	
	1 PLC ± -	APVD MIKE MILLER 21SEP2013	
	2 PLC ± 0.51[.02]	NAME	
MATERIAL	FINISH	WEIGHT	PRODUCT SPEC APPLICATION SPEC NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, HIGH TEMP., RIGHT ANGLE, DOUBLE ROW, .100 X.100 CL., W/.025 SQ. POSTS WITH HOLD-DOWN CONFIGURATION.
	SEE TABLE	CUSTOMER DRAWING	SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=1977962 RESTRICTED TO: -
		SCALE: 4:1	SHEET: 1 OF 1 REV: C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)