


- 1 POST TO WITHSTAND 13 NEWTONS (3 LBS) MINIMUM AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
- 2 TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- 3 MEASURED AT \perp
- 4 PLASTIC FLASH PERMITTED IN THIS AREA.
- 5 PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
- 6 ONE HOLE MAY BE UNDERSIZED 0.81-0.89 [.032-.035] DIA. FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- 7 MATERIAL: HEADER-THERMOPLASTIC POLYESTER
94V-0 (NATURAL)
POST-COPPER ALLOY
FINISH-USE PLATING NOTES 13 & 14 FOR -2 THRU -28
AND NOTES 13 & 15 FOR -32 THRU -58
- 8 COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- 9 PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
- 10 POSTS TO BE MEASURED WHEN STRIP IS HELD FLAT.
- 11 POST MUST WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
- 12 DIMENSION SHOULD BE 3.30 [.130] MIN WHEN MATING WITH A MTA-100 CONNECTOR ASSEMBLY OR A CST-100 CONNECTOR ASSEMBLY.
- 13 PLATING: GOLD PLATE AREA, 0.00038 [.000015] GOLD OR 0.000076 [.000003] MIN GOLD FLASH OVER 0.000030 [.000012] PALLADIUM NICKEL PER TE CONNECTIVITY'S DISCRETION ,ALL SIDES,OVER NICKEL UNDERPLATE, 0.00127 [.000050] MIN. ALL SIDES AND ENTIRE LENGTH OF POST.
- 14 PLATING: MATTE TIN PLATE AREA, 0.00381-0.00889 [.000150-.000350] THICK, ALL FOUR SIDES 3.18 [.125].

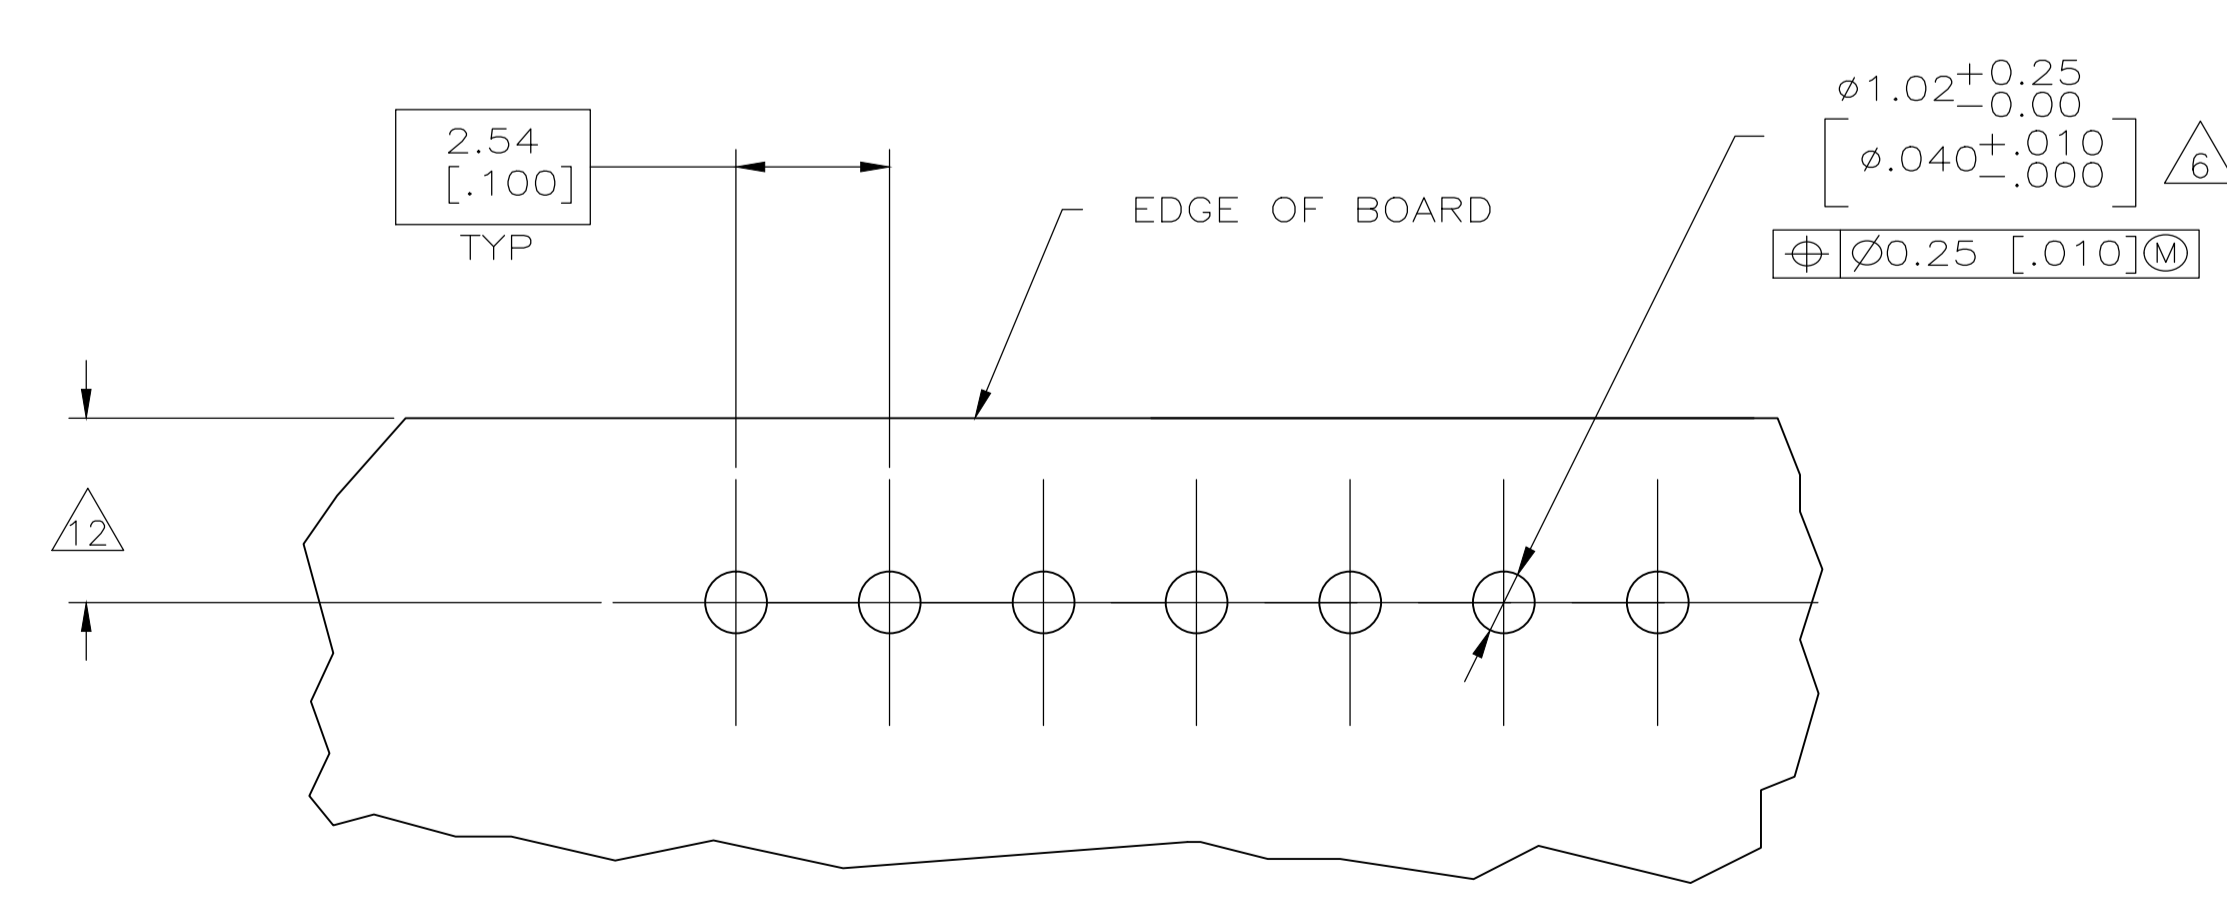

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.60 [.063] THICK P.C. BOARD

5	17.78 [.700]	7	1744265-1
POST NO. OMITTED	DIM (L)	NO.OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 14MAR2007	TE Connectivity
DIMENSIONS: mm [INCHES]		CHK D. ROSSI 14MAR2007	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D D. ROSSI 14MAR2007	NAME
0 PLC	±	PRODUCT SPEC	MTA-100 HEADER ASSEMBLY, FRICTION LOCK, 7 POSITION, OMITTED POST, .025 SQUARE STRAIGHT POST, .000015 GOLD PLATED
1 PLC	±	APPLICATION SPEC	SIZE
2 PLC	± 0.13 [.005]	WEIGHT	A1
3 PLC	±	CUSTOMER DRAWING	SCALE 8:1
4 PLC	±	RESTRICTED TO	SHEET 1 OF 1
ANGLES	*		REV B1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)