

Modification To A Standard Part

Modification Part Number

502A812 THRU 845 - G07

Modification Description (in words)

R TRIMMED

Dimensions:-

| | R |
|---------|--------|
| | +/-10% |
| | b |
| 502A812 | 33 |
| 502A823 | 40 |
| 502A834 | 50 |
| 502A845 | 50 |

All other Dimensions Conform To Standard Product .502A812 THRU 845. . .

Copy Of Standard Product S.C.D. Available On Request

Special Notes


When coating is added, entry diameters may be reduced by 2mm max.

**Copyright(!)
Urheberrechte**

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced, or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn J. Haydon Checked *jh* Issue 1 Date March 1987Conforms to ISO Recommendations
3rd Angle Projection
Not to scaleApproval
DesignMKTG
*R.W. Evans*a.c. *[Signature]*

Ordering Information

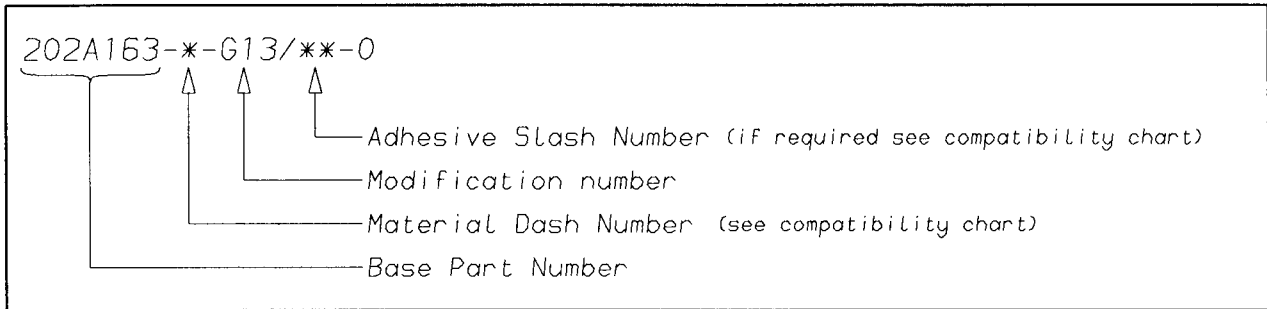

COMPATIBILITY CHART

| MATERIAL DASH NUMBER | MATERIAL DESCRIPTION | COATING SLASH NUMBER |
|----------------------|----------------------------|----------------------|
| -3 | POLYOLEFIN, SEMI-RIGID | /42 ,/86 |
| -4 | POLYOLEFIN, FLEXIBLE | /42 ,/86 |
| -25 | ELASTOMER, FLUID RESISTANT | /86,/225 |
| | | |
| | | |
| | | |

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)