


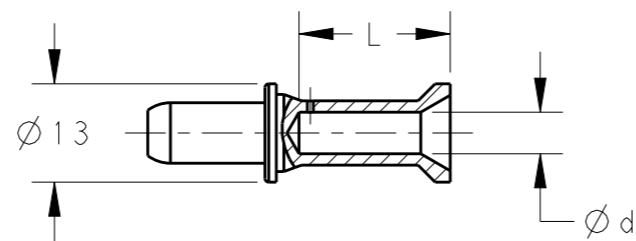


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25JUN2015	DW	CW

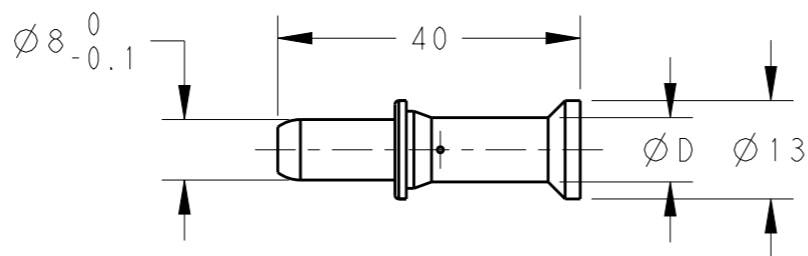


1)  $\phi d = 4.3, 5.5, 7.0$






NOTES:  
 1. TECHNICAL CHARACTERISTICS:  
 CONTACT MATERIAL: BRASS  
 SURFACE PLATING:  
 SILVER PLATING:  $\geq 2\mu m$   
 CONTACT RESISTANCE:  $\leq 0.5m\Omega$   
 WIRE RANGE: SEE TABLE  
 OPERATION TEMPERATURE:  $-40\sim+125^{\circ}C$

注释:  
 1. 技术参数:  
 公针材料: 黄铜  
 表面电镀:  
 镀银:  $\geq 2\mu m$   
 接触电阻:  $\leq 0.5m\Omega$   
 接线范围: 见表格  
 工作温度:  $-40\sim+125^{\circ}C$



2)  $\phi d = 8.2$

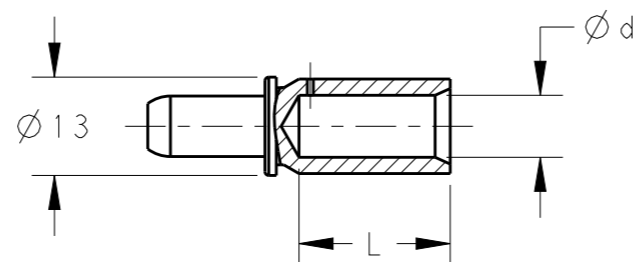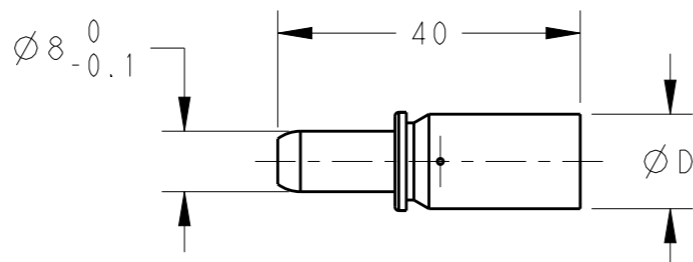

PART NUMBER	$\phi d$	$\phi D$	WIRE GAUGE	STRIPPING LENGTH
			MM <sup>2</sup>	L (mm)
T2050001010-000	4.3	5.6	10	20
T2050001016-000	5.5	8.5	16	
T2050001025-000	7.0	10.0	25	
T2050001035-000	8.2	12.5	35	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25JUN2015 David Wang	TE Connectivity		
DIMENSIONS: mm		CHK 25JUN2015 Chris Wang			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25JUN2015 Xiang Xu	NAME CNM PIN CONTACT		
0 PLC $\pm$ -		PRODUCT SPEC 108-137058	RESTRICTED TO		
1 PLC $\pm$ -		APPLICATION SPEC 114-137058	SIZE A3	CAGE CODE 00779	DRAWING NO T20500010XX000
2 PLC $\pm$ -		WEIGHT -	SCALE 1:1		
3 PLC $\pm$ -		Customer Drawing	SHEET 1 OF 1		
4 PLC $\pm$ -			REV A		
ANGLES $\pm$ -					
FINISH -					

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)