

4


3

2

1

CONVERSION CHART

INCH	MM
.002	0.05
.010	0.25
.020	0.51
.035	0.88
.051	1.30
.115	2.92
.185	4.70
.200	5.08
.406	10.31

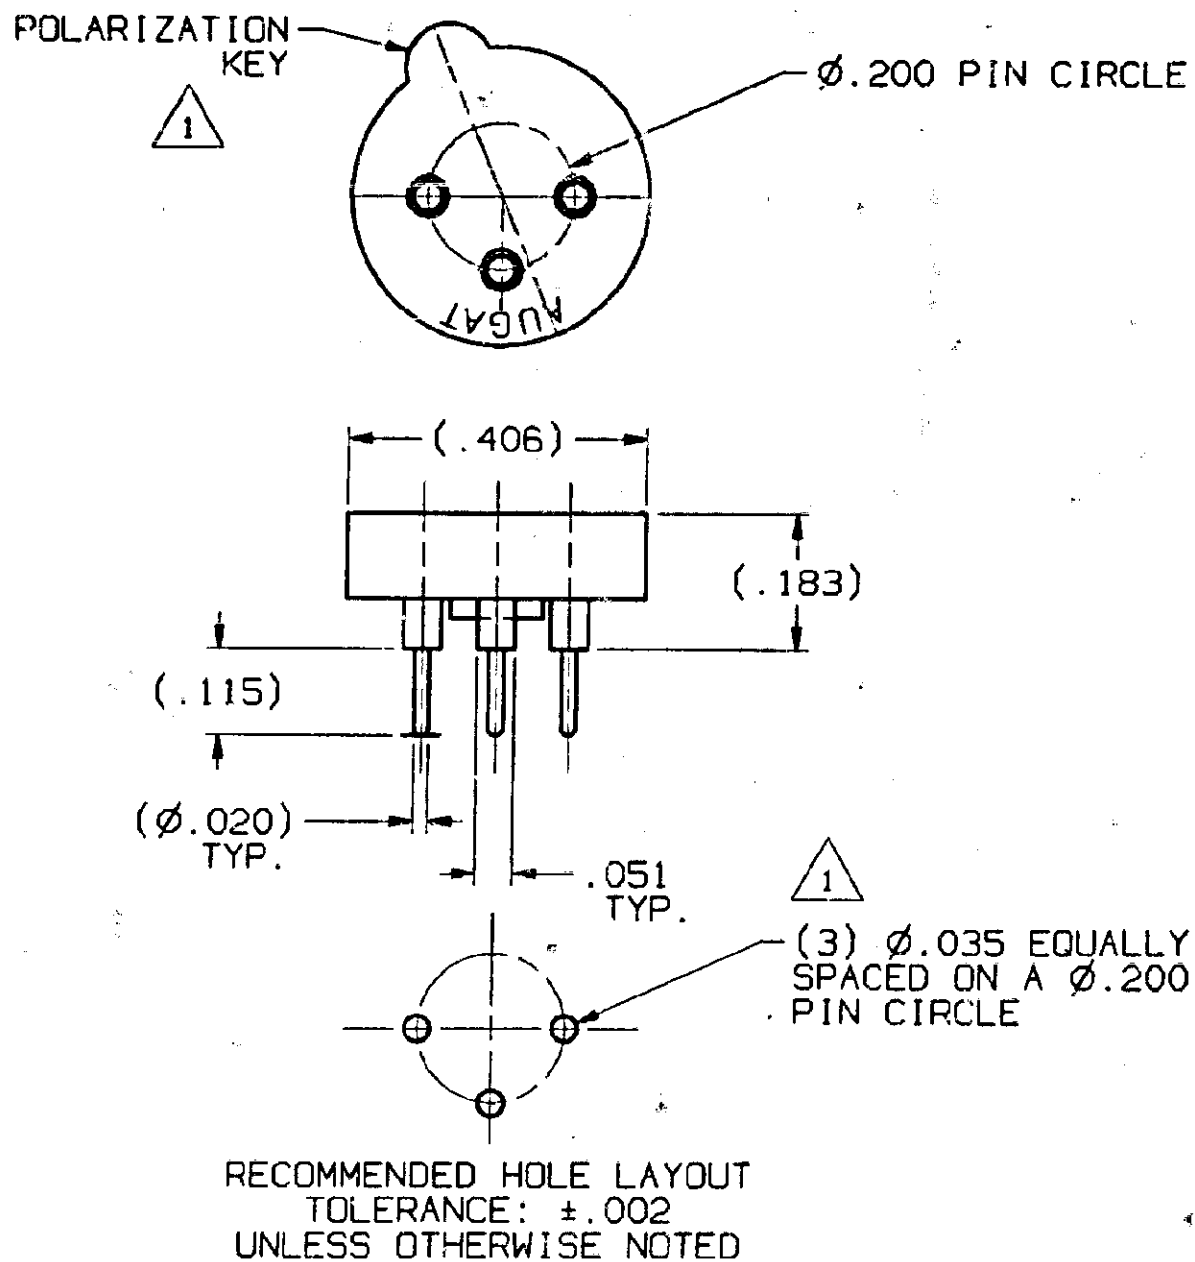

SPECIFICATIONS:

- △ 1
- MATERIALS:**
INSULATOR: POLYAMIDE (COLOR: RED)
SLEEVE: COPPER ALLOY, GOLD OVER NICKEL PLATE.
CONTACT: COPPER ALLOY, GOLD OVER NICKEL PLATE.
- ELECTRICAL:**
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
CONTACT RATING: 3 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 600 VOLTS.
- MECHANICAL:**
OPERATIONAL TEMPERATURE: -67°F TO +257°F
(-55°C TO +125°C)
WITHDRAWAL FORCE: 14.1g MIN.

NOTES:

- INTERPRET DRAWING PER ASME Y14.5M-1994.
- ASSEMBLY WILL ACCEPT Ø.016/.020 LEADS.

OUTLINE DRAWING
SPECIFICATIONS ARE SUBJECT TO CHANGES WITHOUT NOTICE

THIS IS A C.A.D. GENERATED DRAWING.
DO NOT MAKE MANUAL REVISIONS TO MASTER.



REV	0	1
REVISIONS	INITIAL RELEASE ESR # AG572 K.W. 6/9/95 APP'D: RJS 8/24/95	REVISED ECO# 23-97 L.S. 2-20-97 APP'D: [Signature]

<p>THIRD ANGLE PROJECTION</p>	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DO NOT SCALE PRINT		ORIGINAL DATE OF DRAWING: 8/9/95
	TOLERANCES (EXCEPT AS NOTED) ANGULAR = ±1° DECIMAL .XX = ±.005 DECIMAL .XXX = ±.010 DECIMAL .XXXX = ±.015	FILE NAME: 80592G1L MATERIAL: SEE SPECIFICATIONS	DIRECTORY: ASBY/8000ASSY
<p>AUGAT CONFIDENTIAL</p> <p>This document contains information which is the exclusive property of Augat Inc. Distribution, reproduction or use by others is not permitted without the expressed written consent of Augat Inc.</p>	SEE SPECIFICATIONS		CHECKED: [Blank] DATE: [Blank]
	FINISH: SEE SPECIFICATIONS	APPROVED: R.J.S. DATE: 8/24/95	CODE IDENT. NO. 91506 DWG. SIZE B
NEXT ASSY: [Blank]		TITLE: OUTLINE DRAWING SOCKET 3 PIN PRINTED CIRCUIT	

<p>AUGAT INC.</p> <p>452 JOHN DIETSCH BLVD. ATTLEBORO FALLS, MASS. 02763</p>	
<p>DWG. NO. 8059-261</p>	
<p>PRODUCT CODE: 022</p>	<p>REV. 1</p>

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)