



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M1	REVISED PER ECO-17-008114	12JUN2018	RS	DR

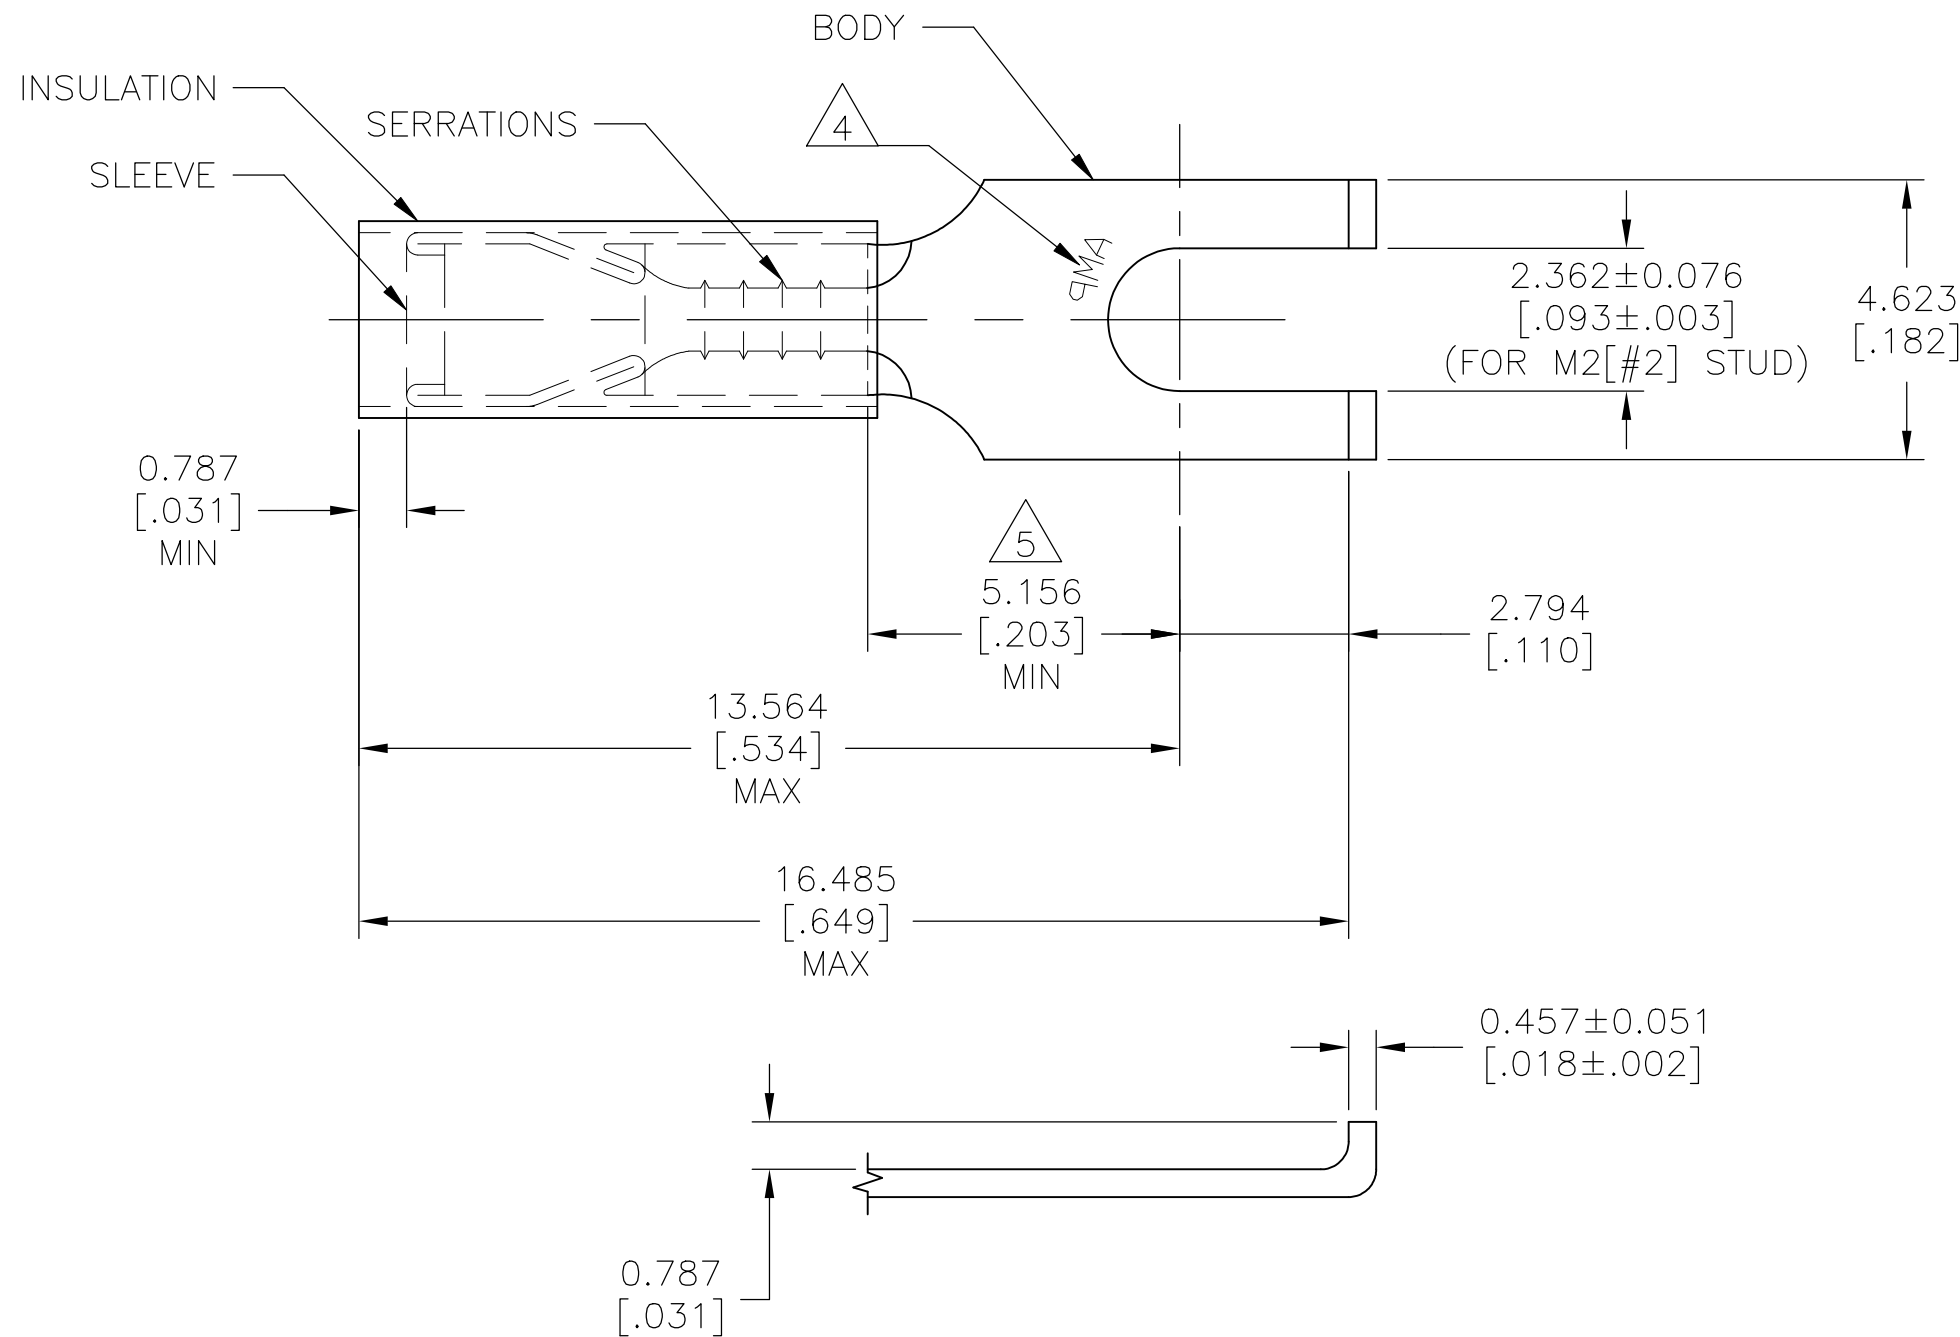

- 1 WIRE INSULATION DIA:  
1.270 TO 2.083 [.050 TO .082]
- 2 FINISH:  
BODY & SLEEVE: TIN PLATE PER ASTM B545  
0.0025400 [.000100]  
INSULATION: COLOR - YELLOW
- 3 MATERIAL:  
BODY & SLEEVE: COPPER PER ASTM B152  
INSULATION: NYLON
- 4 STAMP AMP APPROX AS SHOWN
- 5 APPLIES FROM EDGE OF METAL WIRE  
BARREL TO CENTER OF STUD

1000	LOOSE PIECE	324597
QUANTITY	DESCRIPTION	PART NO

AMP INCORPORATED  
 CUSTOMER SERVICE SYSTEMS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN RAVI S 12JUN2018

CHK ROHDE DANIEL 12JUN2018

APVD ROHDE DANIEL 12JUN2018



FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE, 0.10-0.41mm²[202-810] CIR MILS STRANDED

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± 0.127[.005]
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
3	2

NAME	114-2157
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	
CUSTOMER DRAWING	

NAME				TERMINAL, P.I.D.G., FLANGED SPADE WIRE SIZE: 26-22			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
A3	00779	C-324597	-				
SCALE N.T.S.			SHEET 1 OF 1	REV M1			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)