

SPECIFICATION CONTROL DRAWING

SCD


55/7312

Title TWO CONDUCTOR CABLE, SHIELDED, JACKETED,
OUTER SPACE, 600 VOLT

Date 2-1-19

Revision B

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

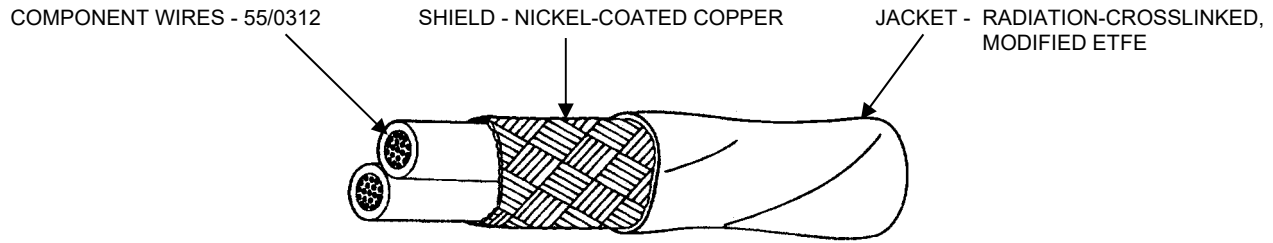

CABLE CONSTRUCTION DETAILS							
PART NUMBER ^{1/}	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/7312-30-*	30	38	.0040	.0050	.069	.072	4.37
55/7312-28-*	28	38	.0040	.0050	.075	.079	5.22
55/7312-26-*	26	38	.0040	.0050	.085	.089	6.78
55/7312-24-*	24	38	.0040	.0050	.095	.100	8.53
55/7312-22-*	22	38	.0040	.0050	.108	.114	11.21
55/7312-20-*	20	38	.0045	.0055	.130	.137	15.87
55/7312-18-*	18	38	.0045	.0055	.149	.157	21.72
55/7312-16-*	16	38	.0045	.0055	.165	.173	26.29
55/7312-14-*	14	38	.0050	.0060	.195	.205	37.53
55/7312-12-*	12	38	.0055	.0065	.235	.247	54.41
55/7312-10-*	10	38	.0060	.0070	.291	.306	82.83

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms) at sea level
 CROSSLINKED VERIFICATION: 300 ± 3°C for 1 hour
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 JACKET COLOR: White preferred
 JACKET ELONGATION: 50% (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms)
 Impulse Dielectric Test, 6.0 kV (peak)
 RADIATION RESISTANCE: 500 megarads
 SHIELD COVERAGE: 90% (minimum)

VACUUM STABILITY:
 Total Mass Loss (TML), 1.00% (maximum)
 Volatile Condensable Material (VCM), 0.10% (maximum)
 VOLTAGE WITHSTAND (Post Environmental):
 1500 volts (rms), 60 Hz, 1 minute

^{1/} PART NUMBER:
 The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 20, blue and white component wires; white jacket: 55/7312-20-6/9-9

NOTE: Nominal values are for information only. Nominal values are not requirements.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. TE Connectivity also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

^{1/} COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Raychem, TE Connectivity, and TE connectivity (logo) are trademarks.

DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



Raychem Wire & Cable
 501 Oakside Avenue
 Redwood City, CA 94063-3800
 Phone: 1-800-522-6752
 Fax: 1-650-361-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)