
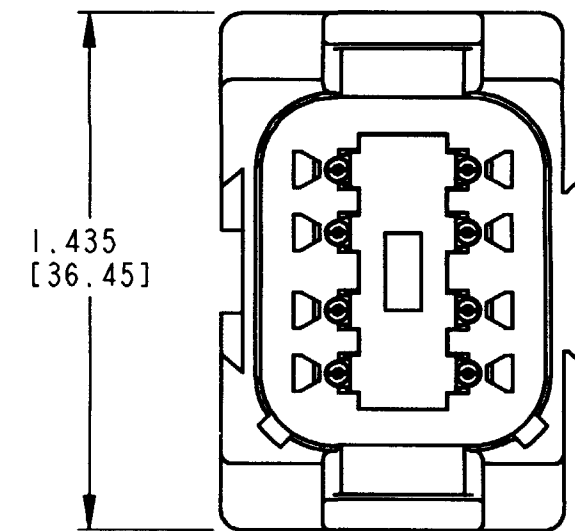
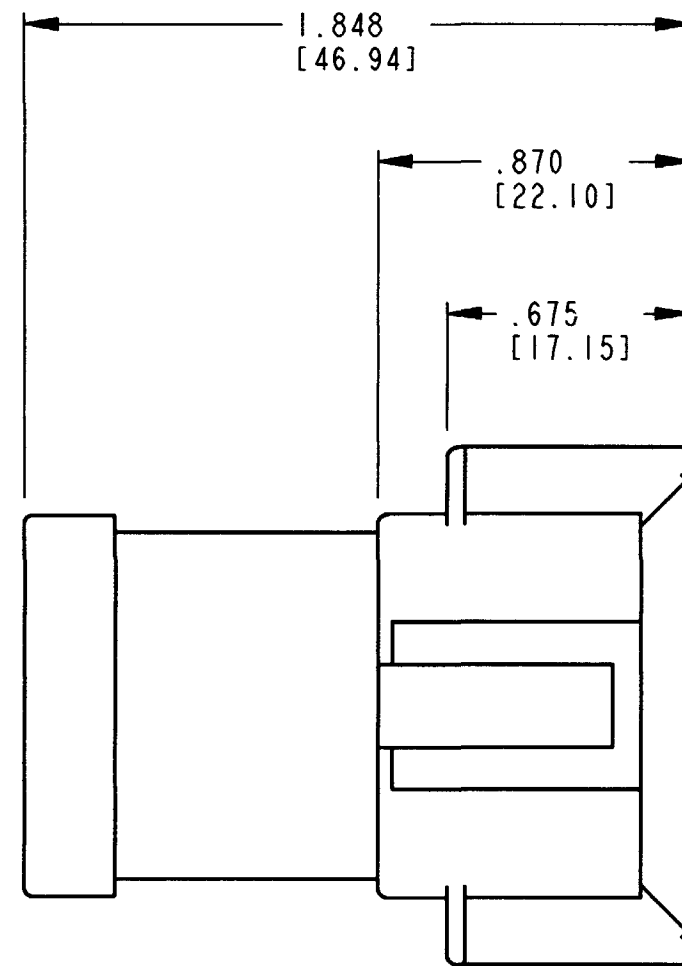


3D VIEW

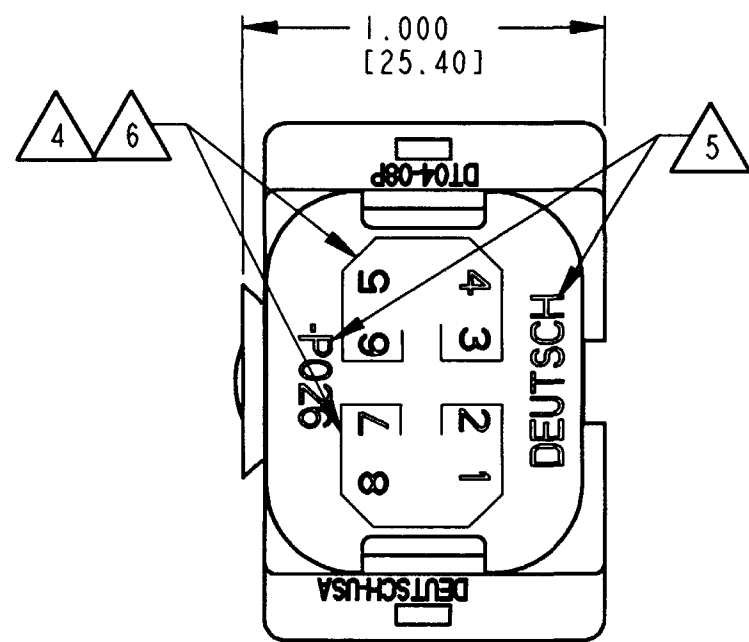

REV		REVISIONS		
SYM	DESCRIPTION	DATE	APPROVED	
A	DT04-08PB-P026			
NC	NEW RELEASE PER E.O. P16142	8/17/99	RDR	
A	REVISION PER E.O. P16286	9/2/99		

- 5. ORIENTATION OF "DEUTSCH" AND "-P026" TO BE OPTIONAL.
- 4. BORDER SIGNIFIES THAT PINS 1,2,7,8 AND PINS 3,4,5,6 ARE BUSSED TOGETHER WITH 4 PIN BUSBARS.
- 3. THIS DT04-08PB-P026 MATES WITH DT06-08SB-**** (**** = ALL MODIFICATIONS). CONSULT FACTORY FOR MODIFICATIONS.
- 2. DIMENSIONS ARE ±.025[0.63] UNLESS OTHERWISE SPECIFIED.
- 1. DIMENSIONS ARE IN INCHES [MILLIMETERS].

NOTES:

6. THE 4 PIN BUSBAR HAS A MAXIMUM CURRENT RATING OF 26 AMPS.

SIGNATURE & DATE	
DR	M. GONZALEZ 8/5/99
CHK	9/2/99
PE	9/2/99
APPD	9/2/99
SCALE	NONE WT

DT 8 WAY RECEPTACLE
KEY ARRANGEMENT -B-
(2) 4 PIN BUSBARS-NICKEL PLATED
COLOR: BLACK

ENVELOPE

CP	MATL. CODE
The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
B	DT04-08PB-P026
DWG SIZE	CODE 1139 SHEET OF

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)