
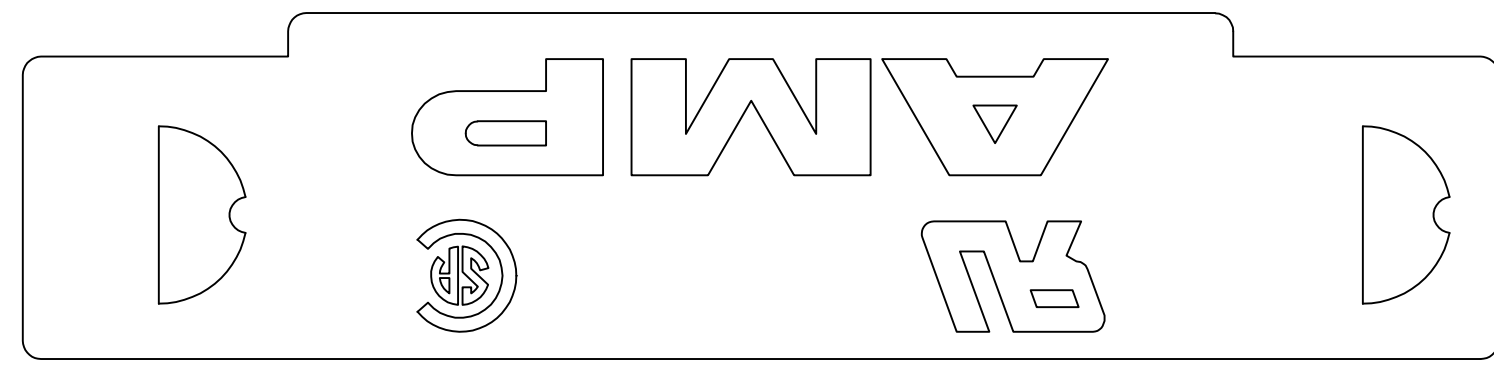
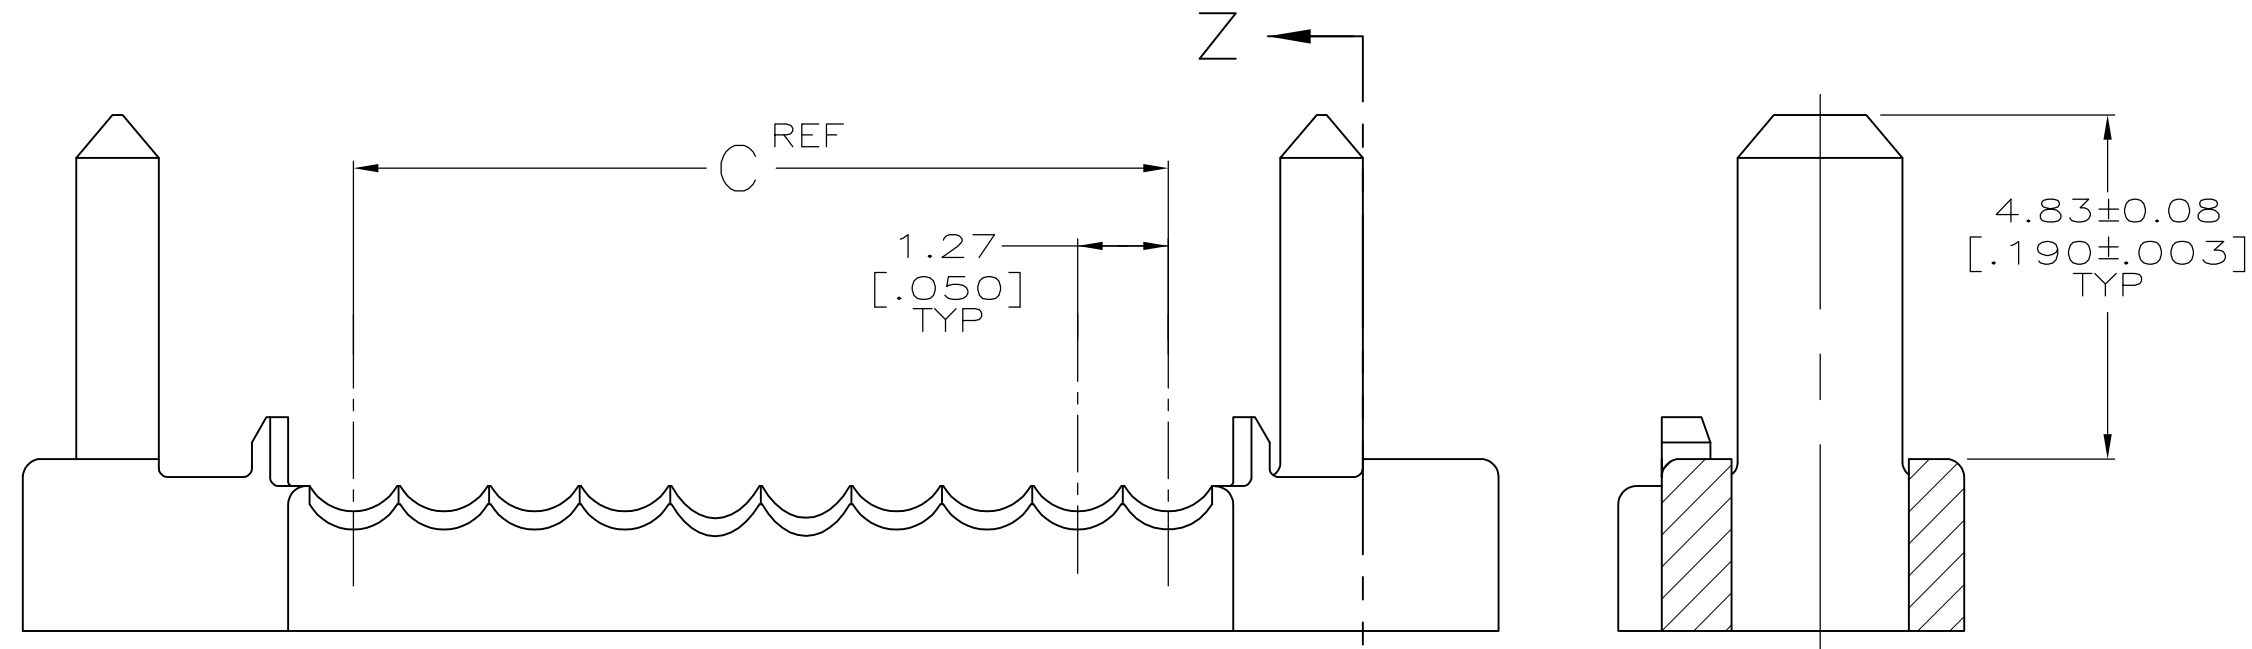


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|---------------------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | OWN | APVD |
| BD | 95 | B | REVISED PER ECO-14-018700 | 17DEC2014 | AP SB |

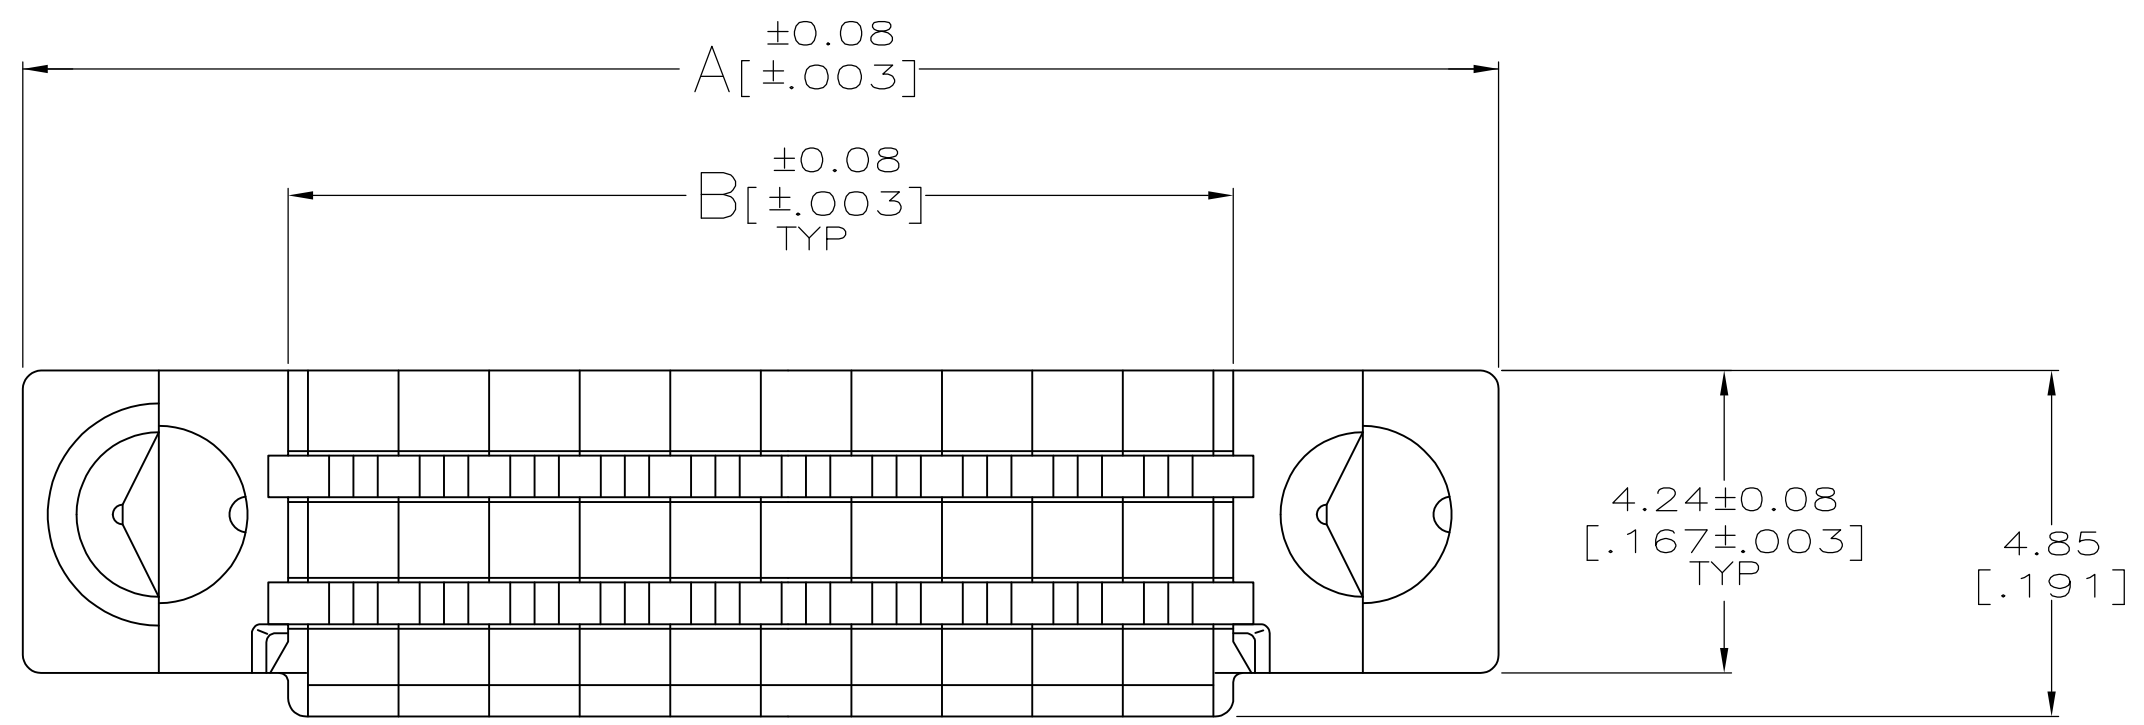

| | | | | | |
|----------|------------------|------------------|------------------|------------|-------------|
| | 21.59 [.850] | 23.42 [.922] | 30.86 [1.215] | 36 | 1-749108-1 |
| | 15.24 [.600] | 17.07 [.672] | 24.51 [.965] | 26 | 1-749108-0 |
| OBSOLETE | 74.93 [2.950] | 76.76 [3.022] | 84.20 [3.315] | 120 | 749108-9 |
| | 62.23 [2.450] | 64.06 [2.522] | 71.50 [2.815] | 100 | 749108-8 |
| | 49.53 [1.950] | 51.36 [2.022] | 58.80 [2.315] | 80 | 749108-7 |
| | 41.91 [1.650] | 43.74 [1.722] | 51.18 [2.015] | 68 | 749108-6 |
| | 36.83 [1.450] | 38.66 [1.522] | 46.10 [1.815] | 60 | 749108-5 |
| | 30.48 [1.200] | 32.31 [1.272] | 39.75 [1.565] | 50 | 749108-4 |
| | 24.13 [.950] | 25.96 [1.022] | 33.40 [1.315] | 40 | 749108-3 |
| | 16.51 [.650] | 18.34 [.722] | 25.78 [1.015] | 28 | 749108-2 |
| | 11.43 [.450] | 13.26 [.522] | 20.70 [.815] | 20 | 749108-1 |
| | C | B | A | NO OF POSN | PART NUMBER |

- 1 POLYESTER, UL 94V-0 RATED, BLACK.
- 2 RECOMMENED WIRE: 28 OR 30 AWG SOLID OR 7 STRAIN, 0.74- 0.91 [.029- .036] INSULATION DIAMETER. WIRE MUST BE APPROVED BY TE INC.
- 3 TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | |
|--------------------------------|--|
| DWN C.OBERMAN 10/19/93 | TE Connectivity |
| CHK R.STONE 10-19-93 | |
| APVD R.MIKLINSKI 12-6-93 | NAME TERMINATING COVER, AMPLIMITE™ .050 SERIES |
| PRODUCT SPEC 108-1228 | SIZE A2 |
| APPLICATION SPEC 114-40029 | CAGE CODE 00779 |
| MATERIAL FINISH | DRAWING NO G-749108 |
| WEIGHT | RESTRICTED TO |
| CUSTOMER DRAWING | SCALE 10:1 SHEET 1 of 1 REV B |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)