

3

2

1


NUMBER
C-179610

179610-1 : 本 ☒

179610-1 : AS SHOWN



METRIC

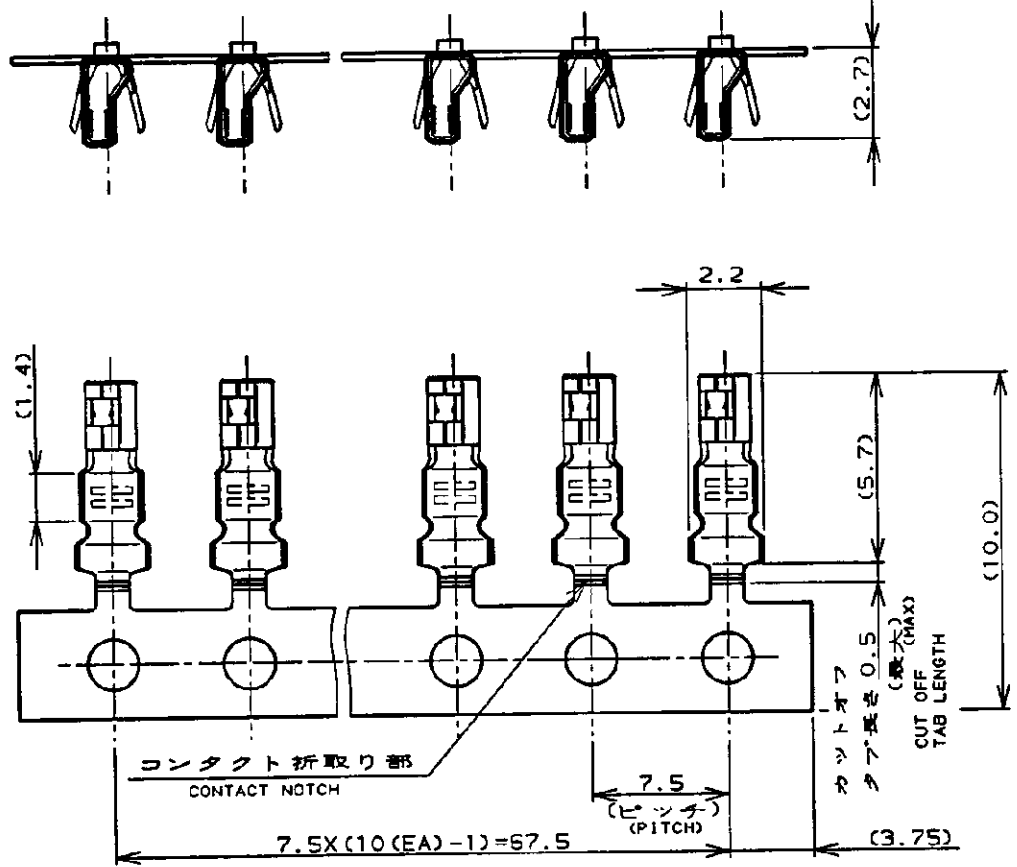

- 注,
- 1 材料 錫めっき済磷青銅(板厚0.2)
 - 2 運用製品規格, 108-5408
 - 3 取付運用規格, 114-5179
 - 4 連続状端子型番, 179609-1(折取り部なし)

- NOTES,
- 1 MATERIAL PRE-TIN PHOS.BRO (THK 0.2)
 - 2 PRODUCT SPEC. ; 108-5408
 - 3 APPLICATION SPEC. ; 114-5179
 - 4 STRIP TERMINAL , 179609-1 (W/O NOTCH)

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

Copyright © 19__
AMP (Japan) .LTD.
ALL RIGHTS RESERVED.

AMP
AMP (JAPAN) , LTD.
Tokyo, Japan

GENERAL TOLERANCE	WIRE RANGE	INSULATION DIA.
0mm ≤ 10 : ±0.2 10mm ≤ 30 : ±0.25 30mm ≤ 100 : ±0.3 ANGLES : ±3°	0.05 -0.12 mm ² (AWG 30-25)	0.65-1.35mmφ
MATERIAL	SEE NOTE 1	FINISH
注 参照	注 参照	注 参照

SCALE	SIZE	LOC	NUMBER	REV.	SHEET
—#	A	J	C-179610	0	1 OF 1
NAME CRIMP TYPE II REC. CONTACT (L/P) 圧着タイプIIリセコンタクト (レコラ状) (AMP CTコネクタ 2mmピッチ) (AMP CT CONN.2mm PITCH)					
DR. T. Saito 1/23/96	DE. T. Saito 1/23/96				
CHK. S. Kubouchi 1/23/96	APP. S. Kubouchi 1/23/96				

AMP-J
REV. 10/83

CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)