
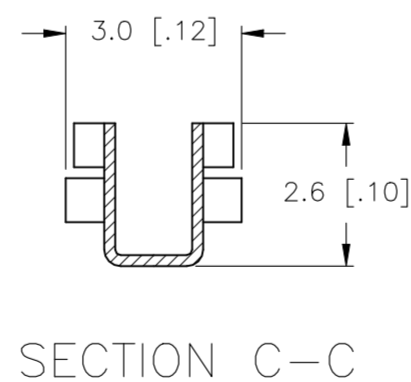
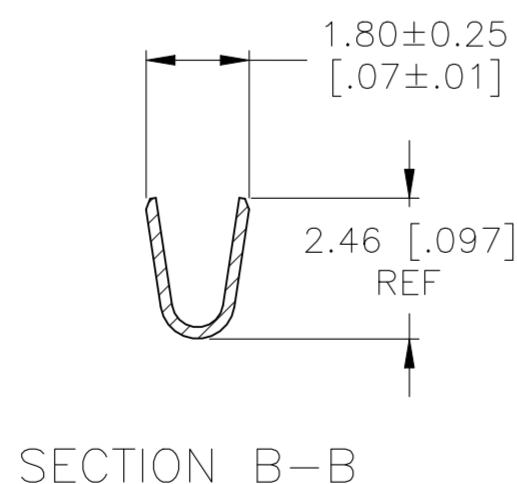
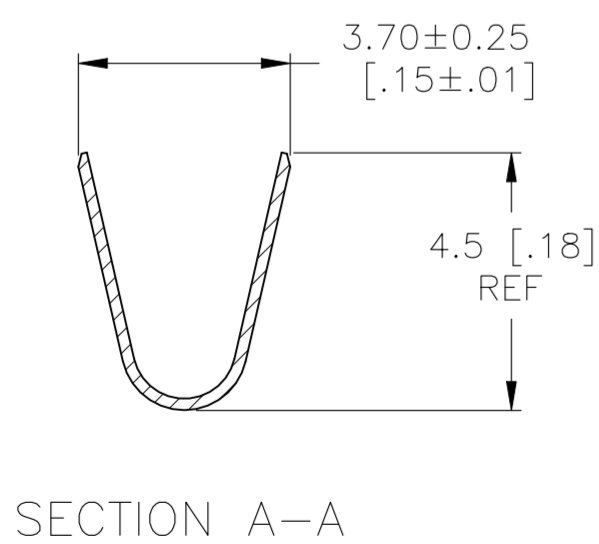
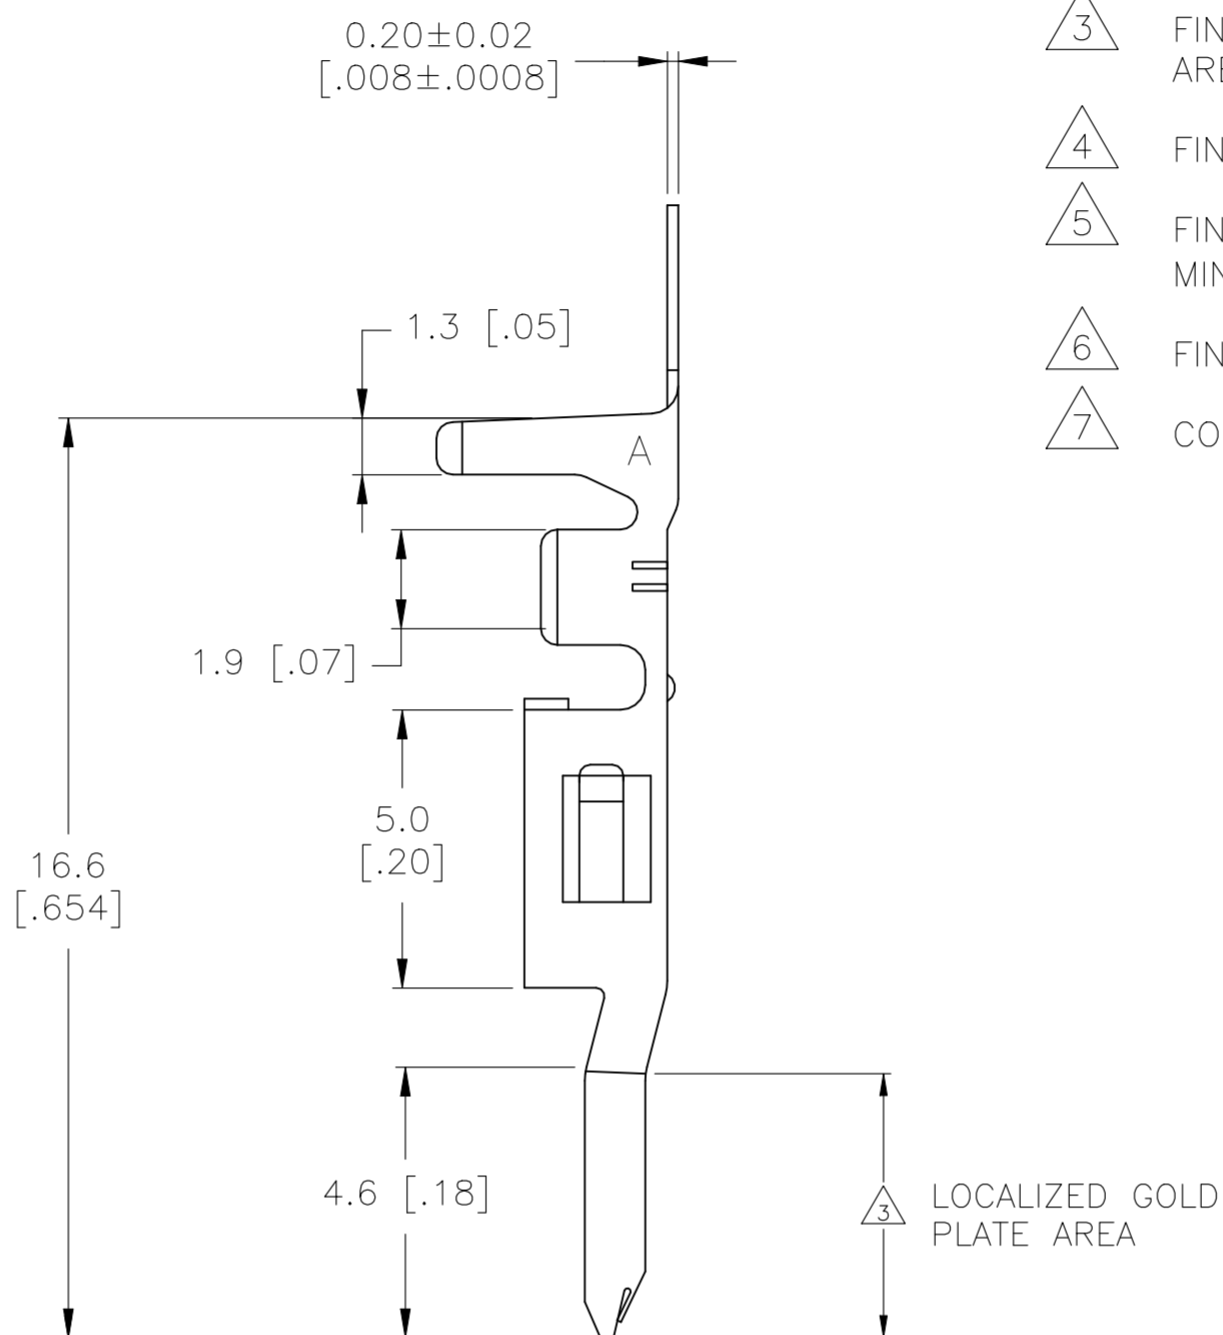


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CM	00	H6		REVISED AS PER ECR-21-105915	07JUN2021	WH DC	

- 1 WIRE RANGE: 0.3-0.82mm<sup>2</sup> (22-18 AWG)
- 2 INSULATION RANGE: 1.50 - 3.10 DIA.
- 3 FINISH: 0.76μm MINIMUM GOLD IN LOCALIZED GOLD PLATE AREA OVER 1.27μm MINIMUM NICKEL.
- 4 FINISH: 2.54μm MINIMUM PRE-TIN IN LOCALIZED TIN PLATE AREA.
- 5 FINISH: 2.54μm MINIMUM PRE-TIN OVER 1.27μm MIN NICKEL OVERALL(BEFORE AND AFTER STAMPING)
- 6 FINISH: 2.54μm MINIMUM TIN OVER 1.27μm MIN NICKEL OVERALL
- 7 CONTACTS COATED WITH ANTI-FRETTING LUBRICANT

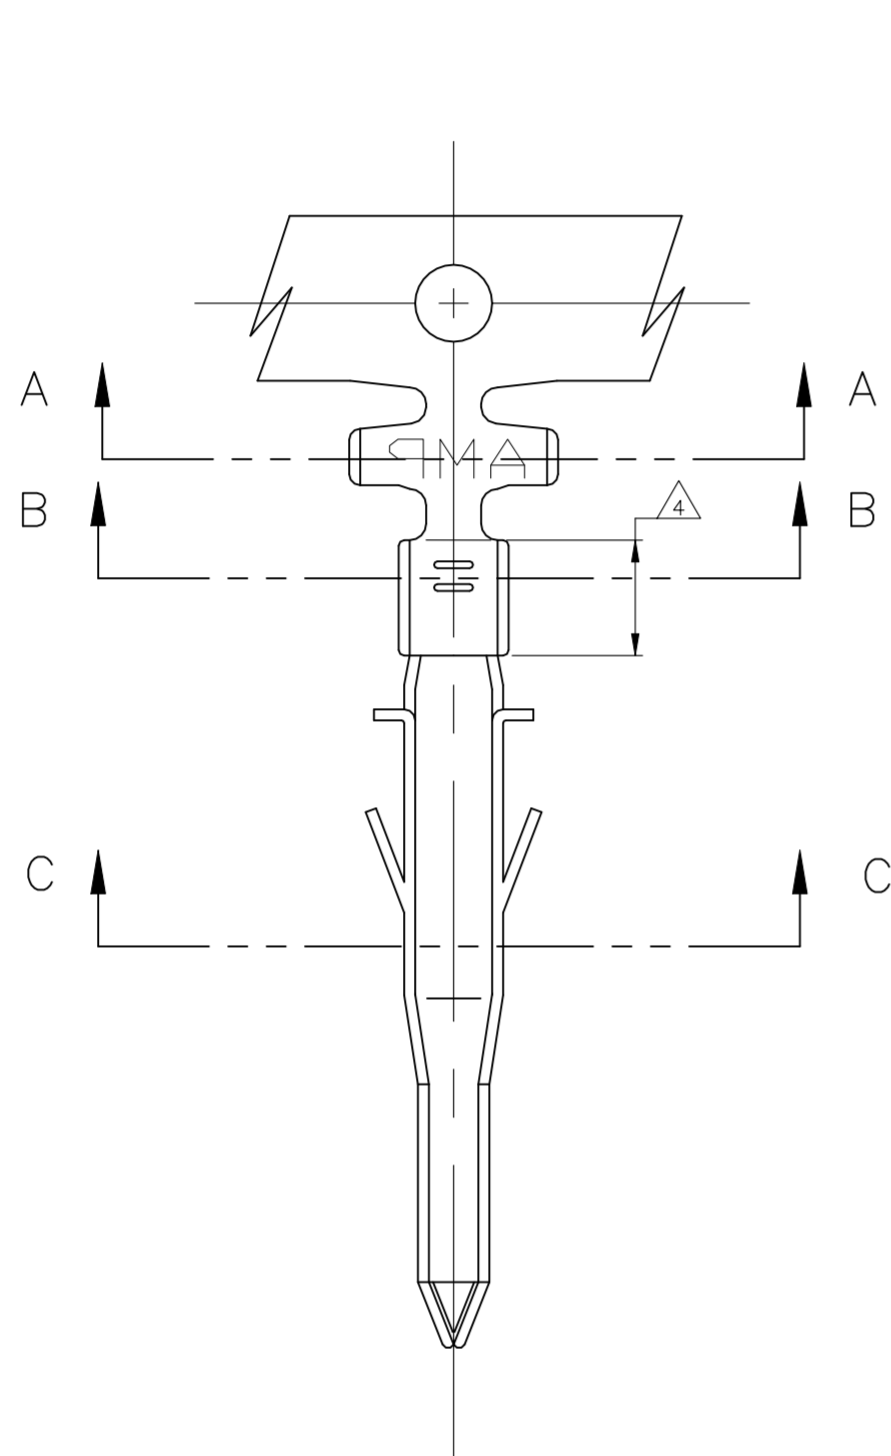

TIN	6 7	BRASS	794955-5
GOLD	3 4	PHOS. BRZ.	794955-4
PRE-TIN	5	PHOS. BRZ.	794955-3
GOLD	3 4	BRASS	794955-2
PRE-TIN	5	BRASS	794955-1
FINISH		MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HAMM 07-SEP-2001	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. COLEY 07-SEP-2001		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY 07-SEP-2001	NAME	
0 PLC ± 1 PLC ± 0.25 [.010] 2 PLC ± 0.15 [.006] 3 PLC ± - 4 PLC ± ANGLES ±		PRODUCT SPEC 108-2112	TERMINAL PIN VAL-U-LOK(TM)	
MATERIAL		APPLICATION SPEC 114-13172	SIZE A2	CAGE CODE 00779
FINISH		WEIGHT	DRAWING NO C=794955	RESTRICTED TO -
CUSTOMER DRAWING			SCALE N/A	SHEET 1 OF 1
			REV H6	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)