



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	C	REVISED PER ECO-14-006554	09MAY2014	NK MM

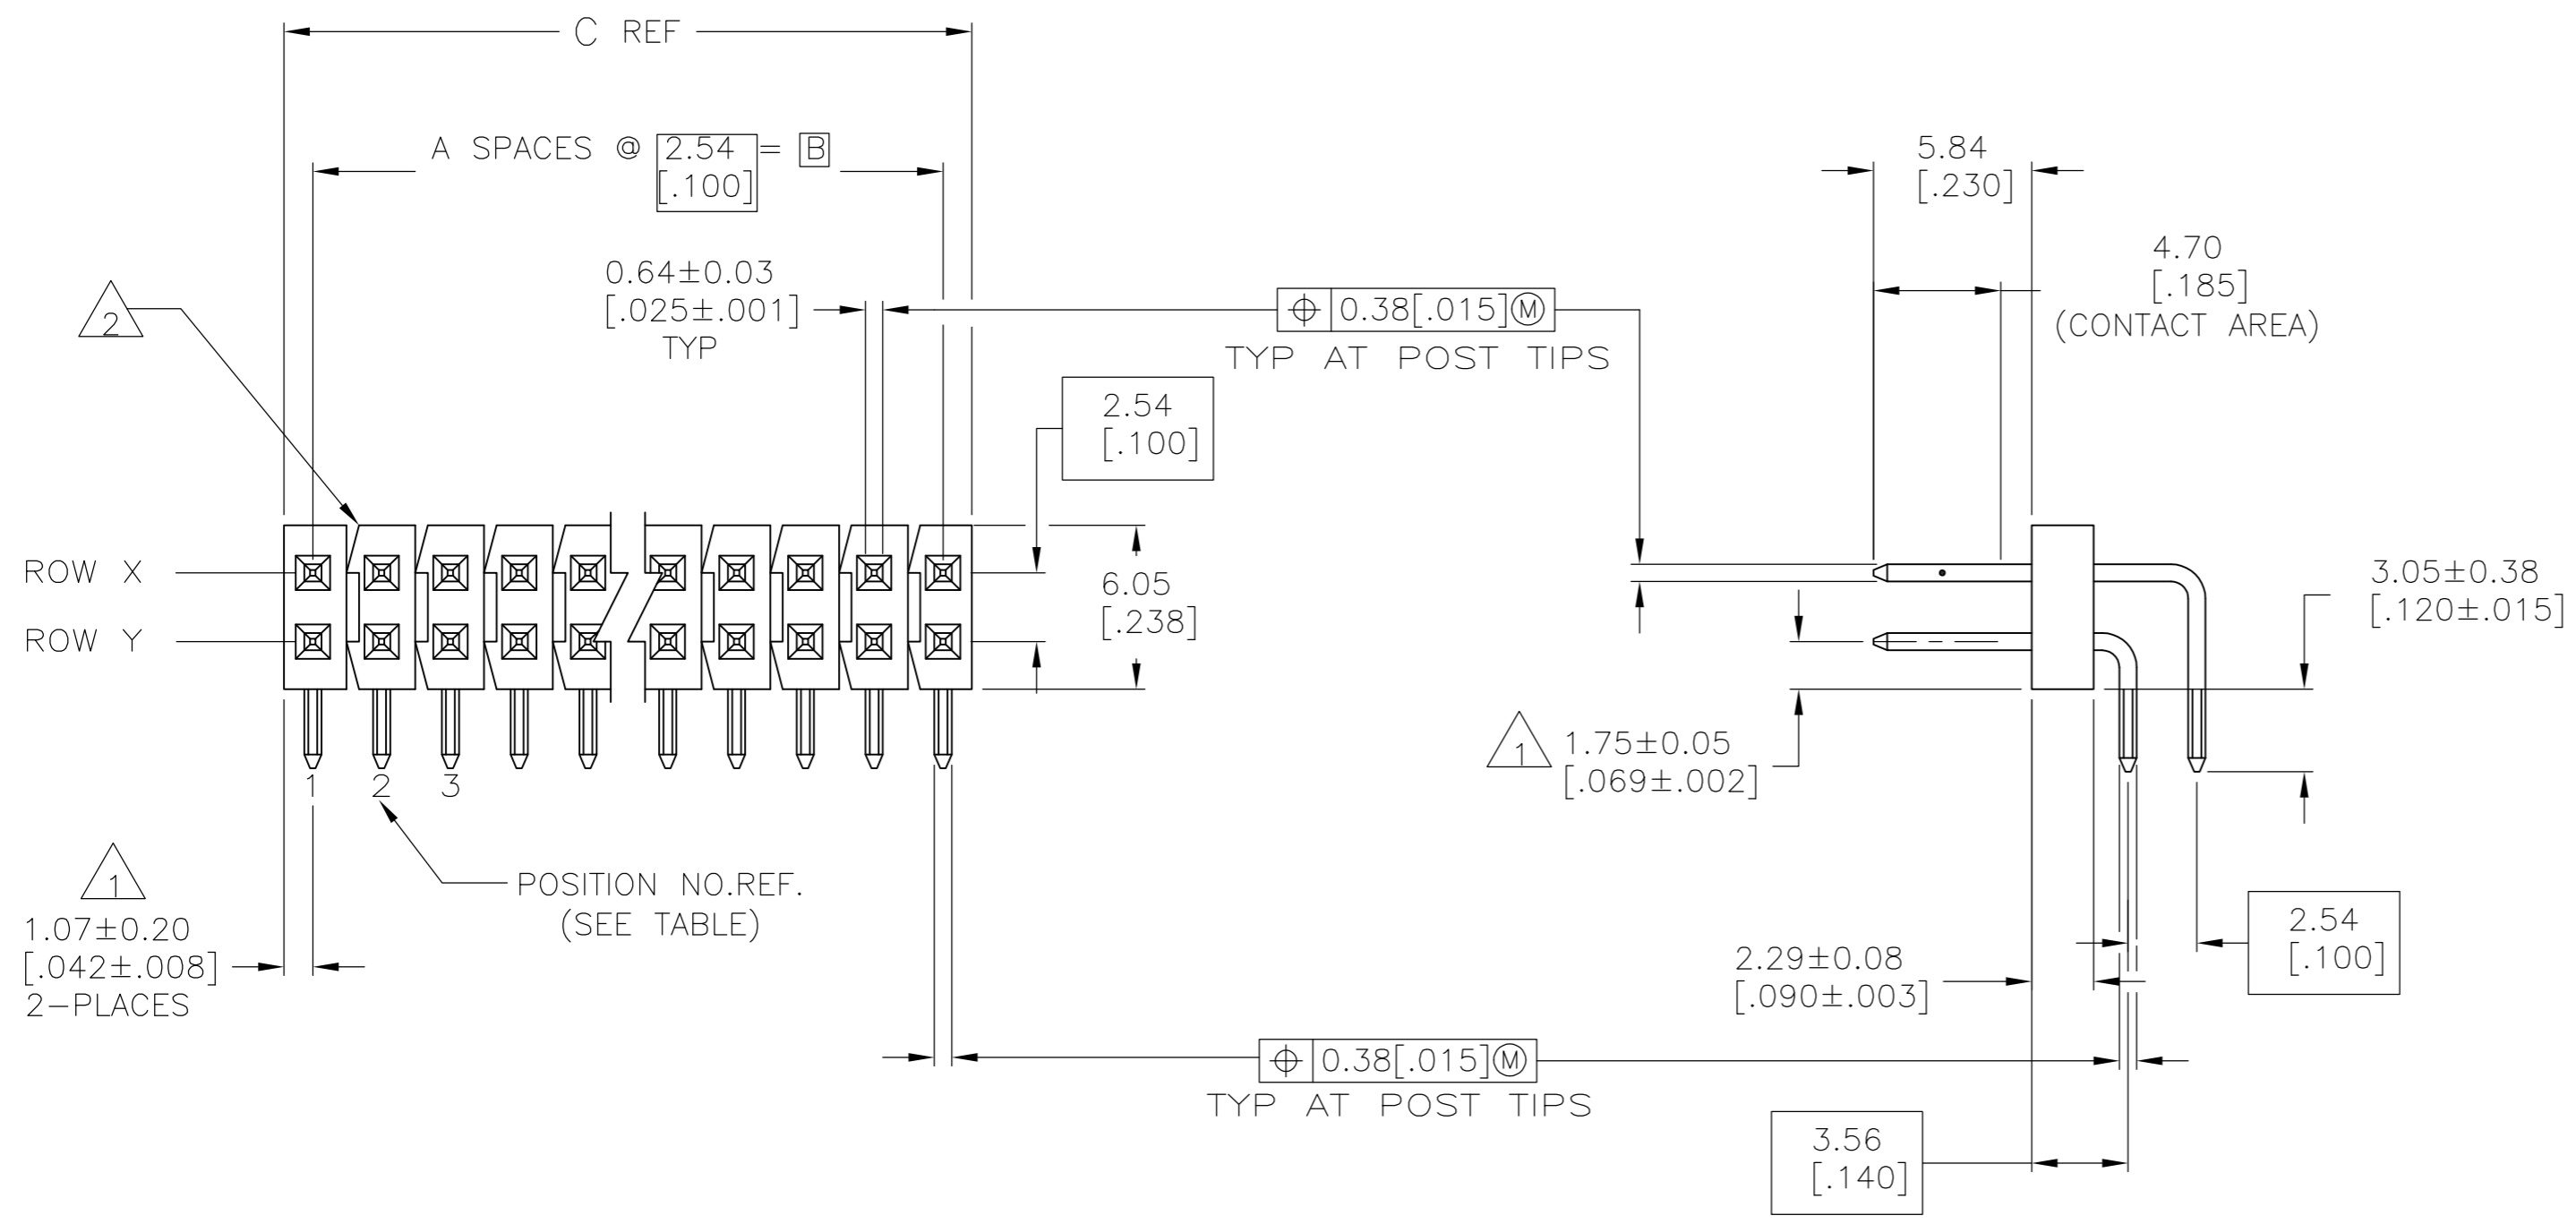

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 GLASS FILLED THERMOPLASTIC (THAT WILL WITHSTAND IR REFLOW PROCESSING) COLOR: BLACK.
- 4 PARTS PACKAGED IN TUBES.
- 5 0.000076[.0000030] MIN GOLD OVER 0.00068[.000027] Pd/Ni ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ALL OVER 0.00127 [.000050] NICKEL.

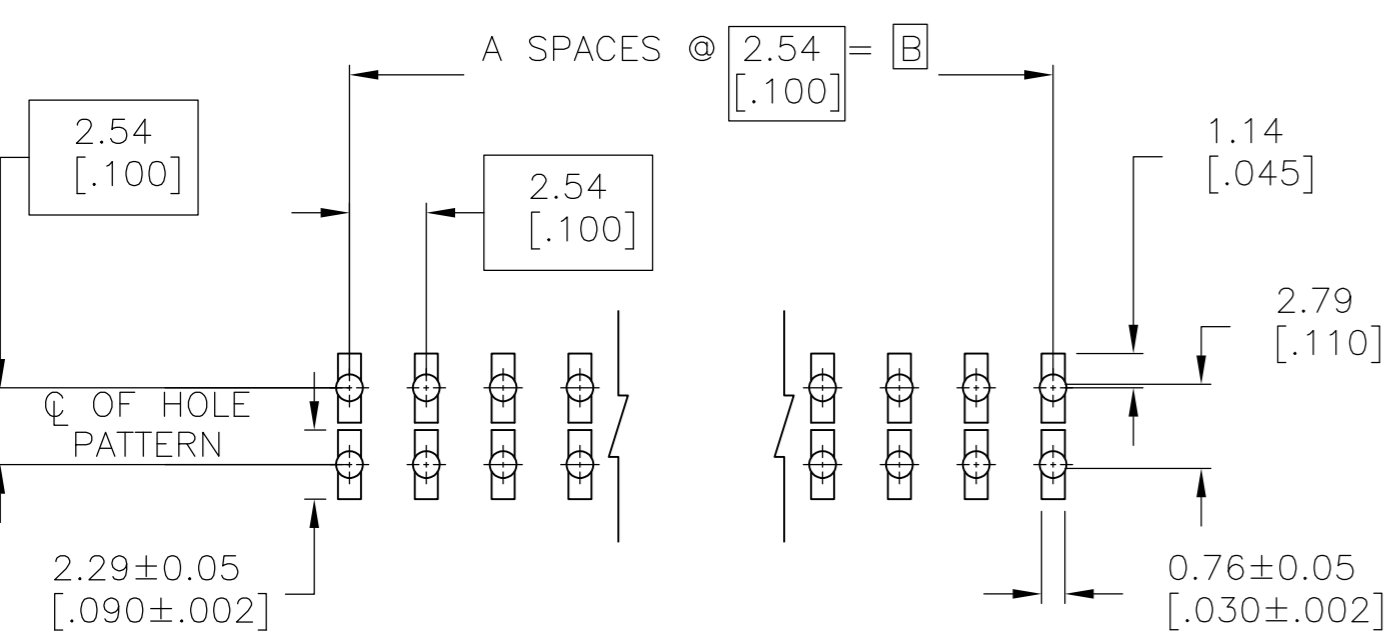

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR 1.60 [.063] THICK PC BOARD AND 0.305 [.0120] STENCIL THICK.

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
5	101.19 [3.984]	99.06 [3.900]	39	80	8-1977958-0
5	2.13 [.084]	-	0	2	1977958-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 20SEP2013		
DIMENSIONS: mm [INCHES]		CHK MIKE MILLER 20SEP2013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD MIKE MILLER 20SEP2013	NAME	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	HEADER ASSEMBLY, MOD II, BREAKAWAY, RIGHT ANGLE, DOUBLE ROW, HIGH TEMPERATURE, .100 X.100 C/L, W/.025 SQUARE POSTS	
2 PLC ± 0.51[.02]	3 PLC ± 0.127[.005]	APPLICATION SPEC	SIZE	CAGE CODE
4 PLC ± 0.0127[.0005]	ANGLES ± -	FINISH	A2	00779
MATERIAL	SEE TABLE	WEIGHT	SCALE	SHEET
3			4:1	1 of 1
CUSTOMER DRAWING			REV	C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)