


REV. A
DCO 144519

COIL: @ 25°C	
RESISTANCE	44 OHMS ±10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.4 VDC
MUST RELEASE	1.45 VDC MAX, 0.26 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 Hz TO 3000 Hz @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

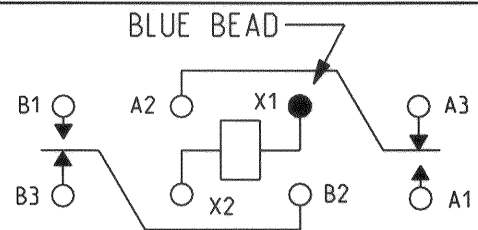

TERMINAL VIEW

CONTACT RATING:
LOW LEVEL TO 2A 28VDC RES..
100,000 OPS

DR. B.D. 11SEP2008

CK. *[Signature]*

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL
CUST. NO. M39016/13-073P REV.

TE NUMBER
2-1617073-1

CII PART NUMBER
3SBC2018A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)