

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL RELEASE	15APR2015	DL	CW
AI		ECR-15-009224	23JUN2015	DL	CW
B		ECR-15-018481	22FEB2016	DL	CW
C		ECR-21-111798	09SEP2021	WQR	CW

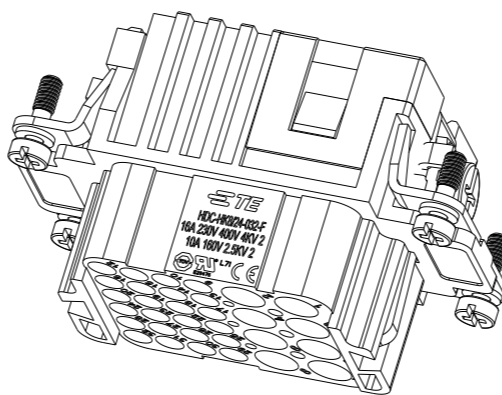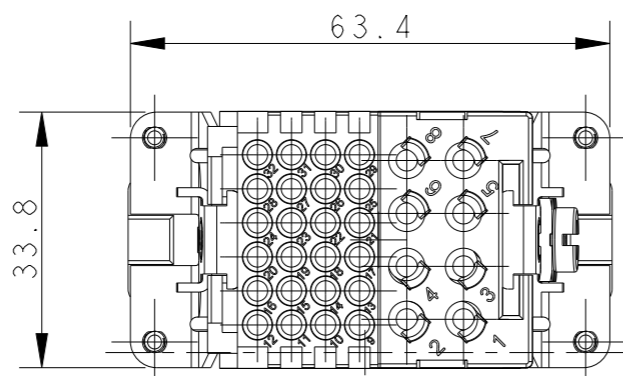


NOTES:

- TECHNICAL CHARACTERISTICS:  
 INSULATION MATERIAL: PC  
 RATED VOLTAGE: POWER: CONDUCTOR - GROUND: 230 V  
 CONDUCTOR - CONDUCTOR: 400 V  
 SIGNAL: 160 V  
 RATED CURRENT: POWER: 16 A; SIGNAL: 10 A  
 INSULATION RESISTANCE: >=400MΩ  
 RATED IMPULSE VOLTAGE: POWER: 4 KV; SIGNAL: 2.5 KV  
 POLLUTION DEGREE: 2  
 FLAMMABILITY: UL94V-0  
 MATING CYCLES: 500  
 OPERATION TEMPERATURE: -40-+125°C  
 WIRE RANGE: POWER: 0.14-4.0 mm<sup>2</sup> (26-12 AWG)  
 SIGNAL: 0.14-2.5 mm<sup>2</sup> (26-14 AWG)  
 CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.  
 (ORDER No. REFER TO DRAWING: 16A: T20300X20XX000;  
 10A: T20200X20XX000)

M5 THREAD  
RECOMMENDED TIGHTENING TORQUE 2.0Nm

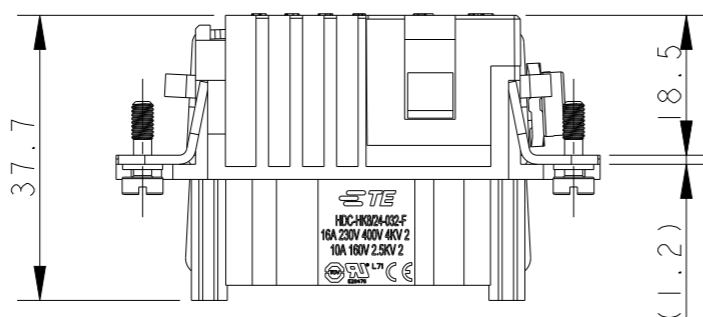


4 X M3 THREAD  
RECOMMENDED TIGHTENING TORQUE 0.5Nm

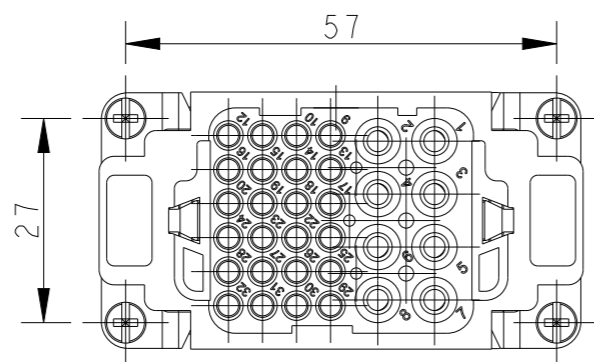

注释:

- 技术参数:  
 绝缘材料: PC  
 额定电压: 电源: 导体-地: 230 V; 导体-导体: 400 V; 信号: 160 V  
 额定电流: 电源: 16 A; 信号: 10 A  
 绝缘电阻: >=400MΩ  
 额定脉冲电压: 电源: 4 KV; 信号: 2.5 KV  
 污染等级: 2  
 阻燃等级: UL94V-0  
 插拔次数: 500次  
 工作温度: -40-+125°C  
 接线范围: 电源: 0.14-4.0 mm<sup>2</sup> (26-12 AWG);  
 信号: 0.14-2.5 mm<sup>2</sup> (26-14 AWG)  
 接线类型: 冷压接
- 端子需要单独订购.  
 (订货号参考图面: 16A: T20300X20XX000; 10A: T20200X20XX000)

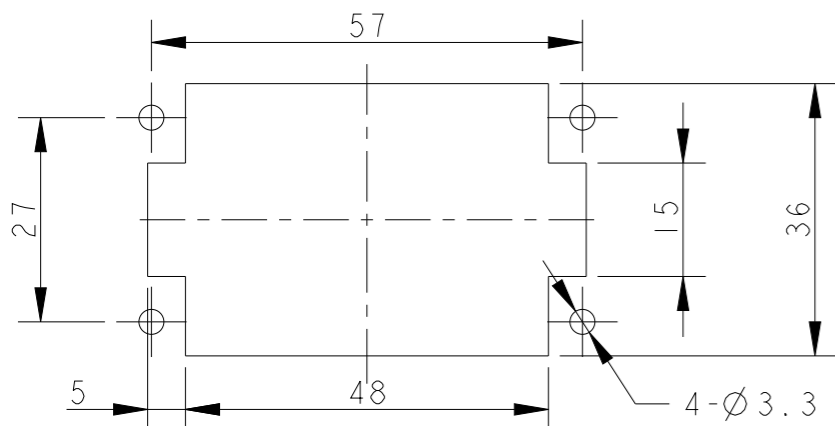

PANEL CUT OUT FOR INSERTS FOR USING WITHOUT HOODS/HOUSINGS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±-
1 PLC	±-
2 PLC	±-
3 PLC	±-
4 PLC	±-
ANGLES	±-
MATERIAL	FINISH
-	-
-	-

DWN	DAVID LI	15APR2015
CHK	CHRIS WANG	15APR2015
APVD	XU XIANG	15APR2015
PRODUCT SPEC	108-137131	
APPLICATION SPEC	114-137131	
WEIGHT	-	
CUSTOMER DRAWING		

T2100322201-000	HK8/24-032-F HK8/24-032 母插
PART NUMBER 料号	PART DESCRIPTION 描述



NAME			
HDC-HK8/24-032-F			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	©-T2100322201000	
SCALE		SHEET	REV
1:1		1 OF 1	C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)