


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
015	REVISED	9/26/94	M.A.

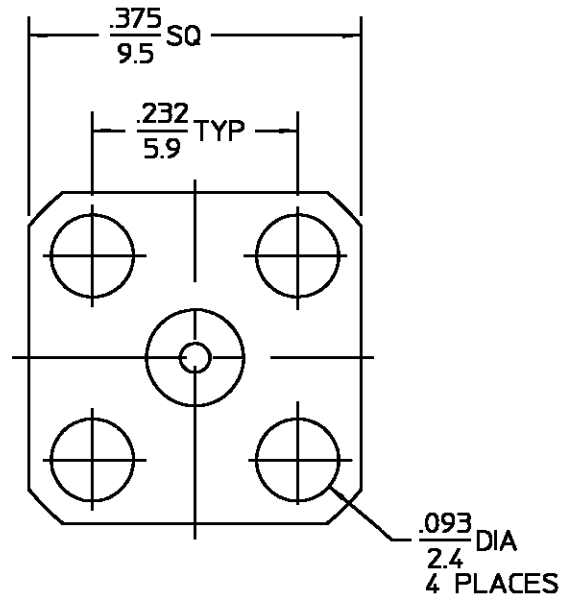

.XXX = in
XX.X = mm

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	MATERIAL	FINISH
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions <u>MIL-STD-348A, Fig. 319.2</u>	Temperature Rating <u>-65°C To +125°C</u>	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATED PER QQ-P-35	
Frequency Range (GHz) <u>DC to 18</u>	Mating Characteristics:	Vibration <u>MIL-STD-202,</u> Method 204, Cond. D	TFE FLUOROCARBON PER ASTM-D-1457	N/A	
Voltage Rating (VRMS MIN) <u>250 @ Sea Level</u>	Insertion (MAX Lbs) <u>3.0</u>	Shock <u>MIL-STD-202,</u> Method 213, Cond. I	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	
VSWR <u>1.05 +.006 f(GHz)</u>	Withdrawal (MIN Oz) <u>1.0</u>	Thermal shock <u>MIL-STD-202</u> Method 107, Cond. B, except High Temp shall be 115°C			
Insertion Loss(dB MAX) <u>.04 √f(GHz)</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Moisture Resistance <u>MIL-STD-202, Method 106,</u> except step 7b (vibration) shall be omitted			
RF Leakage (dB MIN) <u>-60 @ 2 to 3 GHz</u>	Center Contact Captivation:	Corrosion <u>MIL-STD-202,</u> Method 101, Cond. B, 5% salt spray			
Corona, 70,000 Ft (VRMS MIN) <u>190</u>	Axial (Lbs) <u>6.0</u>				
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>750</u>	Radial (In-Oz) <u>4.0</u>				
Contact Resistance (Milliohms MAX)					
Center Contact <u>2.0</u>					
Outer Contact <u>2.0</u>					
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>500</u>					
I.R. (Megohms Min) <u>5,000</u>					
			COMPONENT	MATERIAL	FINISH
			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON	DC DATE <u>6/2/70</u>	AMP Incorporated
			FRAC. DEC. ANGLES	CHECKED BY <u>TAR</u> <u>6/6/70</u>	140 Fourth Avenue
			* 1/64 * .005 * °	APP'D BY <u>SDS</u> <u>6/8/70</u>	Waltham, MA 02451-7599
			These drawings and specifications are the property of M/A-COM Interconnect Division and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASSY PROCEDURE	TITLE <u>OSSM 4-HOLE FLANGE MOUNT JACK RECEPTACLE STRAIGHT TERMINAL</u>
				NO. AP. <u>N/A</u>	SIZE <u>B</u> CODE IDENT NO. <u>26805</u> 1052-1201-02 REV <u>015</u>
				SCALE <u>5:1</u>	SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1045578-1
SHEET 1 OF 1 REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)