


- 1 HOUSING: POLYESTER, UL 94V-0 RATED, BLACK.  
 CONTACTS: PHOSPHOR BRONZE  
 RETENTION SCREWLOCKS: BRASS  
 SHELL: CARBON STEEL
- 2 SHELL: 5.08µm[.000200] MIN TIN OVER 2.54µm[.000100] MIN COPPER.  
 CONTACTS: 0.76µm[.000030] MIN GOLD FOR A LENGTH OF 1.40[.055] MIN FROM MATING END, 2.54µm[.000100] MIN TIN ON OPPOSITE END, BOTH OVER 1.27µm[.000030] MIN NICKEL OVER COPPER FLASH.  
 RETENTION SCREWLOCKS: 2.54µm[.000100] MIN TIN OVER 1.27µm[.000050] MIN NICKEL OVER COPPER FLASH.
- 3 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 4 2.79[.110] MAX IN SHELL TAB CLINCH AREAS.

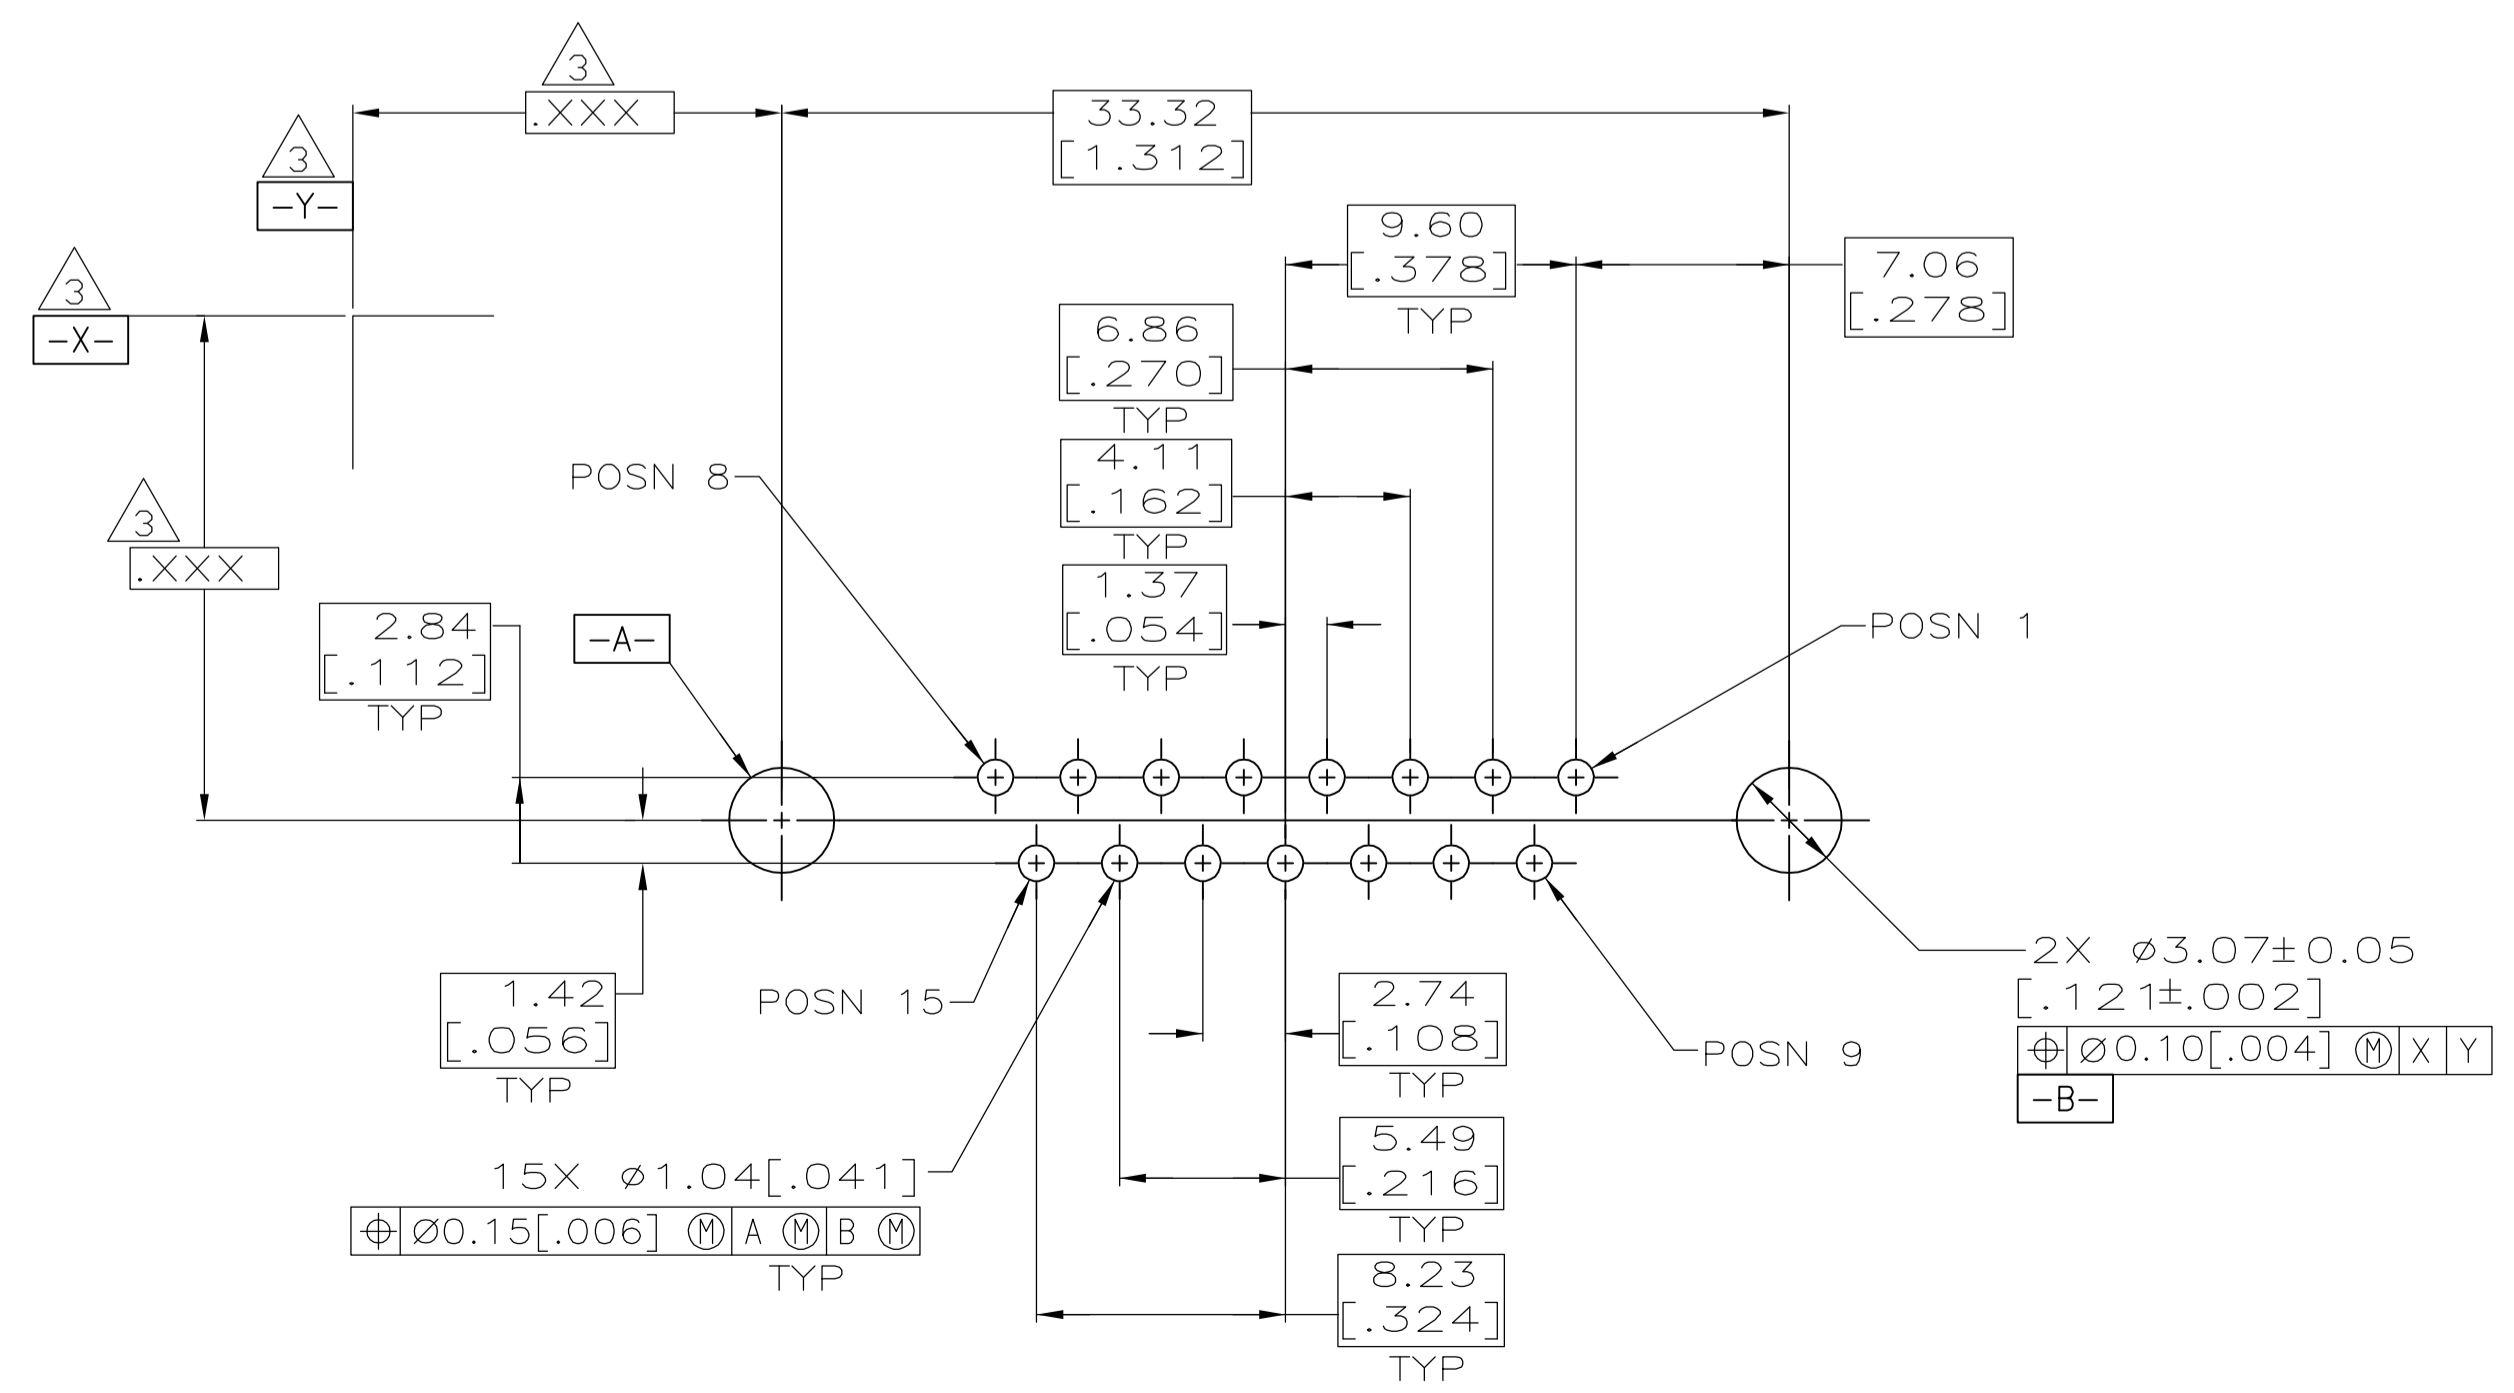

RECOMMENDED PC BOARD MOUNTING DIMENSIONS  
 1.57[.062] PC BOARD THICKNESS

5787683-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 9 LATTUCA 03OCT05	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm(INCHES)		CHK S. BOLASH 03OCT05	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY 03OCT05	NAME
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	RECEPTACLE ASSEMBLY, SIZE 2,
2 PLC ± 0.13 [0.005]	3 PLC ± -	APPLICATION SPEC	108-40025
4 PLC ± -	ANGLES ± ±	SIZE	RECEPTION SCREWLOCKS, AMPLIMITE HD-20
MATERIAL	FINISH	WEIGHT	SCALE
		A1 00779 C=5787683	4:1
CUSTOMER DRAWING		SHEET	REV
		1 OF 1	A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)

[>>点击查看相关商品](#)