

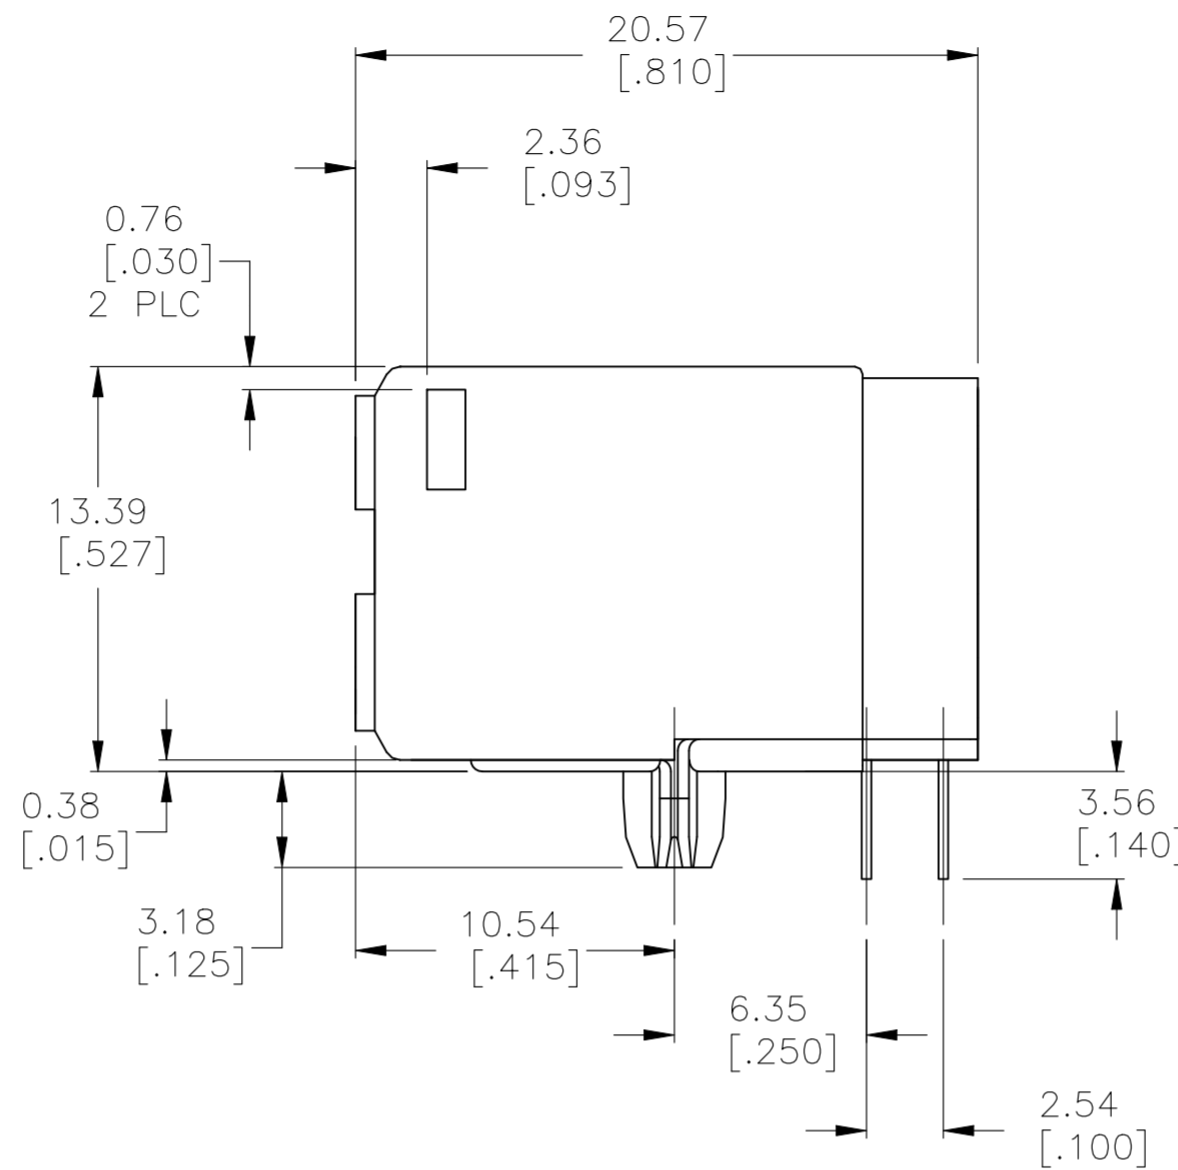
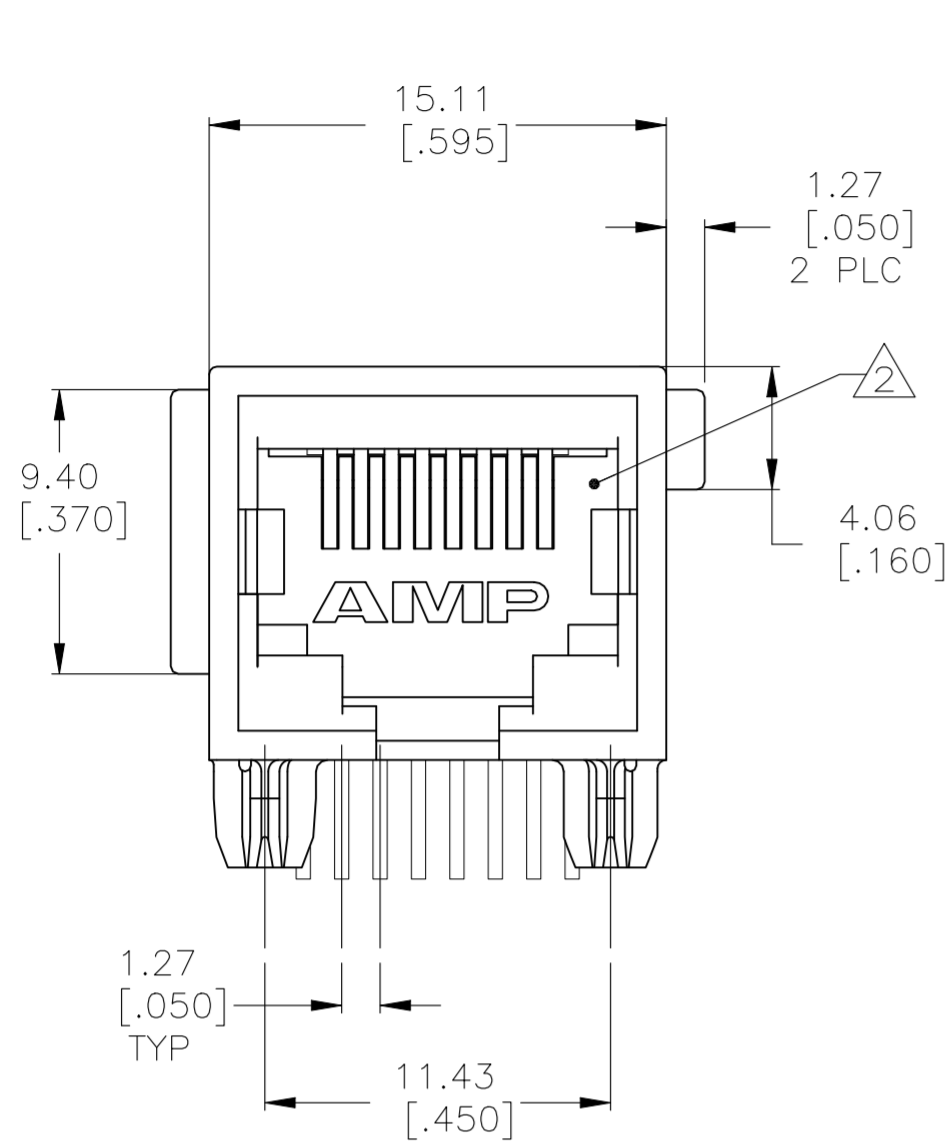



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B3		ECR-19-014657	13DEC2020	RR	SZ

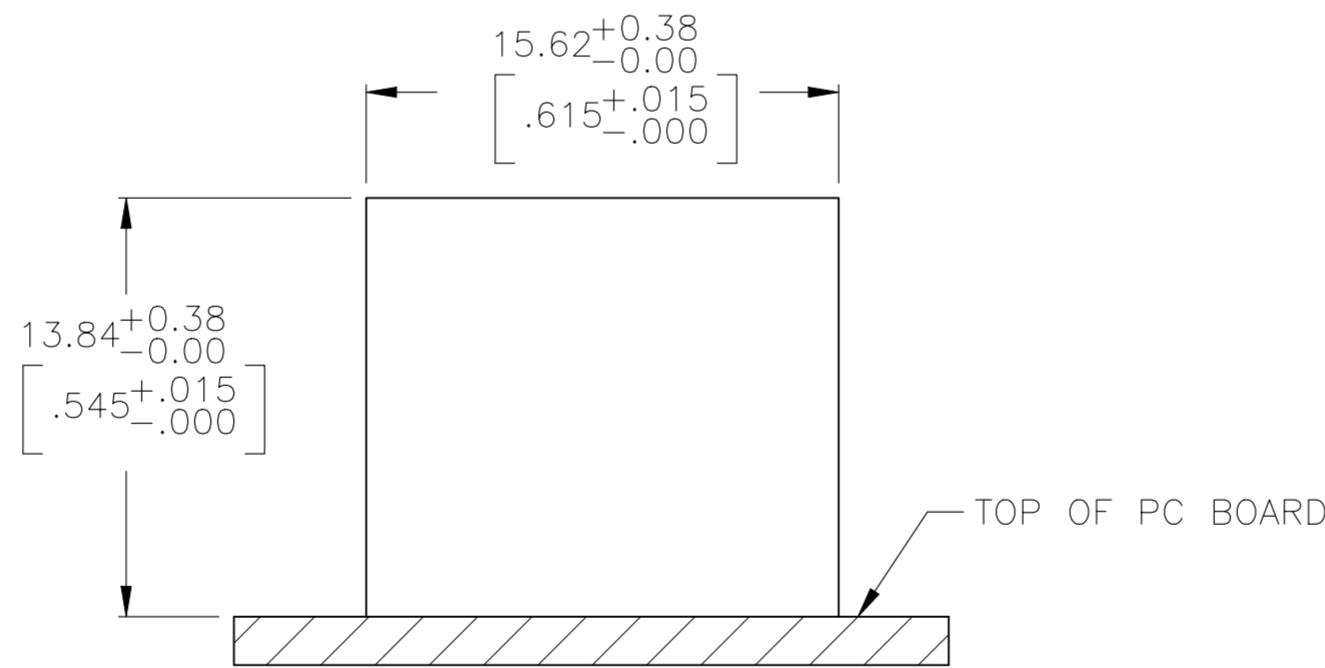

- ① MATERIAL: HOUSING—HIGH TEMPERATURE NYLON, BLACK, UL 94V-0.
TERMINALS - 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27µm[.000050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81µm [.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27µm[.000050] MINIMUM THICK NICKEL UNDERPLATE.
- ② JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- ③ CAUTION: CATEGORY 5 JACK SOLDER TAIL POSITIONS DO NOT FOLLOW SAME NUMBER SEQUENCE AS THAT OF TRADITIONAL JACKS.
- ④ USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

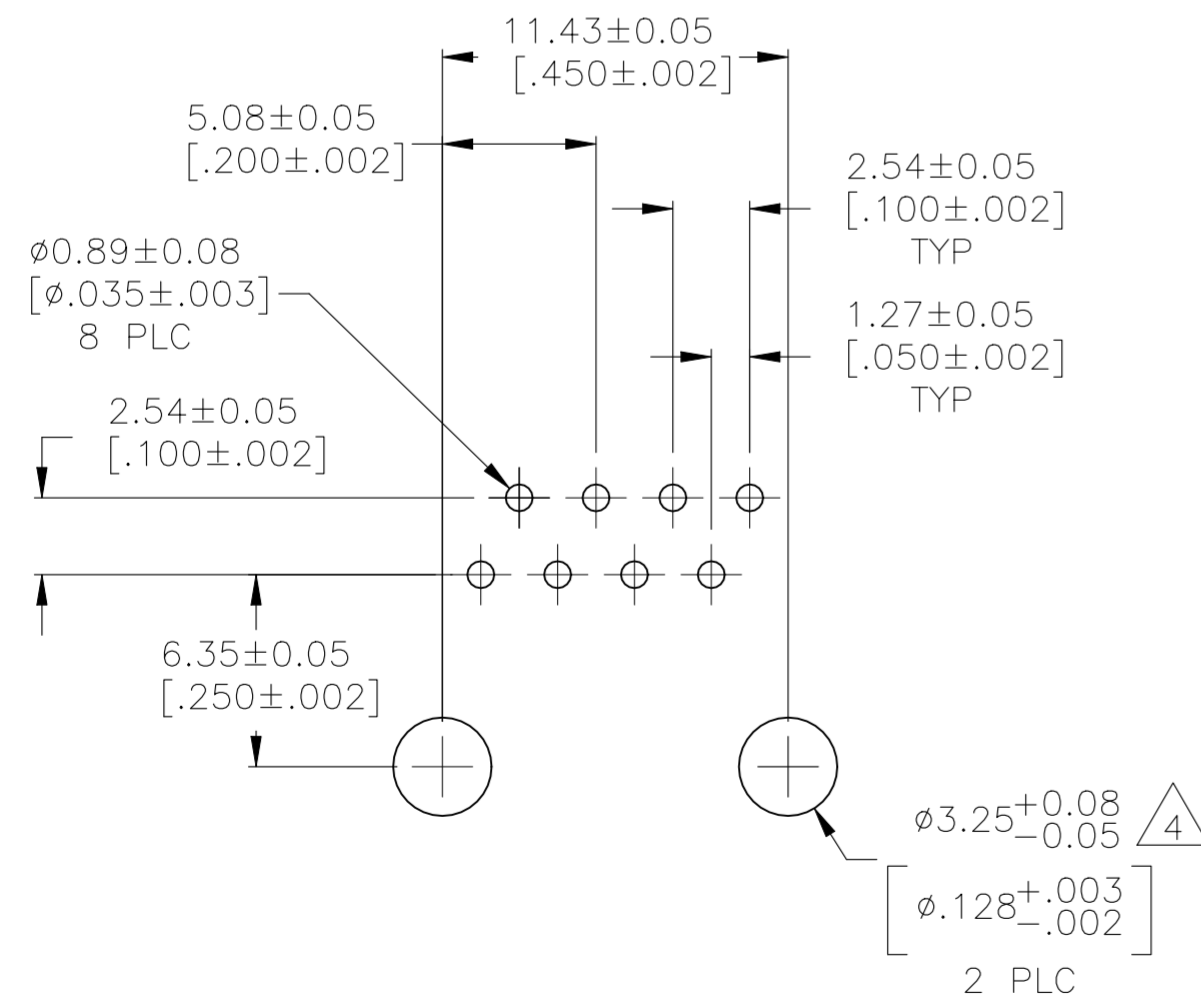

SUGGESTED PANEL CUTOUT SCALE 2:1

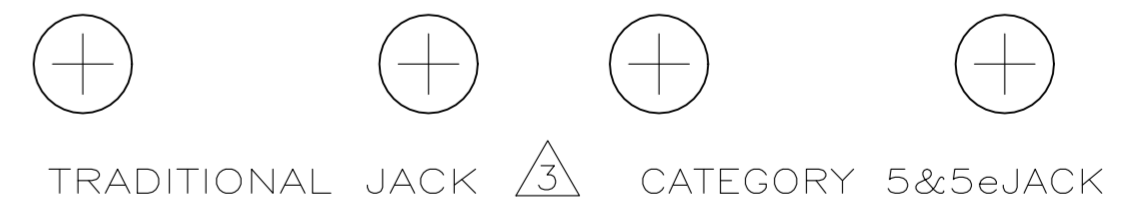

SUGGESTED PC BOARD LAYOUT COMPONENT SIDE

5558343-1 PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA 20SEPT05																					
DIMENSIONS: mm [INCHES]		CHK J. WESTMAN 20SEPT05																					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. FLICKINGER 20SEPT05	NAME MODULAR JACK ASY, 8 POSITION, R/A, LOW PROFILE, CATEGORY 5e, W/PANEL STOPS																				
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>0.25[.010]</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	0.25[.010]	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	PRODUCT SPEC 108-1163	SIZE A2	CAGE CODE 00779	DRAWING NO C=5558343
0 PLC	±	-																					
1 PLC	±	-																					
2 PLC	±	0.25[.010]																					
3 PLC	±	-																					
4 PLC	±	-																					
ANGLES	±	-																					
MATERIAL SEE NOTE 1		FINISH SEE NOTE 1	WEIGHT 0.000000	SCALE 4:1	SHEET 1 OF 1																		
		CUSTOMER DRAWING		REV B3																			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)