


- NOTES:**
- ⚠ MATERIAL CONTACT; PHOSPHORBRONZE  
MATERIAL HOUSING;  
GLASSFILLED POLYESTER UL-RATING 94VO (GRAY)
  - ⚠ GENERAL PLATING SPECIFICATION; UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN.  
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
  - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
  - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
  - ⚠ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE  
THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
  - ⚠ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 95 HOLES  
FITS WITH INTEGRATED GROUND RETURN UPSHIELD,  
BASIC P.N. 352028  
AND INTEGRATED GROUND RETURN LOWERSHIELD,  
BASIC P.N. 352029
  - ⚠ CONNECTOR ASSEMBLED WITH ALTERNATE FEMALE CONTACTS.  
1,27μm MIN GOLD PLATING AT MATING SURFACES, NO LUBRICANT.

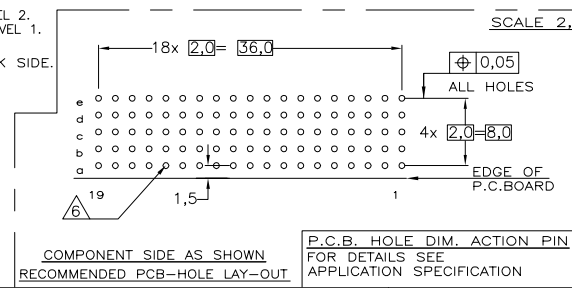

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	±0.2
Ø	±0.05

MATERIAL: - FINISH: -

FINISH	MATERIAL	2170349-5
PARTNUMBER		
<b>TE</b> TE Connectivity		
APPROVED BY: SANDERS, YAN 10MAY2012	NAME: ALEX CAI 10MAY2012	RESTRICTED TO: -
PRODUCT SPEC: 108-19082		
APPLICATION SPEC: 114-19029		
SIZE: A2	CAGE CODE: 00779	DRAWING NO: 2170349
CUSTOMER DRAWING		SCALE: NTS SHEET 1 of 1 REV: A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)