

REV. A


DCO 144520

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	1350 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 Hz TO 3000 Hz @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE 4 MS MAX. RELEASE 6 MS MAX. CONTACT STABILATION 2.0 MS MAX.

CUSTOMER DATA SHEET

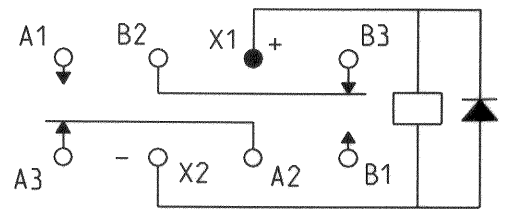

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. B.D. 11SEP2008

CK. *[Signature]*

Tyco Electronics

©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL
CUST. NO. M39016/37-021P REV.

TE NUMBER
3-1617073-4

CII PART NUMBER

3SBC 2091A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)