


DESIGNED FOR USE WITH  
.085 SEMI-RIGID CABLE  
CABLE ENTRY DIAMETER  
MINIMUM  
SLEEVE .089

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
03 <sub>0</sub>	REVISED	12/14/94	<i>JAD</i>

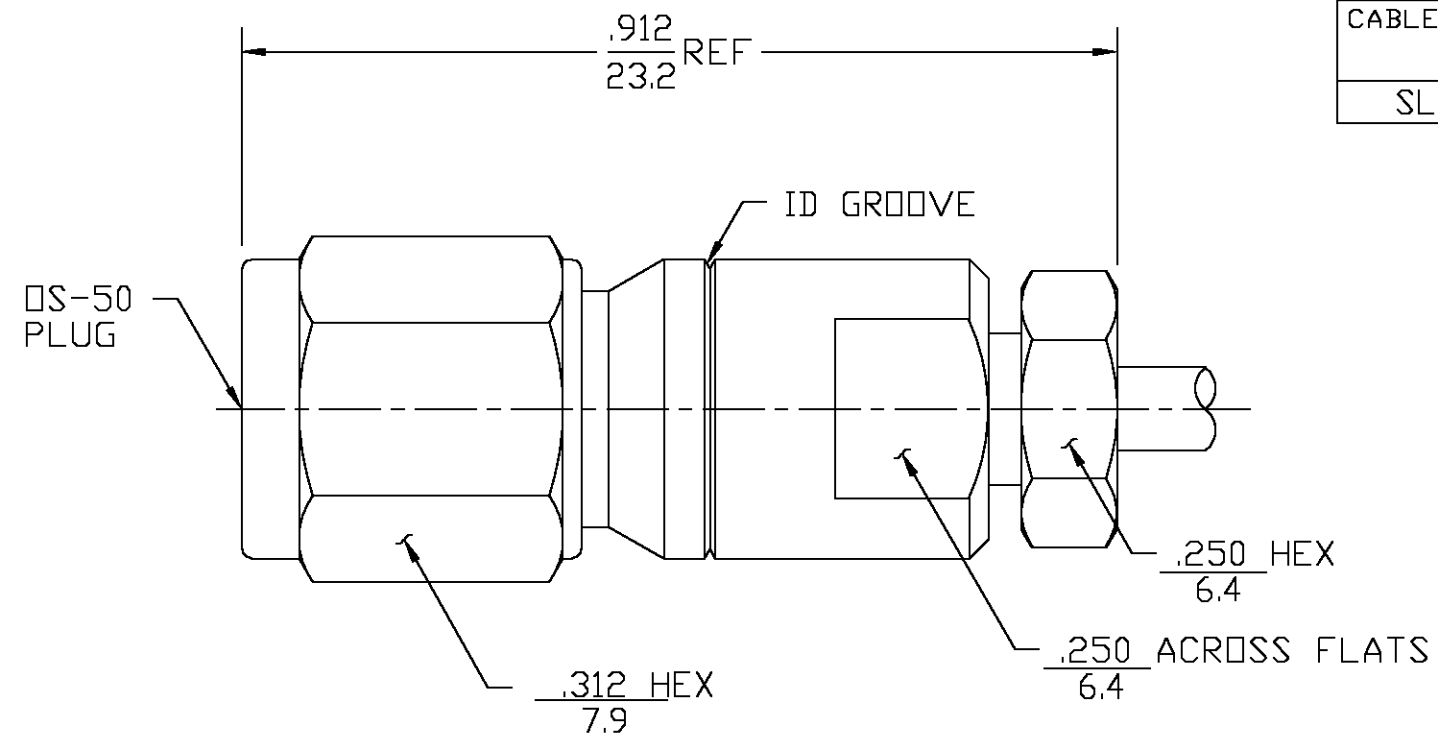

1063291-1  
PART NUMBER

COMPONENT	MATERIAL	FINISH
HOUSING CLAMP NUT BUSHING COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER QQ-P-35
SLEEVE	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197 ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICON RUBBER PER ZZ-R-765	N/A

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
NOMINAL IMPEDANCE (OHMS) <u>50 ± 1</u>	Interface Dimensions <u>See Catalogue</u>	TEMPERATURE RATING <u>-55° TO +125°C</u>
Frequency Range (GHz) DC to <u>50</u>	Mating Characteristics:	Vibration MIL-STD-202, Method 204, Condition D, 20Gs
Volt Rating (VRMS MAX) @ Sea Level <u>N/A</u>	Insertion (MAX Lbs) <u>2</u>	Shock MIL-STD-202, Method 213, Condition I, 100Gs
VSWR DC to 18 GHz : <u>1.11MAX</u>	Withdrawal (MIN Oz) <u>1</u>	Thermal Shock MIL-STD-202, Method 107, Condition B
18 to 26.5 GHz : <u>1.13MAX</u>	Force to Engage (In/Lbs MAX) <u>2</u>	Moisture Resistance MIL-STD-202, Method 106
26.5 to 50 GHz : <u>1.29MAX</u>	Center Contact Captivation	Corrosion - MIL-STD-202, Method 101, Condition B
Insertion Loss (dB MAX) <u>.07x√F(GHz)</u>	Axial (Lbs) <u>4</u>	
RF Leakage (dB MIN) (Interface Only, Fully Mated) <u>-(90-f(GHz))</u>	Cable Retention	
Corona, 70,000 Ft (VRMS MIN) <u>150</u>	Axial (Lbs MIN) <u>30</u>	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>500</u>	Torque (In-Oz) <u>16</u>	
Contact Resistance (Milliohms MAX)		
Center Contact <u>4.0</u>		
Outer Contact <u>4.0</u>		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>600</u>		
I.R.(Megohms MIN) <u>5000</u>		

.XXX = in  
XX.X = mm

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN BY <u>DAC</u>	DATE <u>12-01-88</u>	<b>AMP</b>	AMP Incorporated	
FRAC. DEC. ANGLES ± 1/64 ± .005 ± 1°		CHECKED BY <u>DAC</u>	<u>12-14-88</u>		140 Fourth Avenue Waltham, MA 02451-7599	
		APPROVED BY <u>R.G.</u>	<u>12-14-88</u>			
These drawings and specifications are the property of M/A CDM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE  408-04616 (85-002) NO. AP. _____		TITLE <b>DS-50 PLUG SOLDER CLAMP</b>		
SIZE <b>B</b>	CODE IDENT NO. <b>26805</b>	<b>8501-7885-02</b>		REV <b>03<sub>0</sub></b>		
SCALE <b>5:1</b>			SHEET <b>1</b> OF <b>1</b>			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)