

Thermofit[®] Molded Parts Specification Control Drawing

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

LIMITED DISTRIBUTION

NOTES

- ALL DIMENSIONS ARE IN $\frac{\text{INCHES}}{\text{(MILLIMETERS)}}$
- DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS:
a - AS SUPPLIED
b - AFTER UNRESTRICTED RECOVERY
- COATING IS OPTIONAL. AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS. WHEN COATING IS ADDED, ENTRY DIAMETERS WILL BE REDUCED BY .06 MAX.

- DRAIN HOLES ADDED.

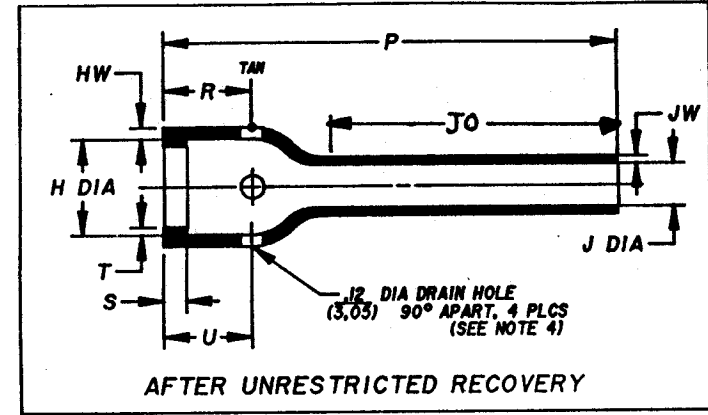
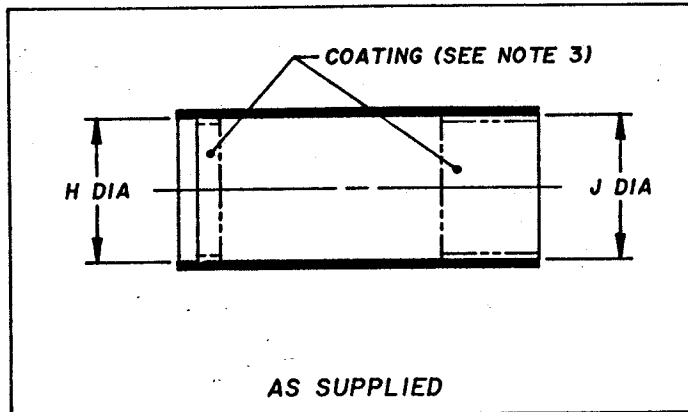


TABLE OF DIMENSIONS

| PART NUMBER | H | | J | | | P ±10% b | JO ±10% b | R Ref b | S Ref b | T Ref b | U ±10% b | HW ±20% b | JW ±20% b |
|--------------|----------------|----------------|----------------|----------------|---------------|-----------------|-----------------|---------------|---------------|----------------|----------------|-----------------|-----------------|
| | Min a b | Max b | Min a b | Min a b | Max b | | | | | | | | |
| 202D211-X-09 | .88 (22,4) | .45 (11,4) | .88 (22,4) | .55 (14,0) | .25 (6,4) | 4.17 (105,9) | 3.40 (86,4) | .46 (11,7) | .12 (3,0) | .04 (1,0) | .47 (11,9) | .06 (1,52) | .045 (1,14) |
| 202D221-X-09 | 1.01 (25,7) | .59 (15,0) | 1.01 (25,7) | .63 (16,0) | .29 (7,4) | 4.77 (121,2) | 3.88 (98,6) | .48 (12,2) | .12 (3,0) | .04 (1,0) | .47 (11,9) | .06 (1,52) | .045 (1,14) |
| 202D232-X-09 | 1.16 (29,5) | .74 (18,8) | 1.16 (29,5) | .72 (18,3) | .33 (8,4) | 5.46 (138,7) | 4.44 (112,8) | .48 (12,2) | .12 (3,0) | .04 (1,0) | .47 (11,9) | .07 (1,78) | .045 (1,14) |
| 202D242-X-09 | 1.34 (34,0) | .90 (22,9) | 1.34 (34,0) | .84 (21,3) | .38 (9,7) | 6.28 (159,5) | 5.15 (130,8) | .48 (12,2) | .12 (3,0) | .04 (1,0) | .47 (11,9) | .07 (1,78) | .045 (1,14) |
| 202D253-X-09 | 1.47 (37,3) | 1.16 (29,5) | 1.47 (37,3) | .91 (23,1) | .41 (10,4) | 7.00 (177,8) | 5.60 (142,2) | .55 (14,0) | .12 (3,0) | .065 (1,65) | .47 (11,9) | .08 (2,0) | .045 (1,14) |
| 202D263-X-09 | 1.72 (43,7) | 1.34 (34,0) | 1.72 (43,7) | 1.07 (27,2) | .48 (12,2) | 8.00 (203,2) | 6.42 (163,1) | .60 (15,2) | .12 (3,0) | .065 (1,65) | .47 (11,9) | .08 (2,0) | .045 (1,14) |
| 202D274-X-09 | 1.97 (50,0) | 1.62 (41,2) | 1.97 (50,0) | 1.24 (31,5) | .56 (14,2) | 8.00 (203,2) | 6.21 (157,7) | .60 (15,2) | .12 (3,0) | .065 (1,65) | .47 (11,9) | .09 (2,3) | .055 (1,40) |
| 202D285-X-09 | 2.47 (62,7) | 1.85 (47,0) | 2.47 (62,7) | 1.54 (39,1) | .69 (17,5) | 8.00 (203,2) | 6.03 (153,2) | .63 (16,0) | .12 (3,0) | .08 (2,0) | .63 (16,0) | .10 (2,5) | .055 (1,40) |
| 202D296-X-09 | 2.73 (69,3) | 2.35 (59,7) | 2.73 (69,3) | 1.70 (43,2) | .77 (19,8) | 8.00 (203,2) | 5.64 (143,3) | .63 (16,0) | .12 (3,0) | .08 (2,0) | .63 (16,0) | .10 (2,5) | .055 (1,40) |
| 202D299-X-09 | 3.22 (81,8) | 2.64 (67,1) | 3.22 (81,8) | 2.01 (51,1) | .90 (22,9) | 8.00 (203,2) | 5.45 (138,4) | .63 (16,0) | .12 (3,0) | .08 (2,0) | .63 (16,0) | .10 (2,5) | .055 (1,40) |

Raychem

RAYCHEM CORPORATION
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025
(415) 361-6055

Revision : A Part Number : 202D2XX-X-09
Date : 06-06-85 Description : BOOT, STRAIGHT, WITH LIP

Thermofit[®] Molded Parts


Specification Control Drawing

Part Number : 202D2XX-X-09
Description : BOOT, STRAIGHT, WITH LIP

LIMITED DISTRIBUTION

| COMPATABILITY CHART | | | | | |
|---------------------|----------------------------|---------|-------------------|------------------------|---------------------|
| MATERIAL DASH NO. | MATERIAL DESCRIPTION | RT SPEC | COATING SLASH NO. | COATING S NO. | COATING DESCRIPTION |
| -3 | Polyolefin, semi-rigid | RT-301 | /42, /86, /87 | S-1017: S-1048: S-1052 | Adhesive |
| -4 | Polyolefin, flexible | RT-1304 | /42, /86, /87 | S-1017: S-1048: S-1052 | Adhesive |
| -5 | Neoprene | RT-501 | /42 | S-1017: S-1048: S-1052 | Adhesive |
| -6 | Silicone | RT-602 | N/A | | |
| -12 | Viton | RT-1312 | N/A | | |
| -25 | Elastomer, fluid resistant | RT-1325 | N/A | | |

ORDERING INFORMATION

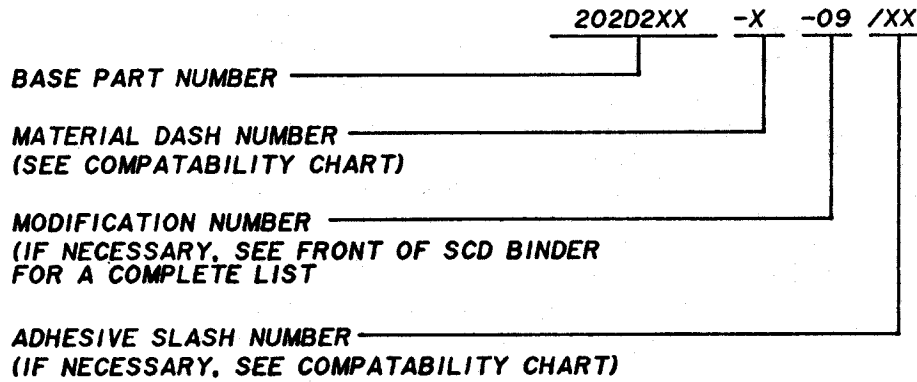

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT YOUR
NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)