


If this document is printed it becomes uncontrolled. Check for the latest revision

REVISIONS		
REV	DESCRIPTION	DATE
C	REVISED PER DCR NO. R060217	03/30/2006

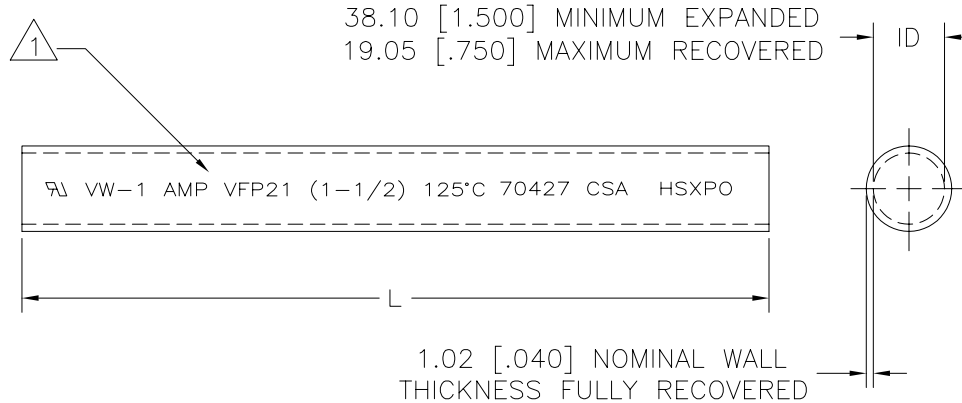

1 TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED

- TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.
- TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.
- WEIGHT PER LINEAR FOOT/304.8 mm: 22.2 g/.049 lbs.
- MATERIAL: BLACK POLYOLEFIN

30.5 m [100 ft] MINIMUM	603331-2
1.22 m [4 ft] MINIMUM	603331-1
LENGTH L	PART NO.

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS.	DRAWN	UNGUYEN	03/30/2006	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA, USA 94025
	APPROVED	JKUSTER	03/30/2006	
DECIMALS	CAD NAME			TITLE
.XX ± .01 [0.004 in]	R060217			AMPSULATION VFP21 1-1/2 INCH ID, BLACK
.X ± .1 [0.04 in]	THIRD ANGLE PROJECTION			SIZE
ANGLES				CODE IDENT. NO.
.X ± 0.5 DEG				DWG. NO.
				B 06090 603331
				DO NOT SCALE THIS DRAWING
				SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)