



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	J	REVISED PER ECO-13-015151		17DEC2013	FL	FY	

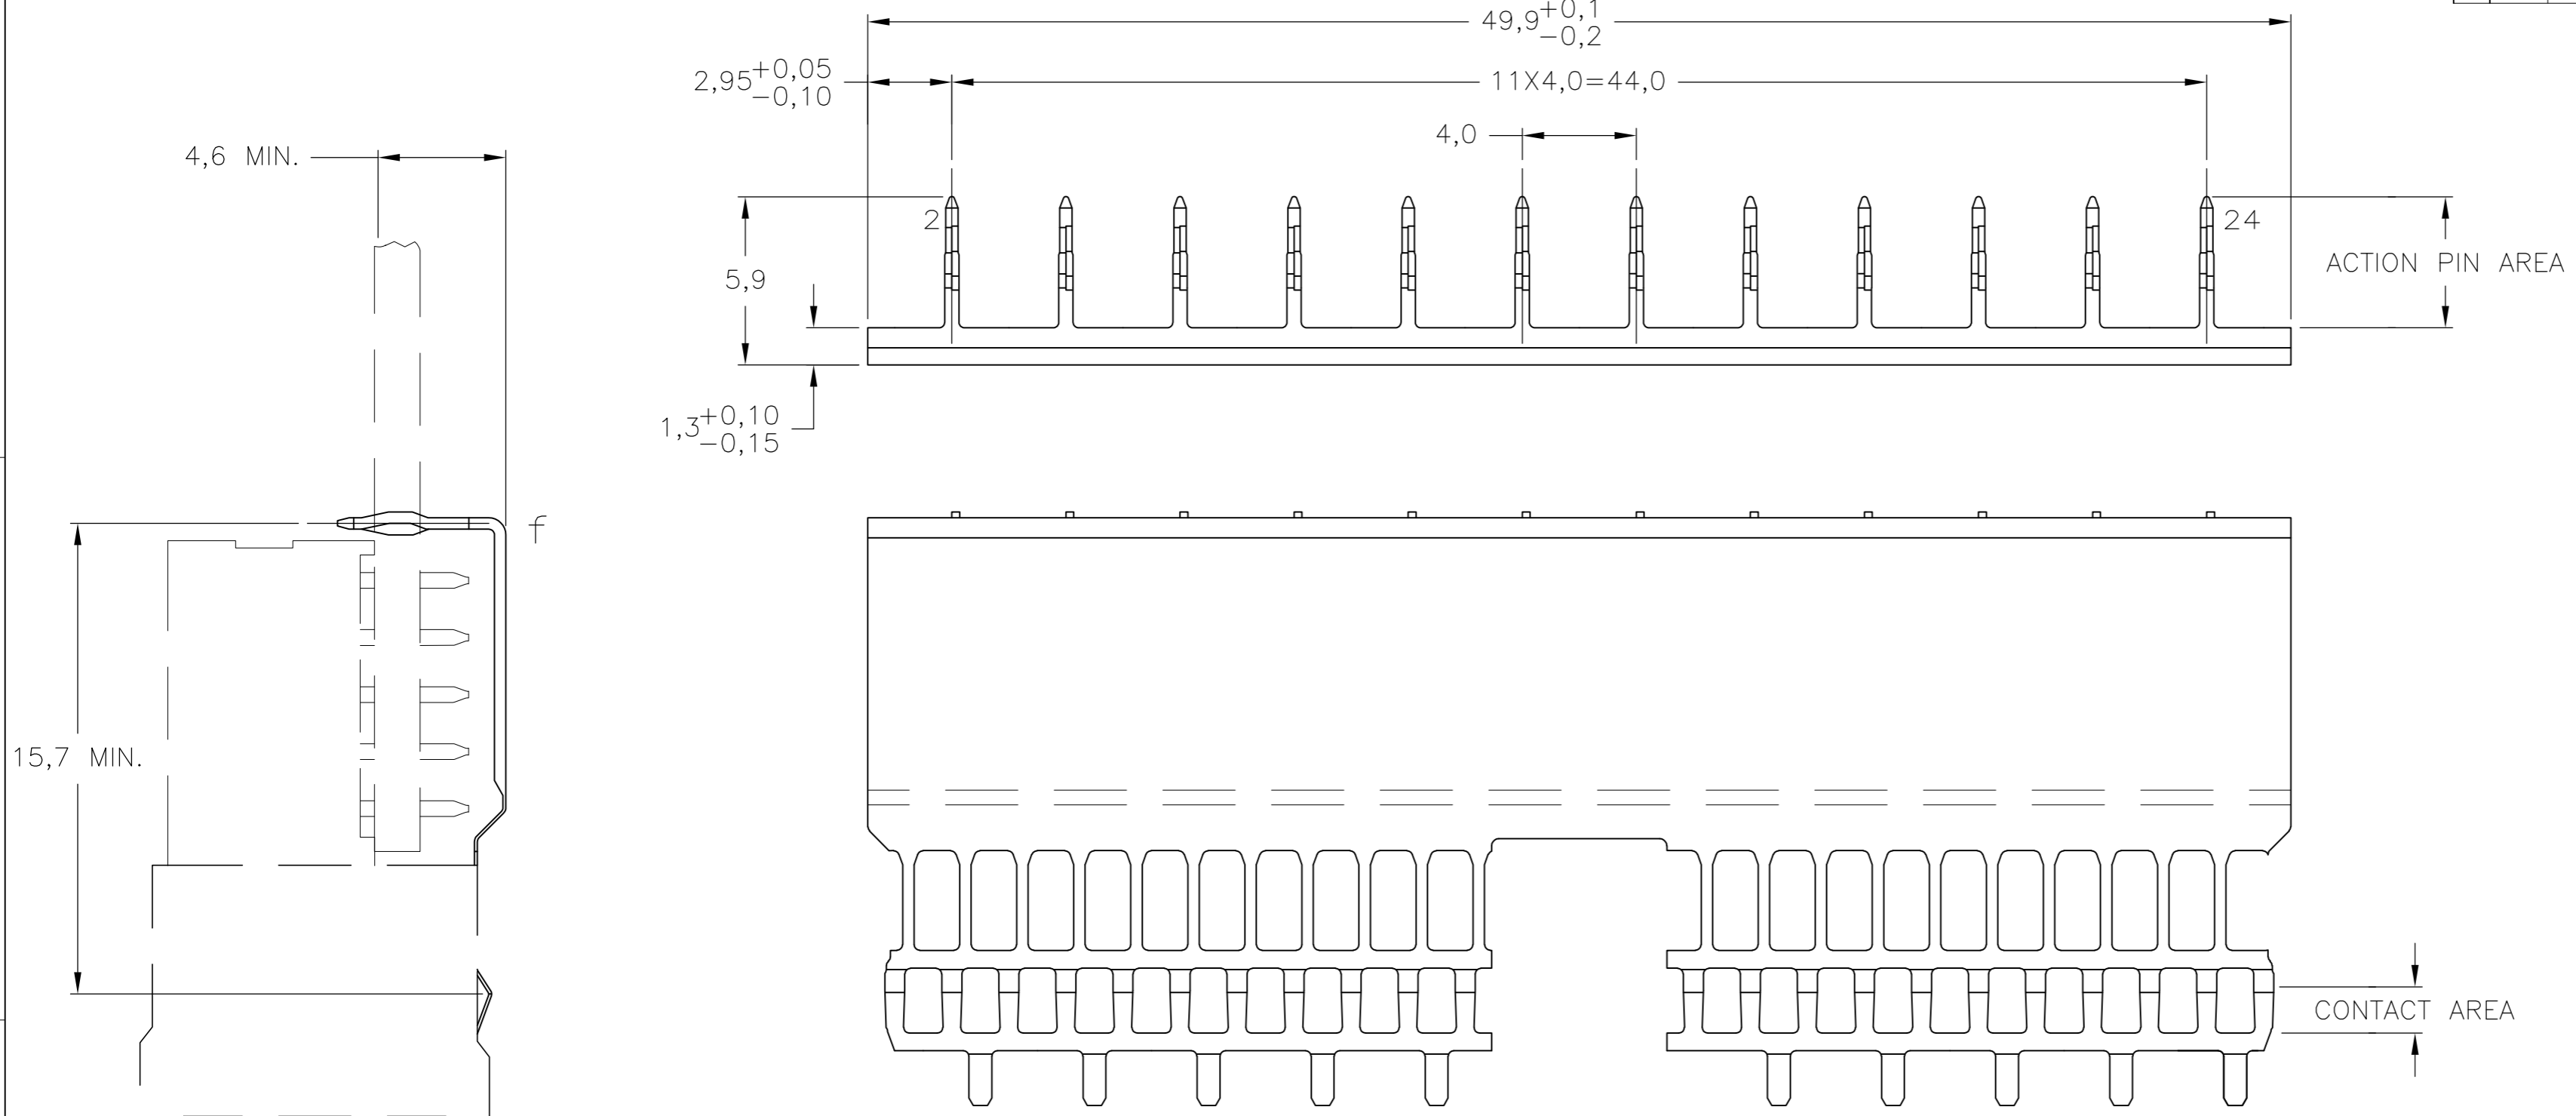

- NOTES:**
- ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - ⚠ MATERIAL; PHOSPHORBRONZE.
 - ⚠ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. MAX. BOARD THICKNESS 3,5 mm.
 - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - ⚠ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

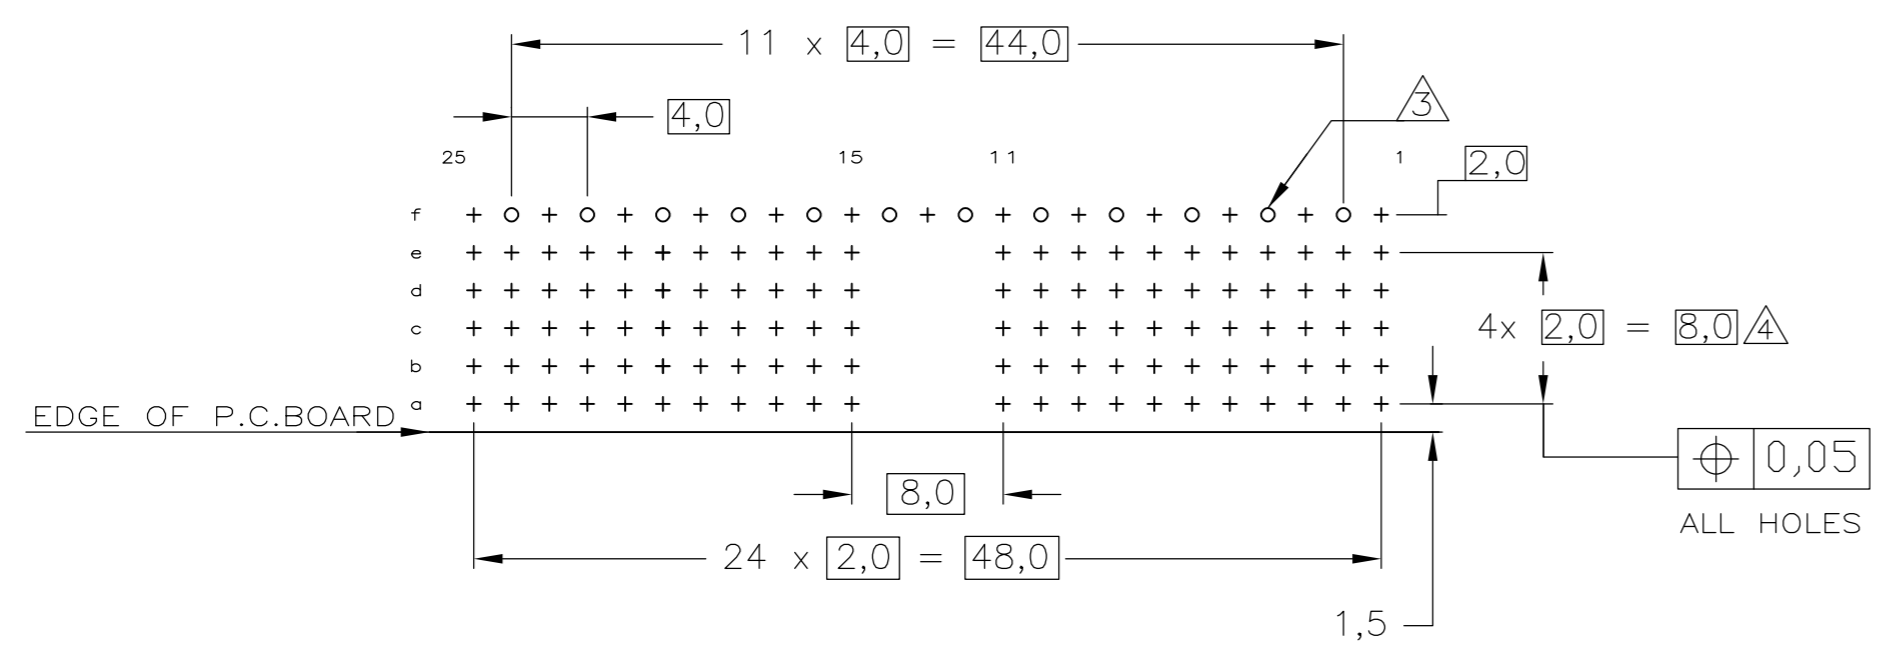

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE APPLICATION SPECIFICATION

OBSOLETE	⚠ ⚠ ⚠ ⚠	⚠	4-338108-0
	⚠ ⚠ ⚠	⚠	-338108-9-
	⚠ ⚠	⚠	338108-2
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 27-11-96	TE Connectivity	
DIMENSIONS: mm		CHK W. v.d.HEIJDEN 27-11-96		
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		APVD F. v.KONINGSBRUGGE	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE A	
		PRODUCT SPEC 108-19082	SIZE A2	CAGE CODE 00779
MATERIAL		APPLICATION SPEC 114-19029	DRAWING NO C=338108	RESTRICTED TO
FINISH		WEIGHT	SCALE 5:1	SHEET 1 of 1
		CUSTOMER DRAWING	REV J	

338108

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)