



LOC		DIST		REVISIONS			
AD	00	REV	DATE	BY	CHK	APPV	
D	REVIS	PER	ECO-14-000069	15APR2014	NK	MM	

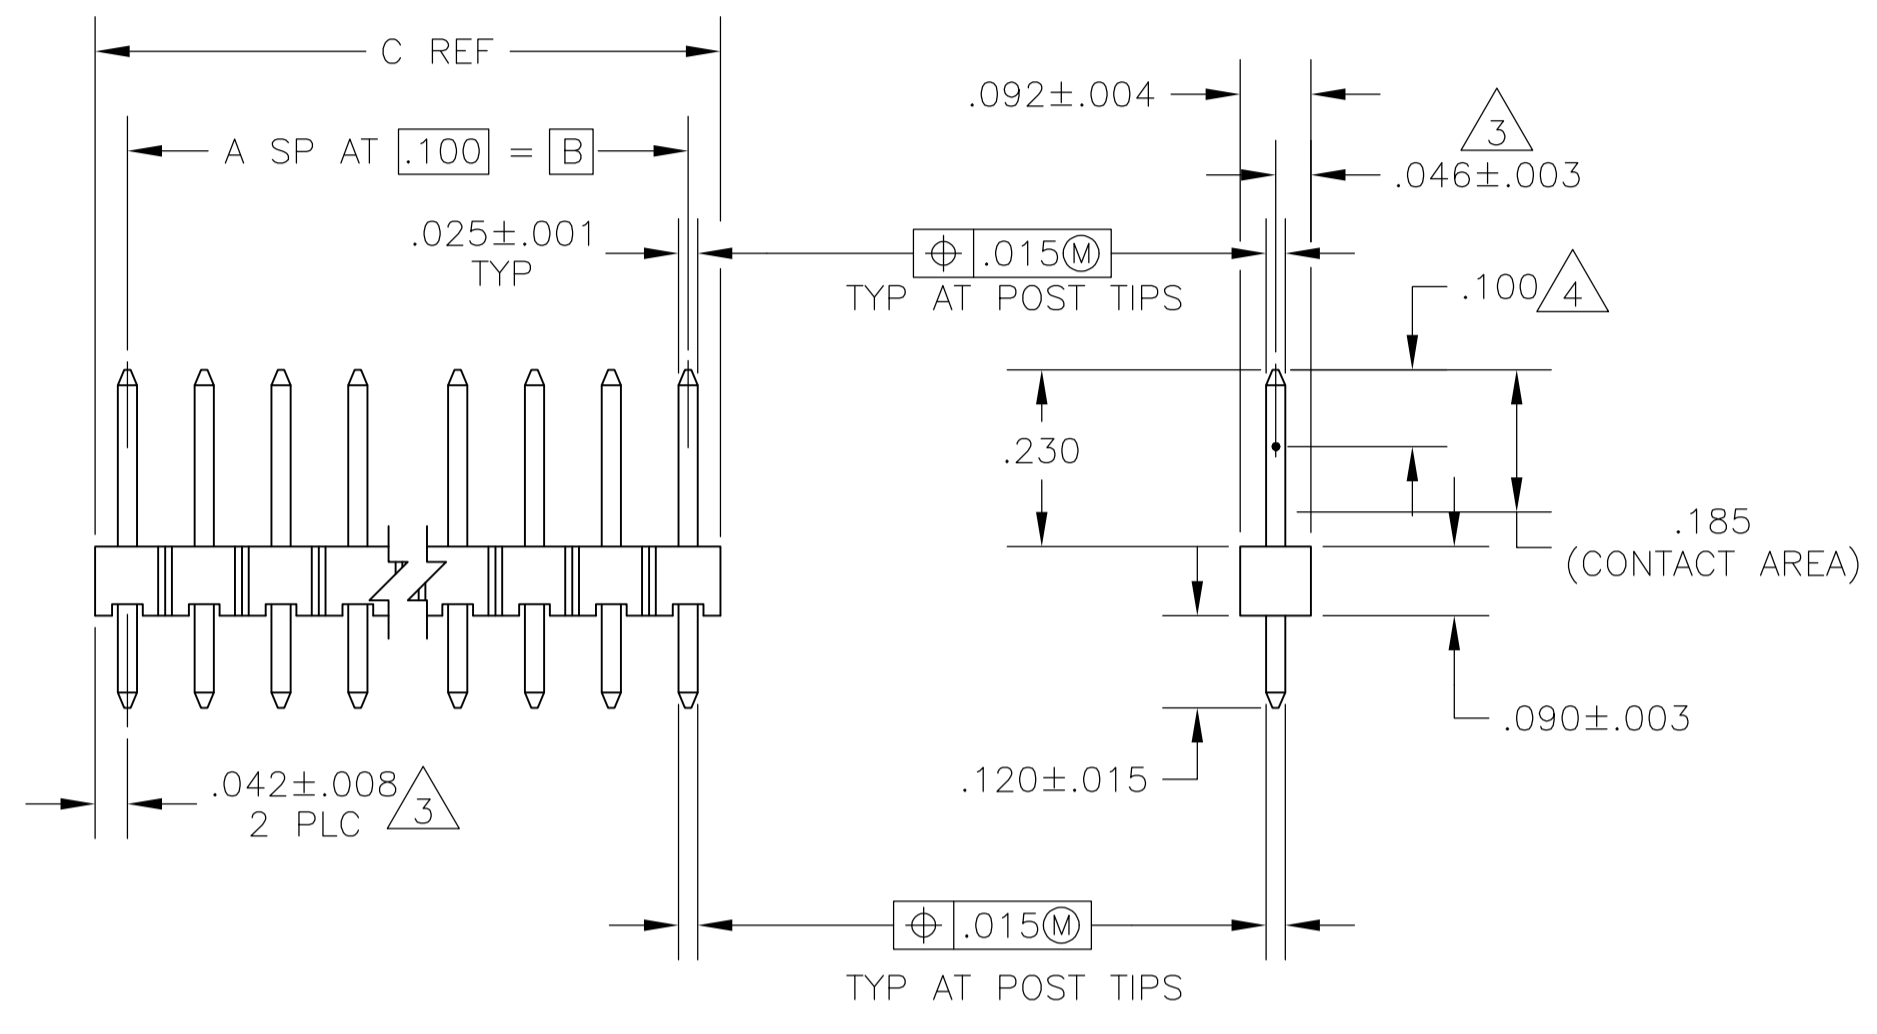

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- POINT OF MEASUREMENT FOR PLATING THICKNESS

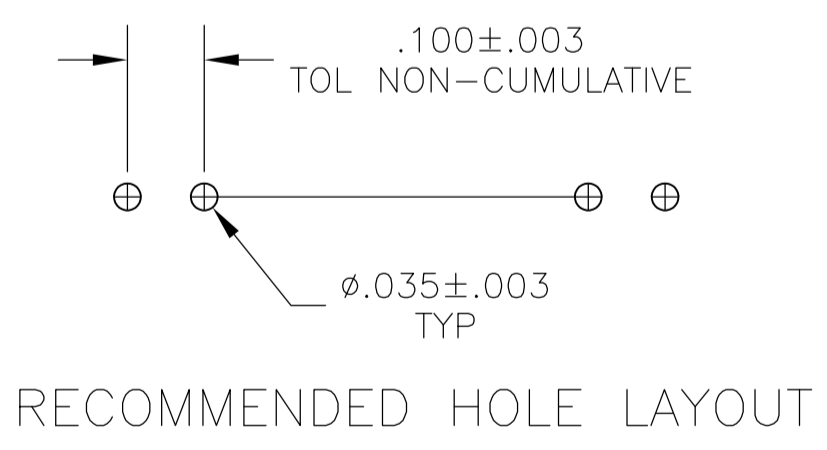

.284	.200	2	3	1571839-2
.184	.100	1	2	1571839-1
C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	ANGLES ± -
MATERIAL: HOUSING: FRAME BETWEEN HIGH TEMPERATURE THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY		FINISH: PARTS: 000030 0003 ON CONTACT SURF. 0001 100 000000 ON SURF. INLALD OVER 000050 NICKEL		WEIGHT: -		SIZE: A1	
CUSTOMER DRAWING		SCALE: 4:1		SHEET: 1 OF 1		REV: D	

DIN: R BROWN 24MAY04  
 CHK: J GESFORD 24MAY04  
 APPV: R BENDORF 24MAY04  
 NAME: HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERTICAL, .025 SQUARE POSTS, LEAD-FREE, HIGH TEMP  
 APPLICATION SPEC: -  
 SIZE: A1 00779 C=1571839  
 SCALE: 4:1 SHEET: 1 OF 1 REV: D

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)