


REV. 0
 DCO 15692

COIL: @ 25°C	
RESISTANCE	5000 OHMS ±10%
NOMINAL VOLTAGE	28.0 VDC
MUST OPERATE	2.8 mADC
MUST RELEASE	0.3 mADC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX ① (HI-G IS 8 MS)
 RELEASE 10 MS MAX ② (HI-G IS 4 MS)

CUSTOMER DATA SHEET

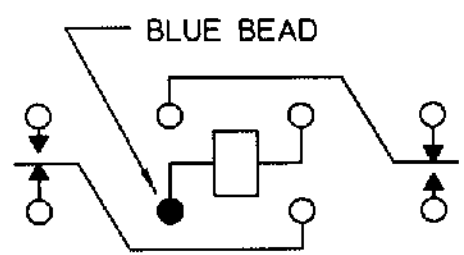

CONTACT RATING: 2 AMPS 30 VDC
 RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/4/99 CK 2/13/00



CUST. HI-G
 CUST. NO. 2BK-2A-128

TYPE 'SF' RELAY

SF6201W01

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)