


TIMING DIAGRAM

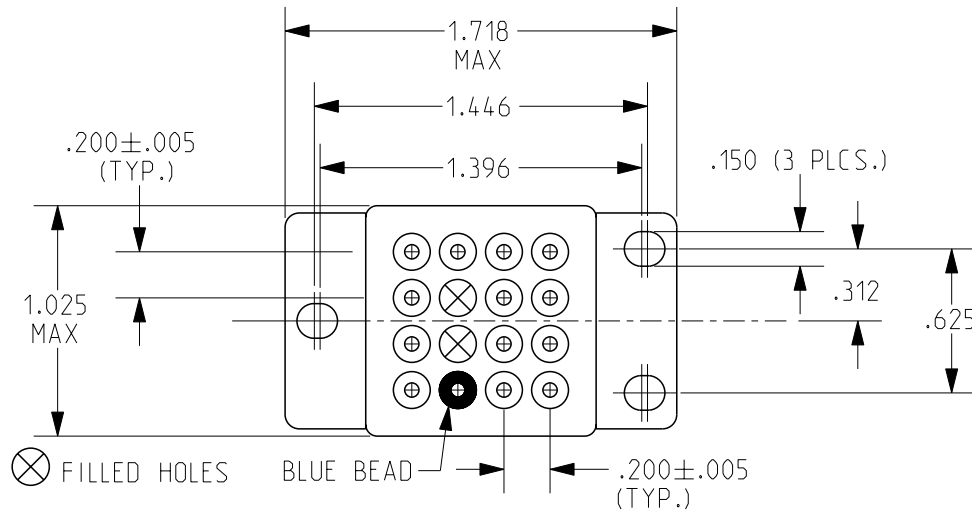


REV. A  
DCO 301671

TOLERANCES  $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C  
 OPERATING CURRENT \_\_\_\_\_ 150 mA max.  
 INPUT VOLTAGE \_\_\_\_\_ 20-30 VDC  
 CONTROL VOLTAGE \_\_\_\_\_ 20-30 VDC  
 CONTROL CURRENT \_\_\_\_\_ 15 mA max.

ENVIRONMENT:  
 VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ Hz TO \_\_\_\_\_ 3000 \_\_\_\_\_ Hz @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 100 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -55 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

CUSTOMER DATA SHEET

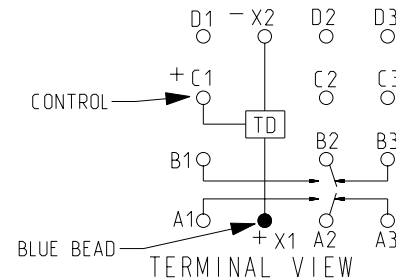

CONTACT RATING: \_\_\_\_\_ LOW LEVEL  
 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE  
 100,000 OPERATIONS

DR. R.F. 1/20/2015 CK. J.M.B. 1/20/2015



CUST. \_\_\_\_\_ QPL  
 CUST. NO. M83726/29-5003P REV. ----

TE NUMBER  
 6-1617813-3

TD229-5003P

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)