
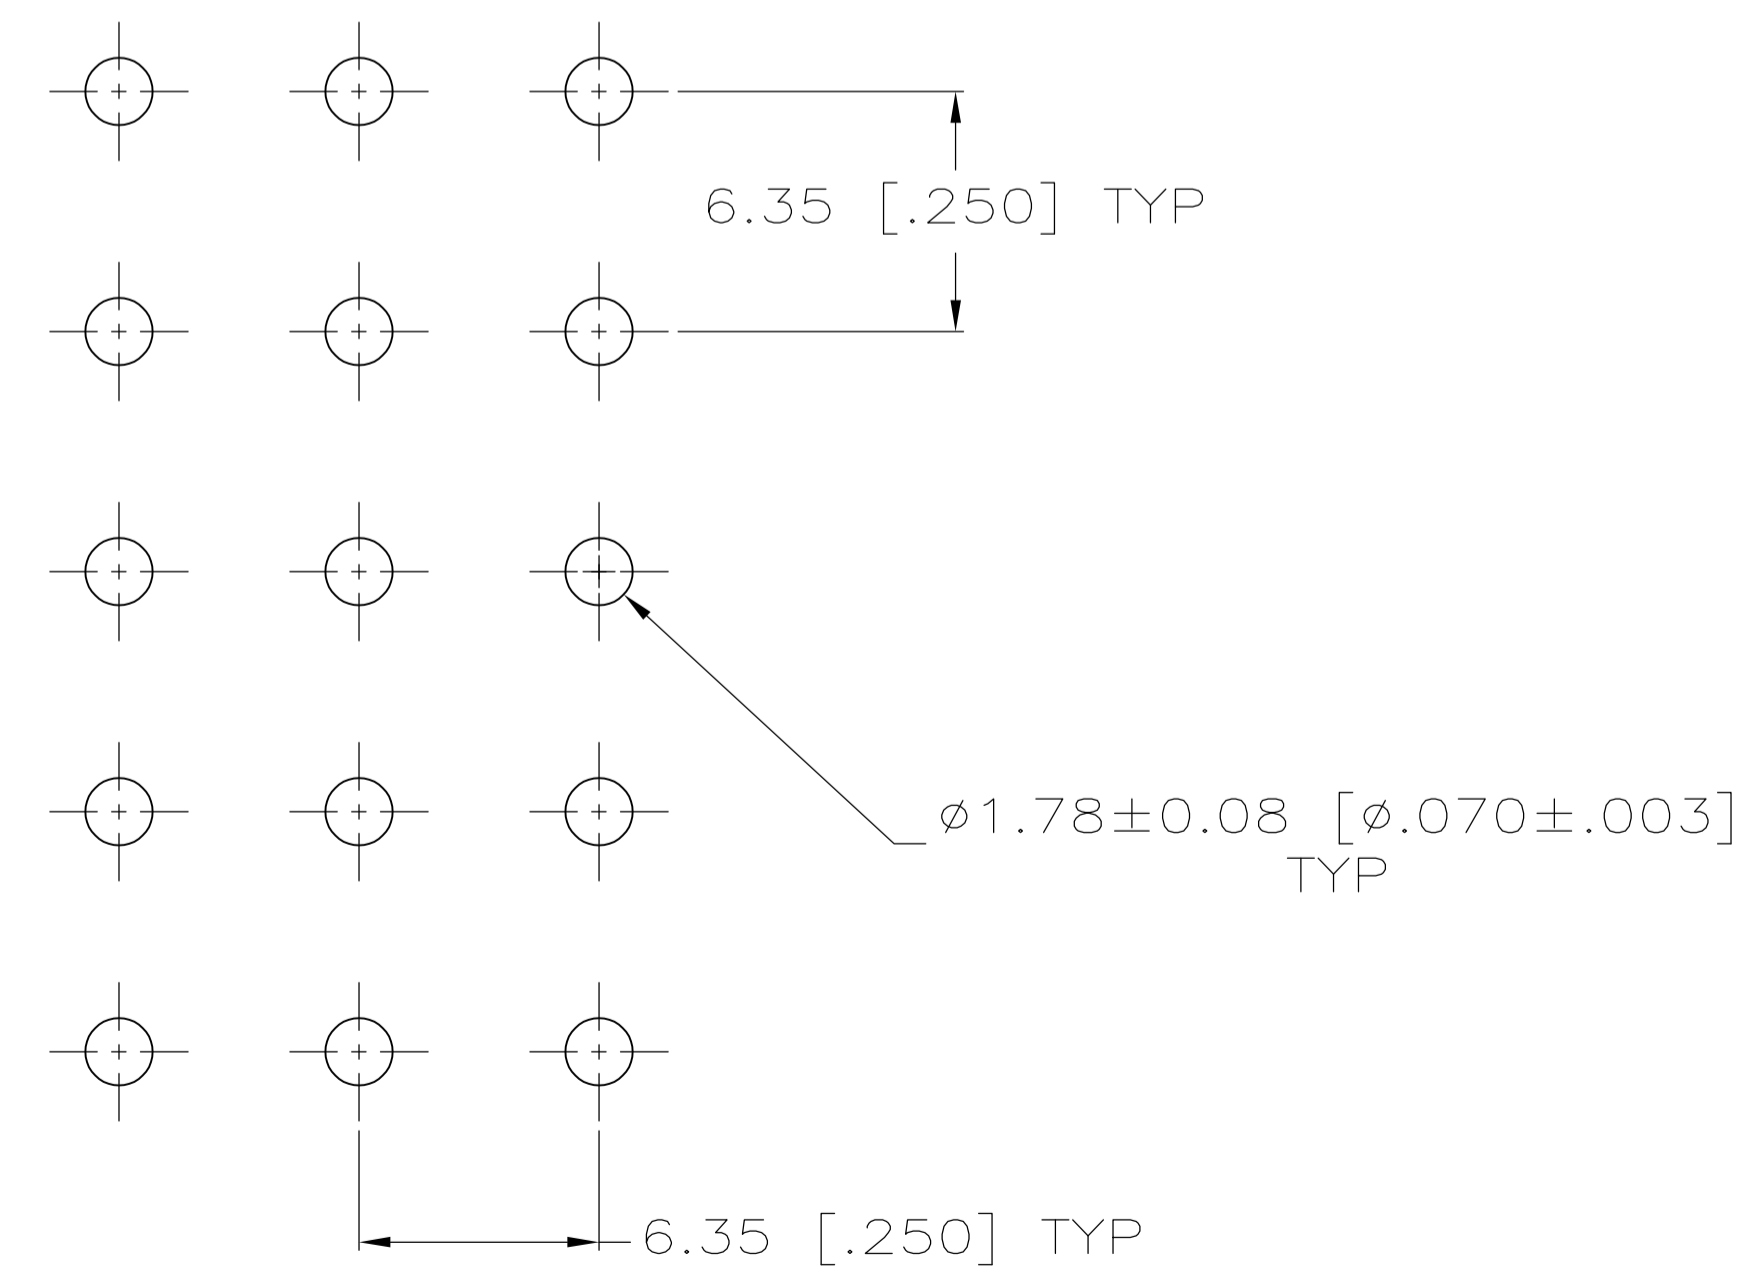
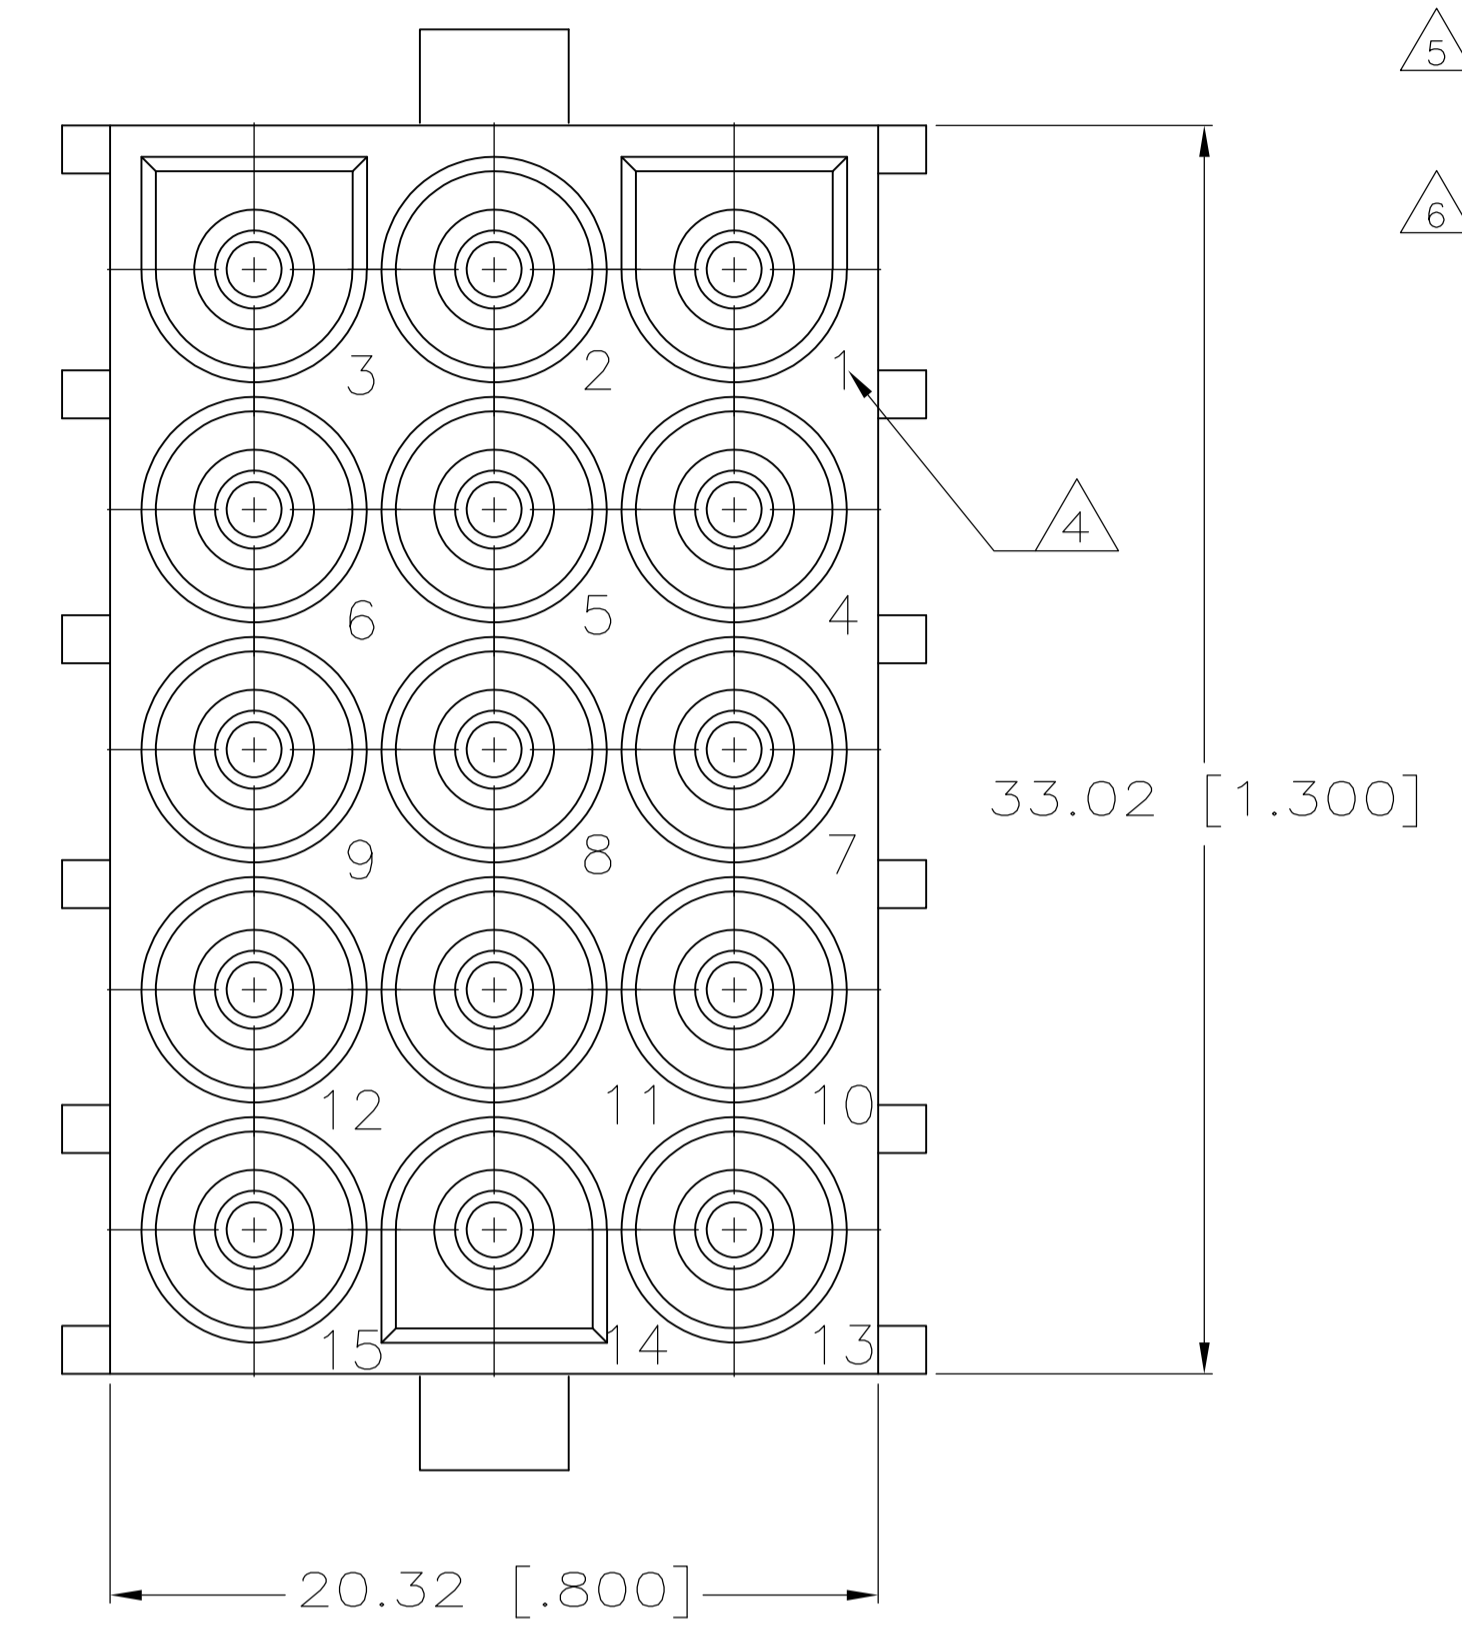


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD
CM	00				
P1		REVISED PER ECR-12-011660	28JAN13	KH	TM

- 1 PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- 2 CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- 4 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 5 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 6 SUPERSEDED BY 350830-4

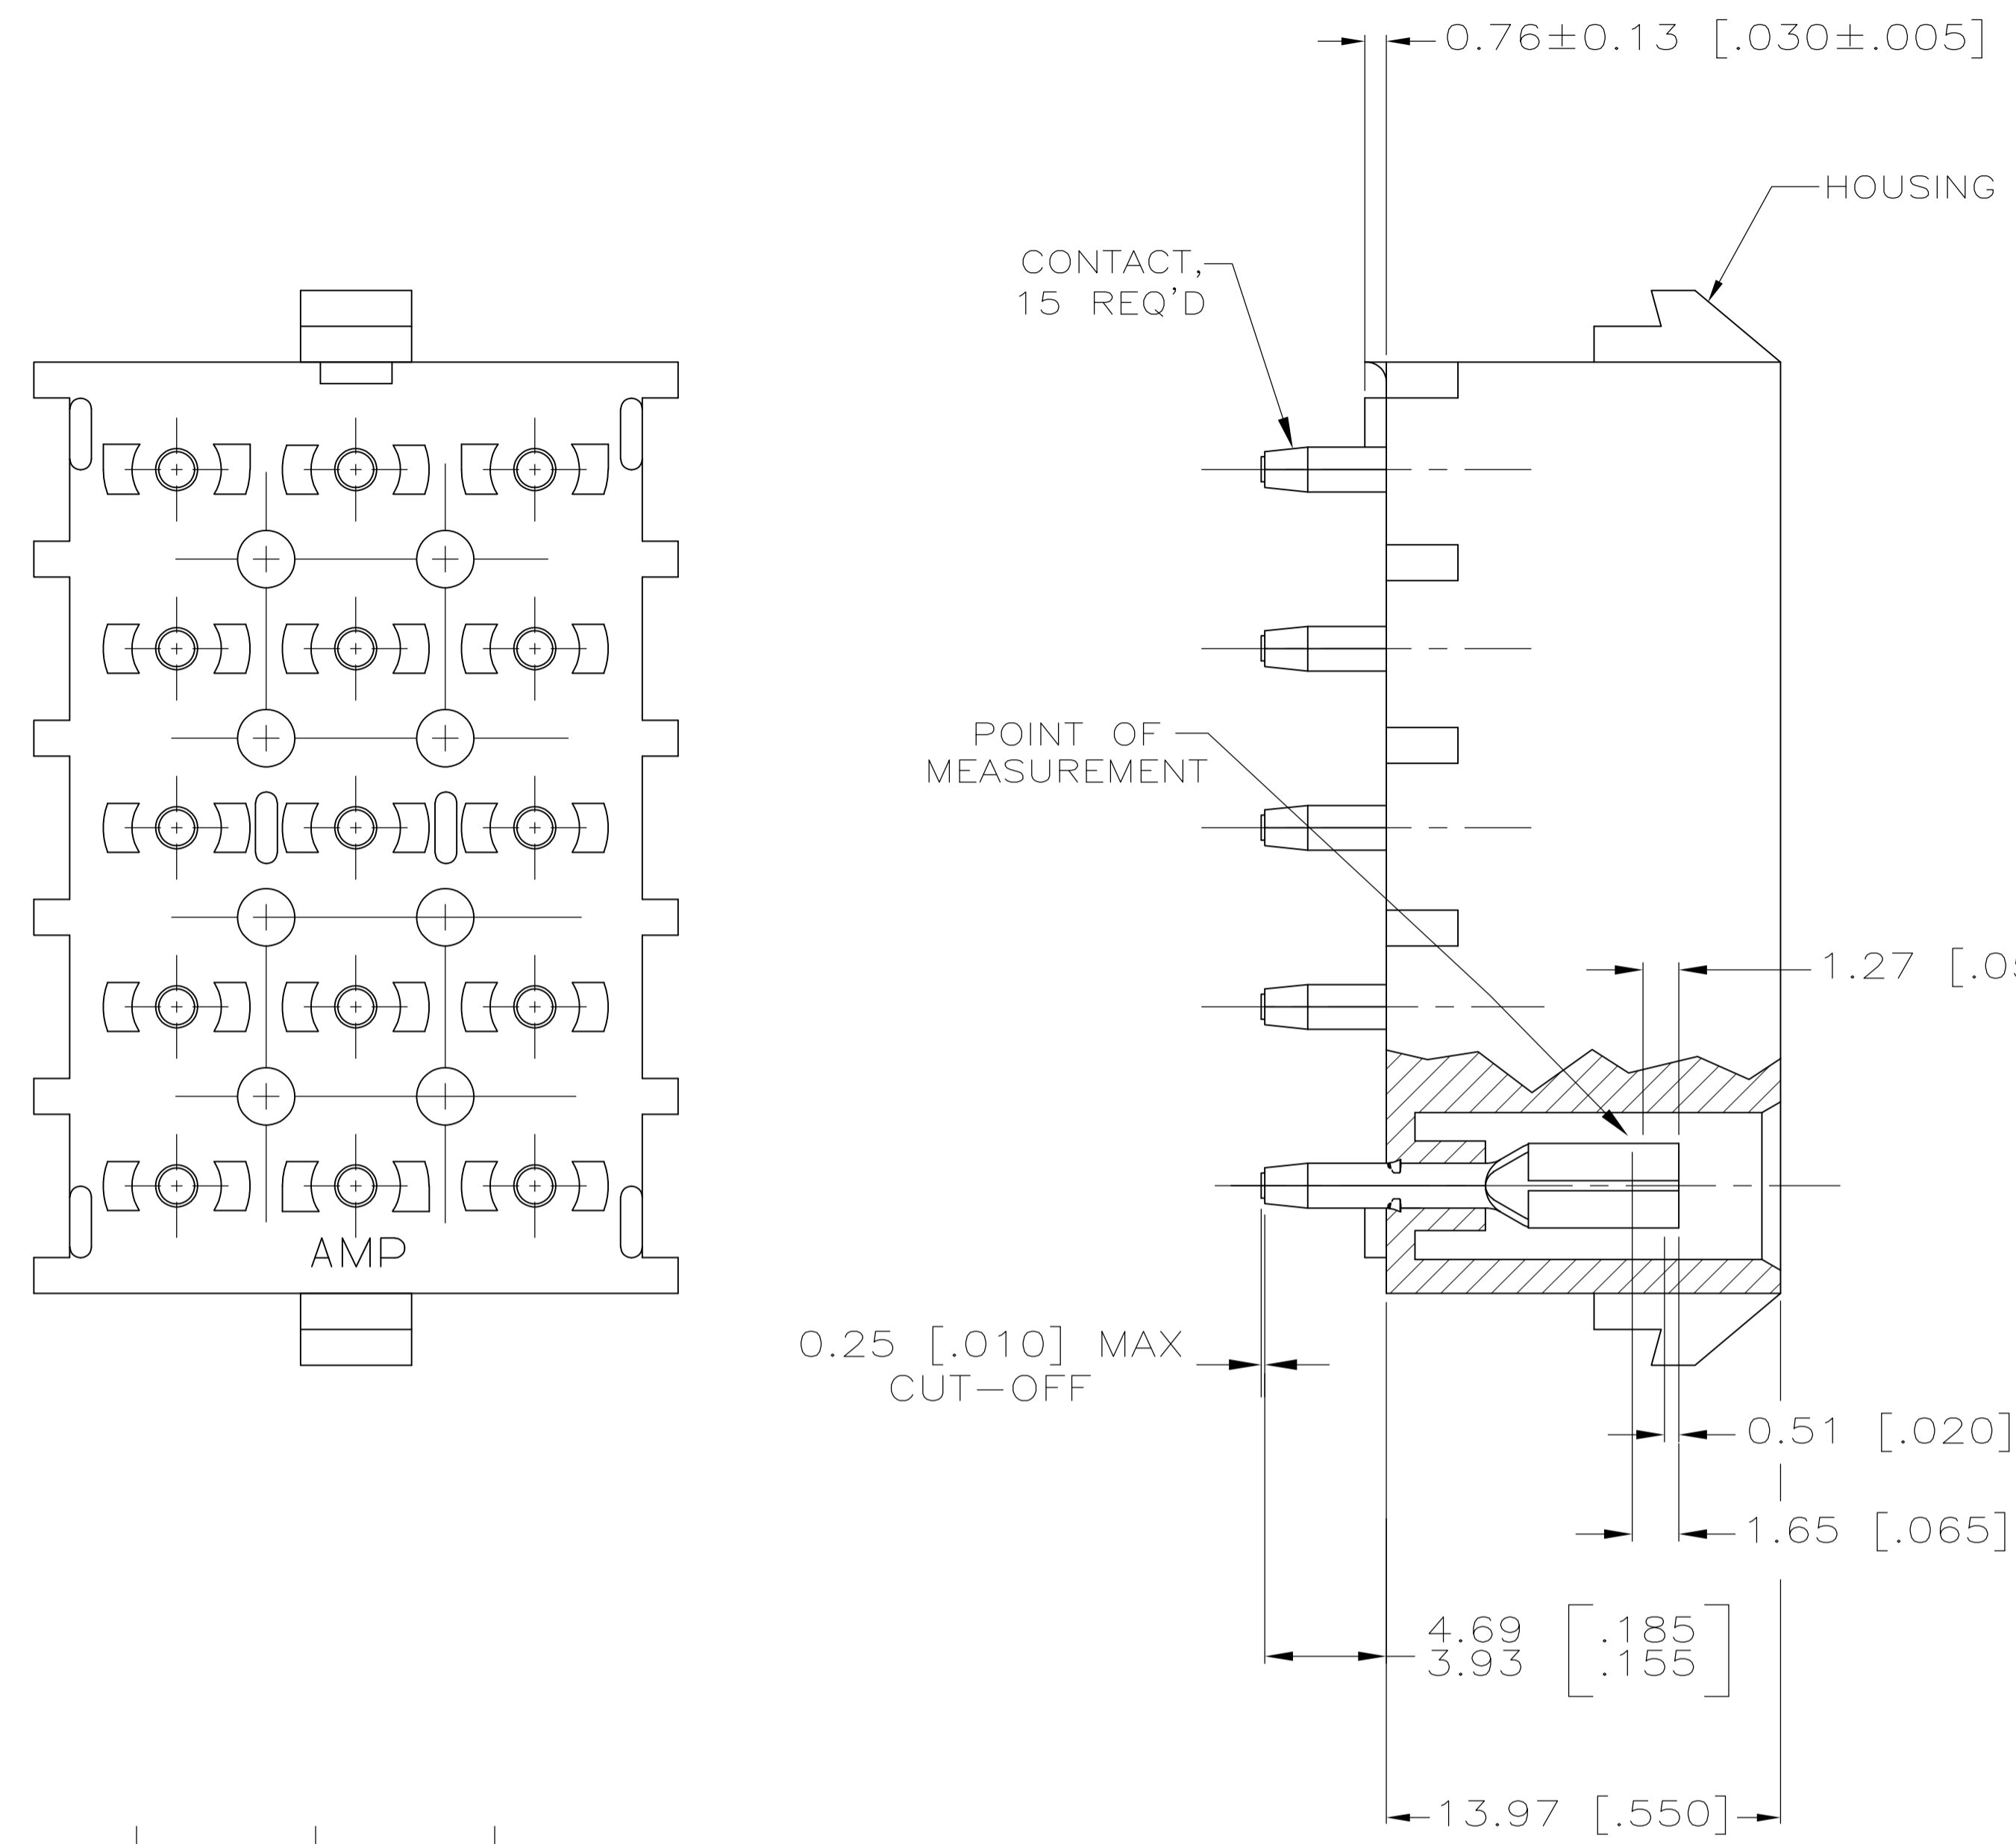

RECOMMENDED LAYOUT FOR 1.58 [.062] THICK PC BOARD

PH BRZ GOLD $\Delta 5$	NYLON, UL94V-0	350830-4
PH BRZ GOLD $\Delta 2$	NYLON, UL94V-0	350830-2
PH BRZ TIN	NYLON, UL94V-0	350830-1
CONTACT	HOUSING	PART NO

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED:		NAME:	
mm	[INCHES]	0. PLC	±	DIN	K. WHITAKER	11OCT2005	TE Connectivity
		1. PLC	±	CHK	S. RIDGILL	11OCT2005	
		2. PLC	±	APVD	S. RIDGILL	11OCT2005	
		3. PLC	± 0.13 [.005]	PRODUCT SPEC			
		4. PLC	±	APPLICATION SPEC			
		ANGLES	±	SIZE			
MATERIAL	SEE TABLE	FINISH	SEE TABLE	WEIGHT			
CUSTOMER DRAWING				SCALE	5:1	SHEET	1 OF 1
				DRAWING NO	A1 00779	DRAWING NO	350830
				RESTRICTED TO		REV	P1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)