
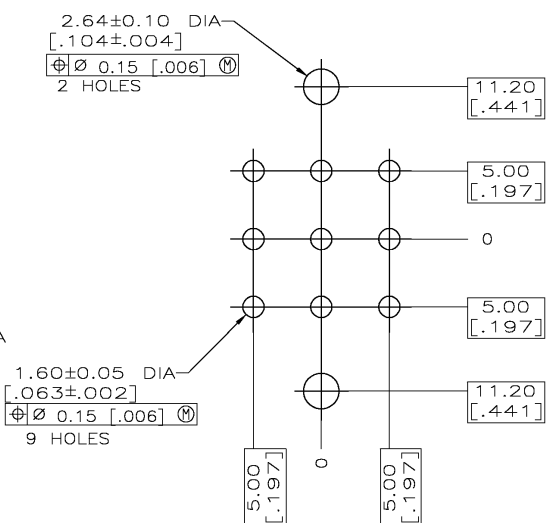
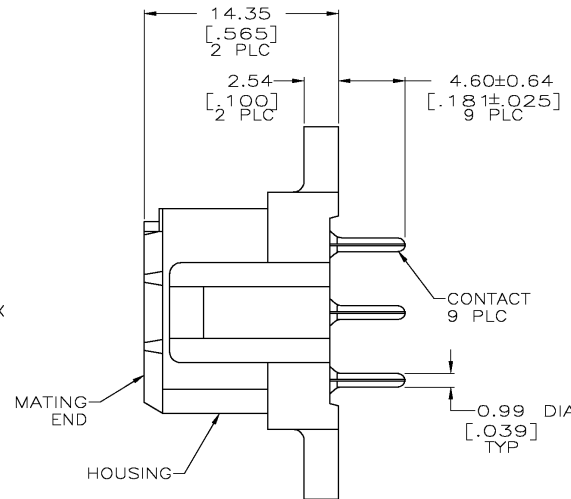


LOC	DIST	REVISIONS			
P	LT/R	DESCRIPTION	DATE	DNW	APVD
BD	39	L	OG3B-0390-03	08MAY03	TK GS

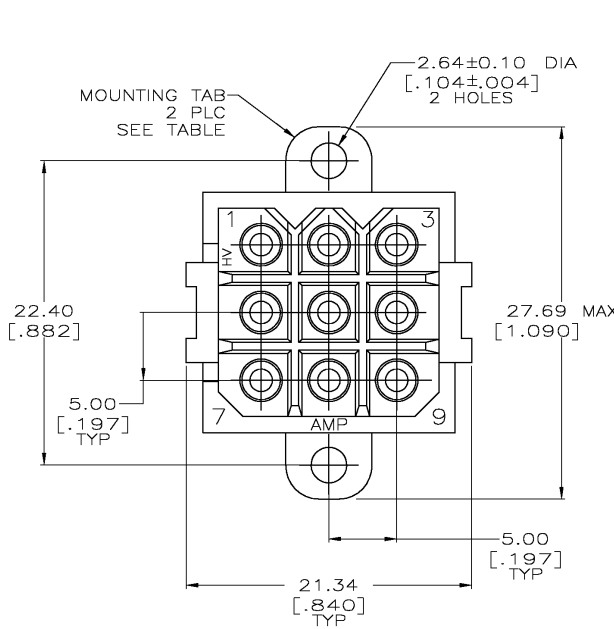

RECOMMENDED LAYOUT

- ▲ NYLON, UL 94-VO RATED, RED.
- ▲ PHOSPHOR BRONZE.
- ▲ 3.81µm [.000150] MIN TIN-LEAD OVER 1.27µm [.000050] MIN NICKEL.
- ▲ 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81µm [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- ▲ 3.81µm [.000150] MIN LEAD FREE TIN OVER 1.27µm [.000050] MIN NICKEL.

CONTACT FINISH	MOUNTING TABS	PART NO
▲	NO	207526-8
▲	YES	207526-7
▲	NO	207526-4
▲	YES	207526-3
▲	NO	207526-2
▲	YES	207526-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DNW L/SIPE 03/20/92. GWR R/STONE 3-25-92. Tyco Electronics Corporation Harrisburg, Pa.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC: 108-10033	APPLICATION SPEC
0 PLC ± -	1 PLC ± -	2 PLC ± 0.25 [010]	3 PLC ± -
4 PLC ± -	ANGLES ± -	SIZE: A2	
MATERIAL: HOUSING: 1	CONTACT: SEE TABLE	WEIGHT: -	RESTRICTED TO: -
CUSTOMER DRAWING		SCALE: 4:1	SHEET 1 OF 1 REV L

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)