

DESCRIPTION	11-21-90	REV
C. Weathers		3

SAFETY ORGANIZATION(S).

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL RECOGNIZED
CSA CERTIFIED

UL 1283
CSA 22.2 NO. 0, 0.4, 8

OPERATING SPECIFICATIONS.

LINE VOLTAGE/CURRENT:
45 OR 60 AMP., 250VAC PHASE/NEUTRAL-GND
45 OR 60 AMP., 440VAC PHASE/PHASE
50-60HZ

LINE FREQUENCY:
1.4mA @ 120V 60HZ
3.4mA @ 250V 50HZ

MAX. CASE RISE @ RATED CURRENT: 40°C
MAX. LEAKAGE CURRENT, EACH LINE TO GROUND
-10°C TO +40°C @ RATED CURRENT, I_r

IN AN AMBIENT, T_a, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_o, IS AS FOLLOWS:
 $I_o = I_r \sqrt{\frac{85 - T_a}{45}}$

RELIABILITY SPECIFICATIONS.

STORAGE TEMPERATURE:
-25°C TO +85°C
HUMIDITY:
21 DAYS @ 40°C 95% RH

TEST SPECIFICATIONS.

INDUCTANCE:
45A = 2.22mH NOMINAL
60A = 1.48mH NOMINAL
GROUND CHOKES:
45A = .261mH NOMINAL
60A = .242mH NOMINAL
CAPACITANCE: (MEASURED @ 1 KHZ, 0.25 VAC MAX., 25°C ±1°C)
.026µF ±20%
4.47µF ±20%
PHASE TO NEUTRAL:
DISCHARGE RESISTOR:
73.3K OHMS
LINE/GROUND AND LINE/LINE
INSULATION RESISTANCE
(W/O DISCHARGE RESISTOR)
6000 MΩ (MIN) AT 100 VDC
20°C AND 50% RH
RECOMMENDED RECEIVING INSPECTION HIPOTEST:
PHASE/NEUTRAL TO GROUND:
1500 VAC FOR 1 MINUTE
1450 VDC FOR 1 MINUTE
PHASE TO NEUTRAL:

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES ±1°
ENGLISH: ±.030
METRIC: ±

MATERIAL: AS SUPPLIED


FINISH:



LIBERTYVILLE, IL 60048


POWER LINE FILTER

SCALE	DRG. NO.	REV.
NTS	4-25-89	3
DESIGNATOR	45AY16C & 60AY16C	
LJD	CFW	

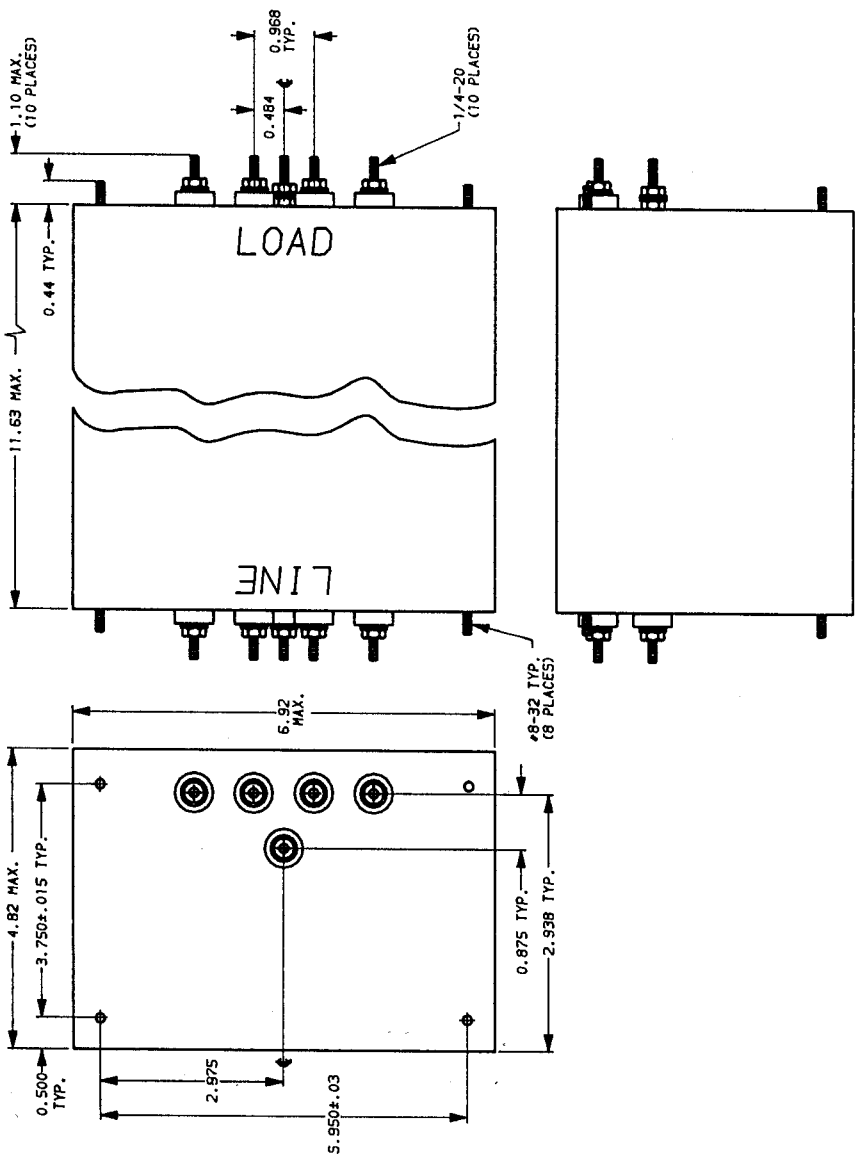

NOTES:

1.) LINE SIDE HAS INSULATED GROUND TERMINAL.

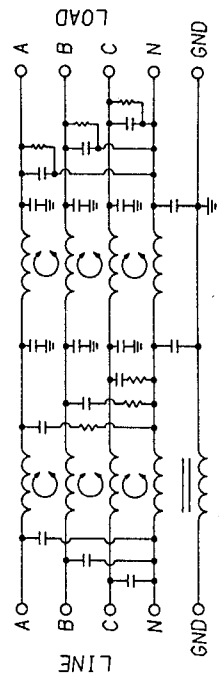

NOTE: COMMON MODE A-B-C & N SHORTED TOGETHER. DIFF. MODE MEASURED N TO A-B-C SHORTED TOGETHER.

50Ω - 50Ω (MINIMUM) INSERTION LOSS							
FREQUENCY MHz	.05	.15	.5	1.0	5.0	10.0	30.0
COMMON 45A	15	43	75	75	75	75	50
60A	12	46	75	75	75	70	45
DIFF. 45A	14	50	75	75	75	75	65
60A	26	58	75	75	75	75	60

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)