
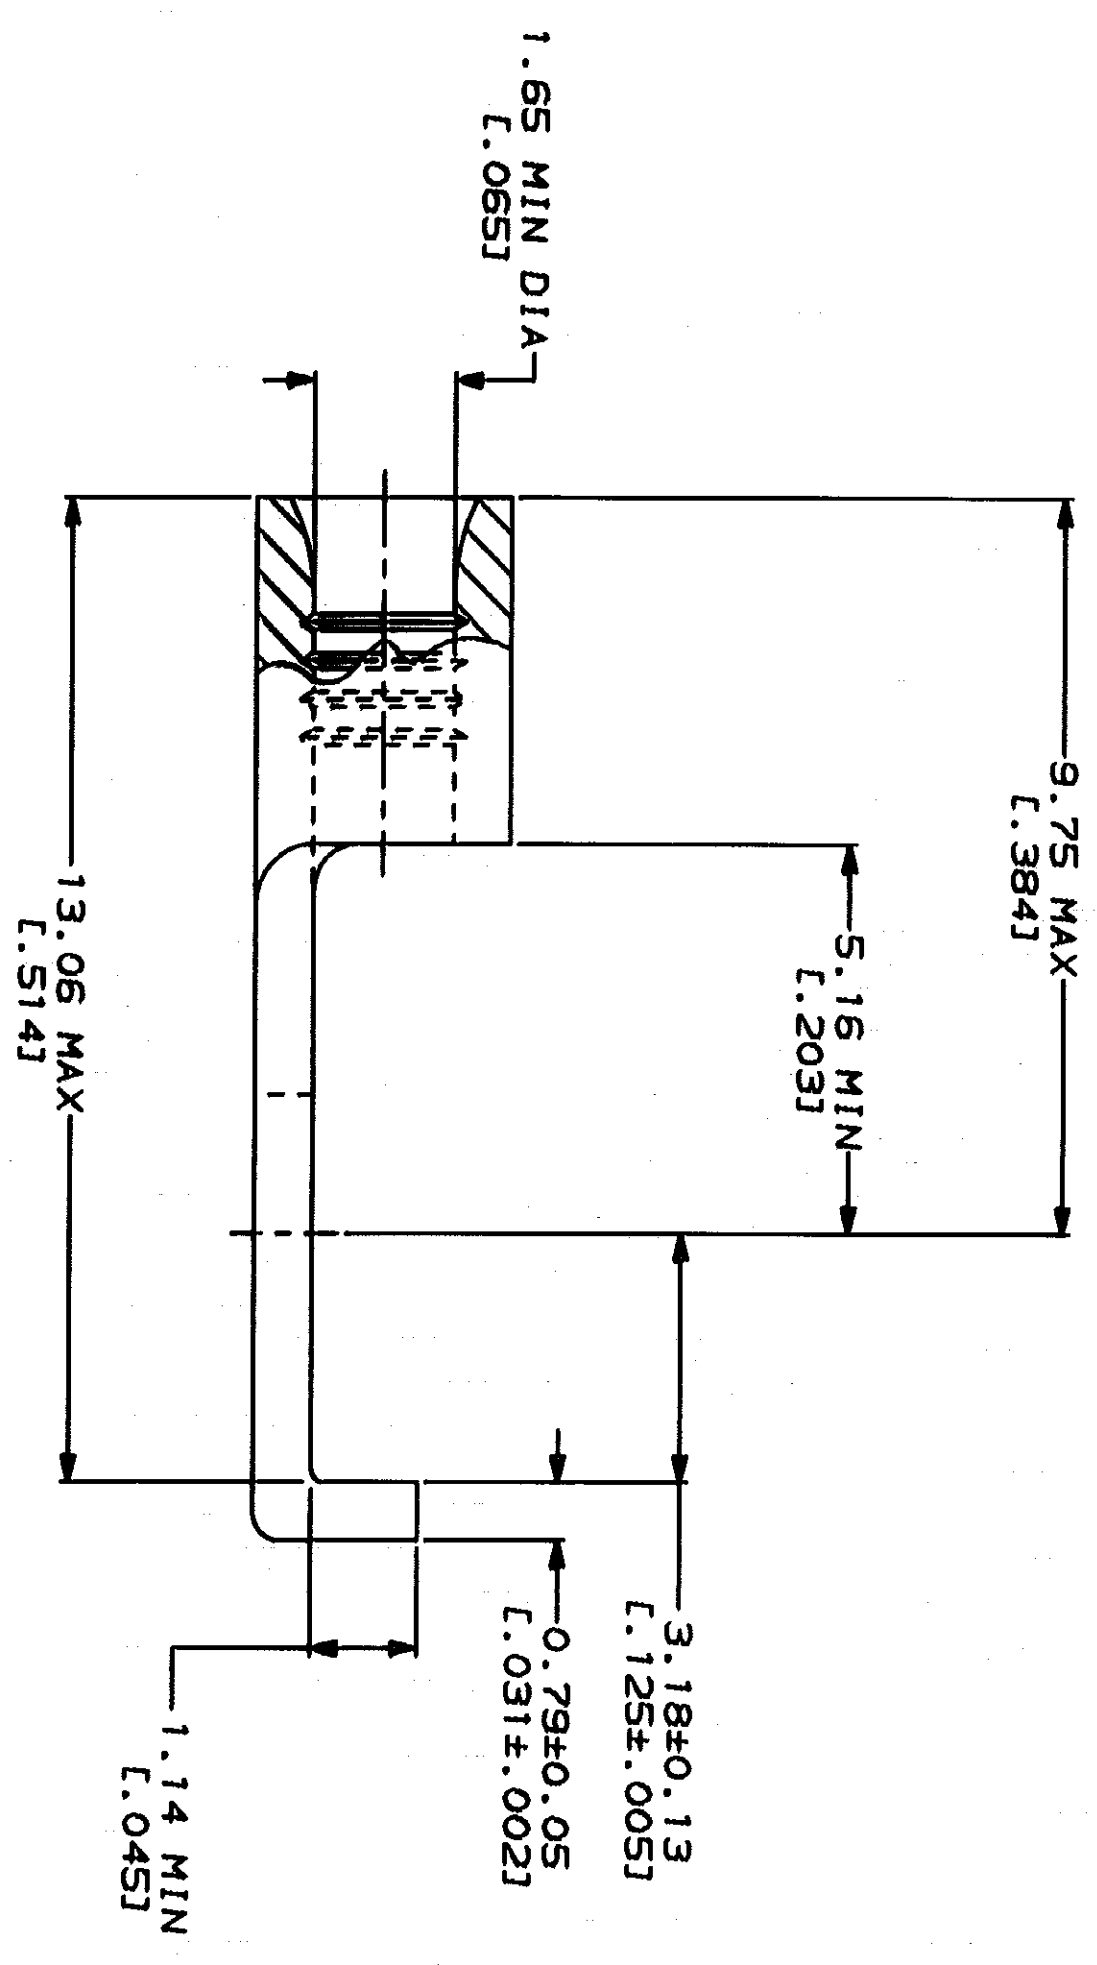


AMP WIRE RANGE	E13288 Listed
22-16 AWG STRANDED	22-16 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

STAMP AMP 22-18* APPROX AS SHOWN
 22-16 TERMINALS ARE STAMPED 22-18 IN ACCORDANCE WITH MILITARY SPECIFICATION MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

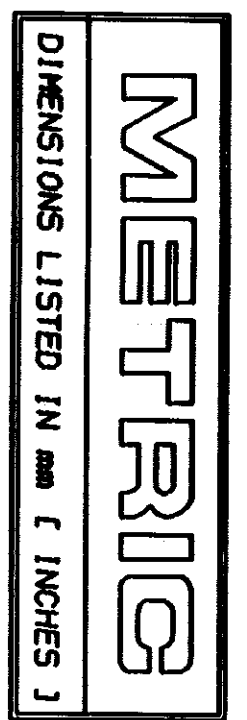

QUANTITY	STUD SIZE	H	PACKAGING TYPE	PART NO
5000	8	4.34±0.08 [L.171±.003J]	1-32418-2 ON TAPE	1-32418-4
---	8	4.34±0.08 [L.171±.003J]	LOOSE PIECE	1-32418-2
---	6	3.68±0.08 [L.145±.003J]	LOOSE PIECE	32418

AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
 1-800-522-6752

FOR APPLICATION TOOLING INFORMATION
 1-800-722-1111

FOR ORDER ENTRY
 1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX

VOLTAGE RATING: NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm² [509-3,260] CIR MILS STRANDED

FINISH: TIN PLATE
 0.00254L [0.00100] MIN THK PER MIL-T-10727

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN - - - - - (DIMENSIONS IN - - - - -) TOLERANCES ON: 1 2 PLC DEC ± 3 PLC DEC ± ANGLES

MATERIAL: COPPER PER ASTM B-152 ANNEALED

DR 3-2-93 TA BRINKMAN
 CHK 3-2-93 DA PATTERSON
 APPD 3-2-93 DE MILLER
 APPD 3-2-93 JL NECKLEY
 PRODUCT SPEC

APPLICATION SPEC

AMP Incorporated
 Harrisburg, PA 17105-3508

TERMINAL, FLANGED SPADE, BUDGET

SIZE: 00779
 CAGE CODE: 00779
 DRAWING NO: 32418

SCALE: 10:1
 SHEET: 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)