


REV A DRC26-50S\*\*

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. A14643	12/5/94	RDR
A	REVISED PER E.O. P16752	7-20-00	RDR

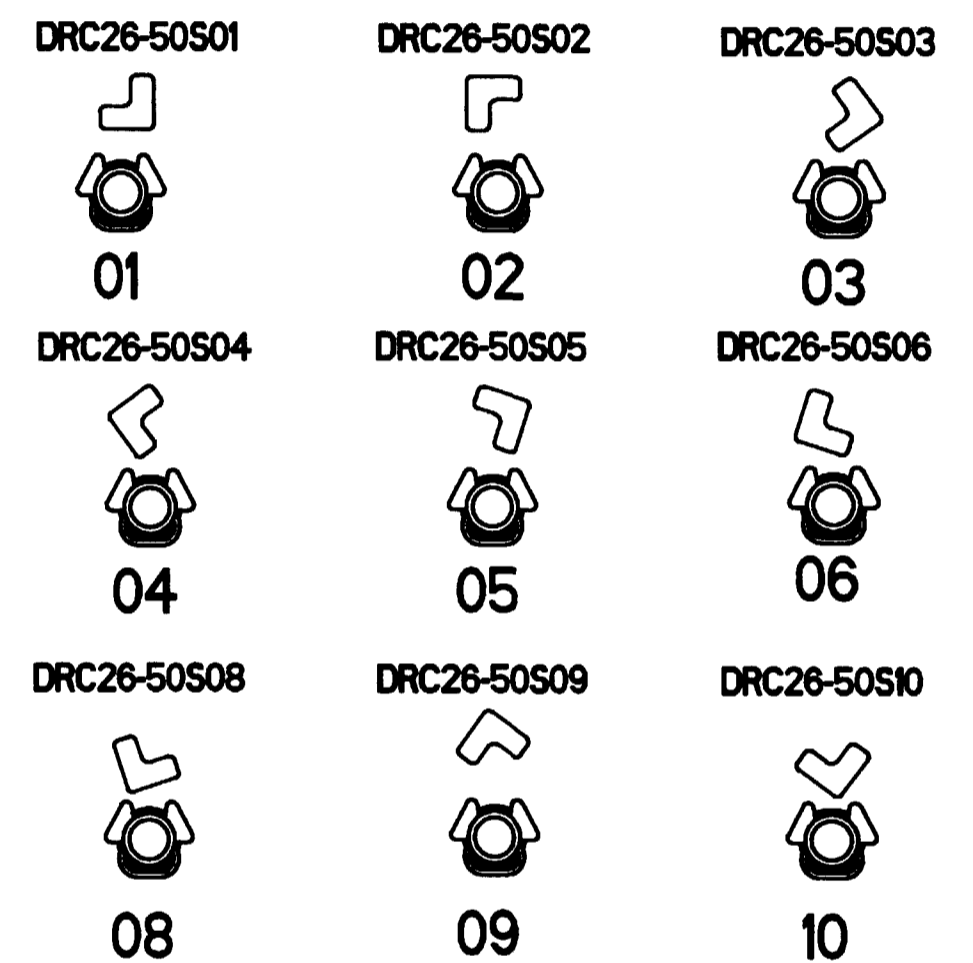

- SEE KEY ORIENTATION
- RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16NM]
  - THIS CONNECTOR WILL ACCOMMODATE THE FOLLOWING:

CONTACT SIZE	MIN. O.D.	MAX. O.D.	WIRE GAUGE RANGE REF ONLY
20	.040 [1.016]	.095 [2.413]	16 THRU 20 [1.00-.50mm <sup>2</sup> ]

- PLUG IS SUPPLIED WITH DUST CAP. (NOT SHOWN)
  - DIMENSION TOLERANCE: ±.025 [.64]
- NOTES: 1. DIMENSIONS ARE IN INCHES [mm].

- MATERIAL: HOUSING: PLASTIC (BLACK); BOLT: STAINLESS STEEL; CLIP: STEEL.
- THIS PLUG MATES WITH 09D41107L01 THRU 10-\*\*\*\* AND DRC20-50P01 THRU 10-\*\*\*\* RECEPTACLE. (\*\*\*\* = ALL MODIFICATIONS)
- FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.

SIGNATURE & DATE		PLUG 50 CONTACTS, SIZE 20 DRC SERIES	CP EP019	MATL. CODE
DR	V. TOMSA 10/11/94		The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
CHK	D. Meyer 7/20/00	ENVELOPE	DRC26-50S**	
PE	D. Meyer 7/20/00		DWG SIZE	CODE 11139
APPD	R. Reed 7-20-00			
SCALE	NONE WT			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)