


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	T	EC 0G3C 0734 04		17DEC04	BSV	JLG	
	T1	REVISED PER ECO-09-020932		25AUG09	KK	AEG	

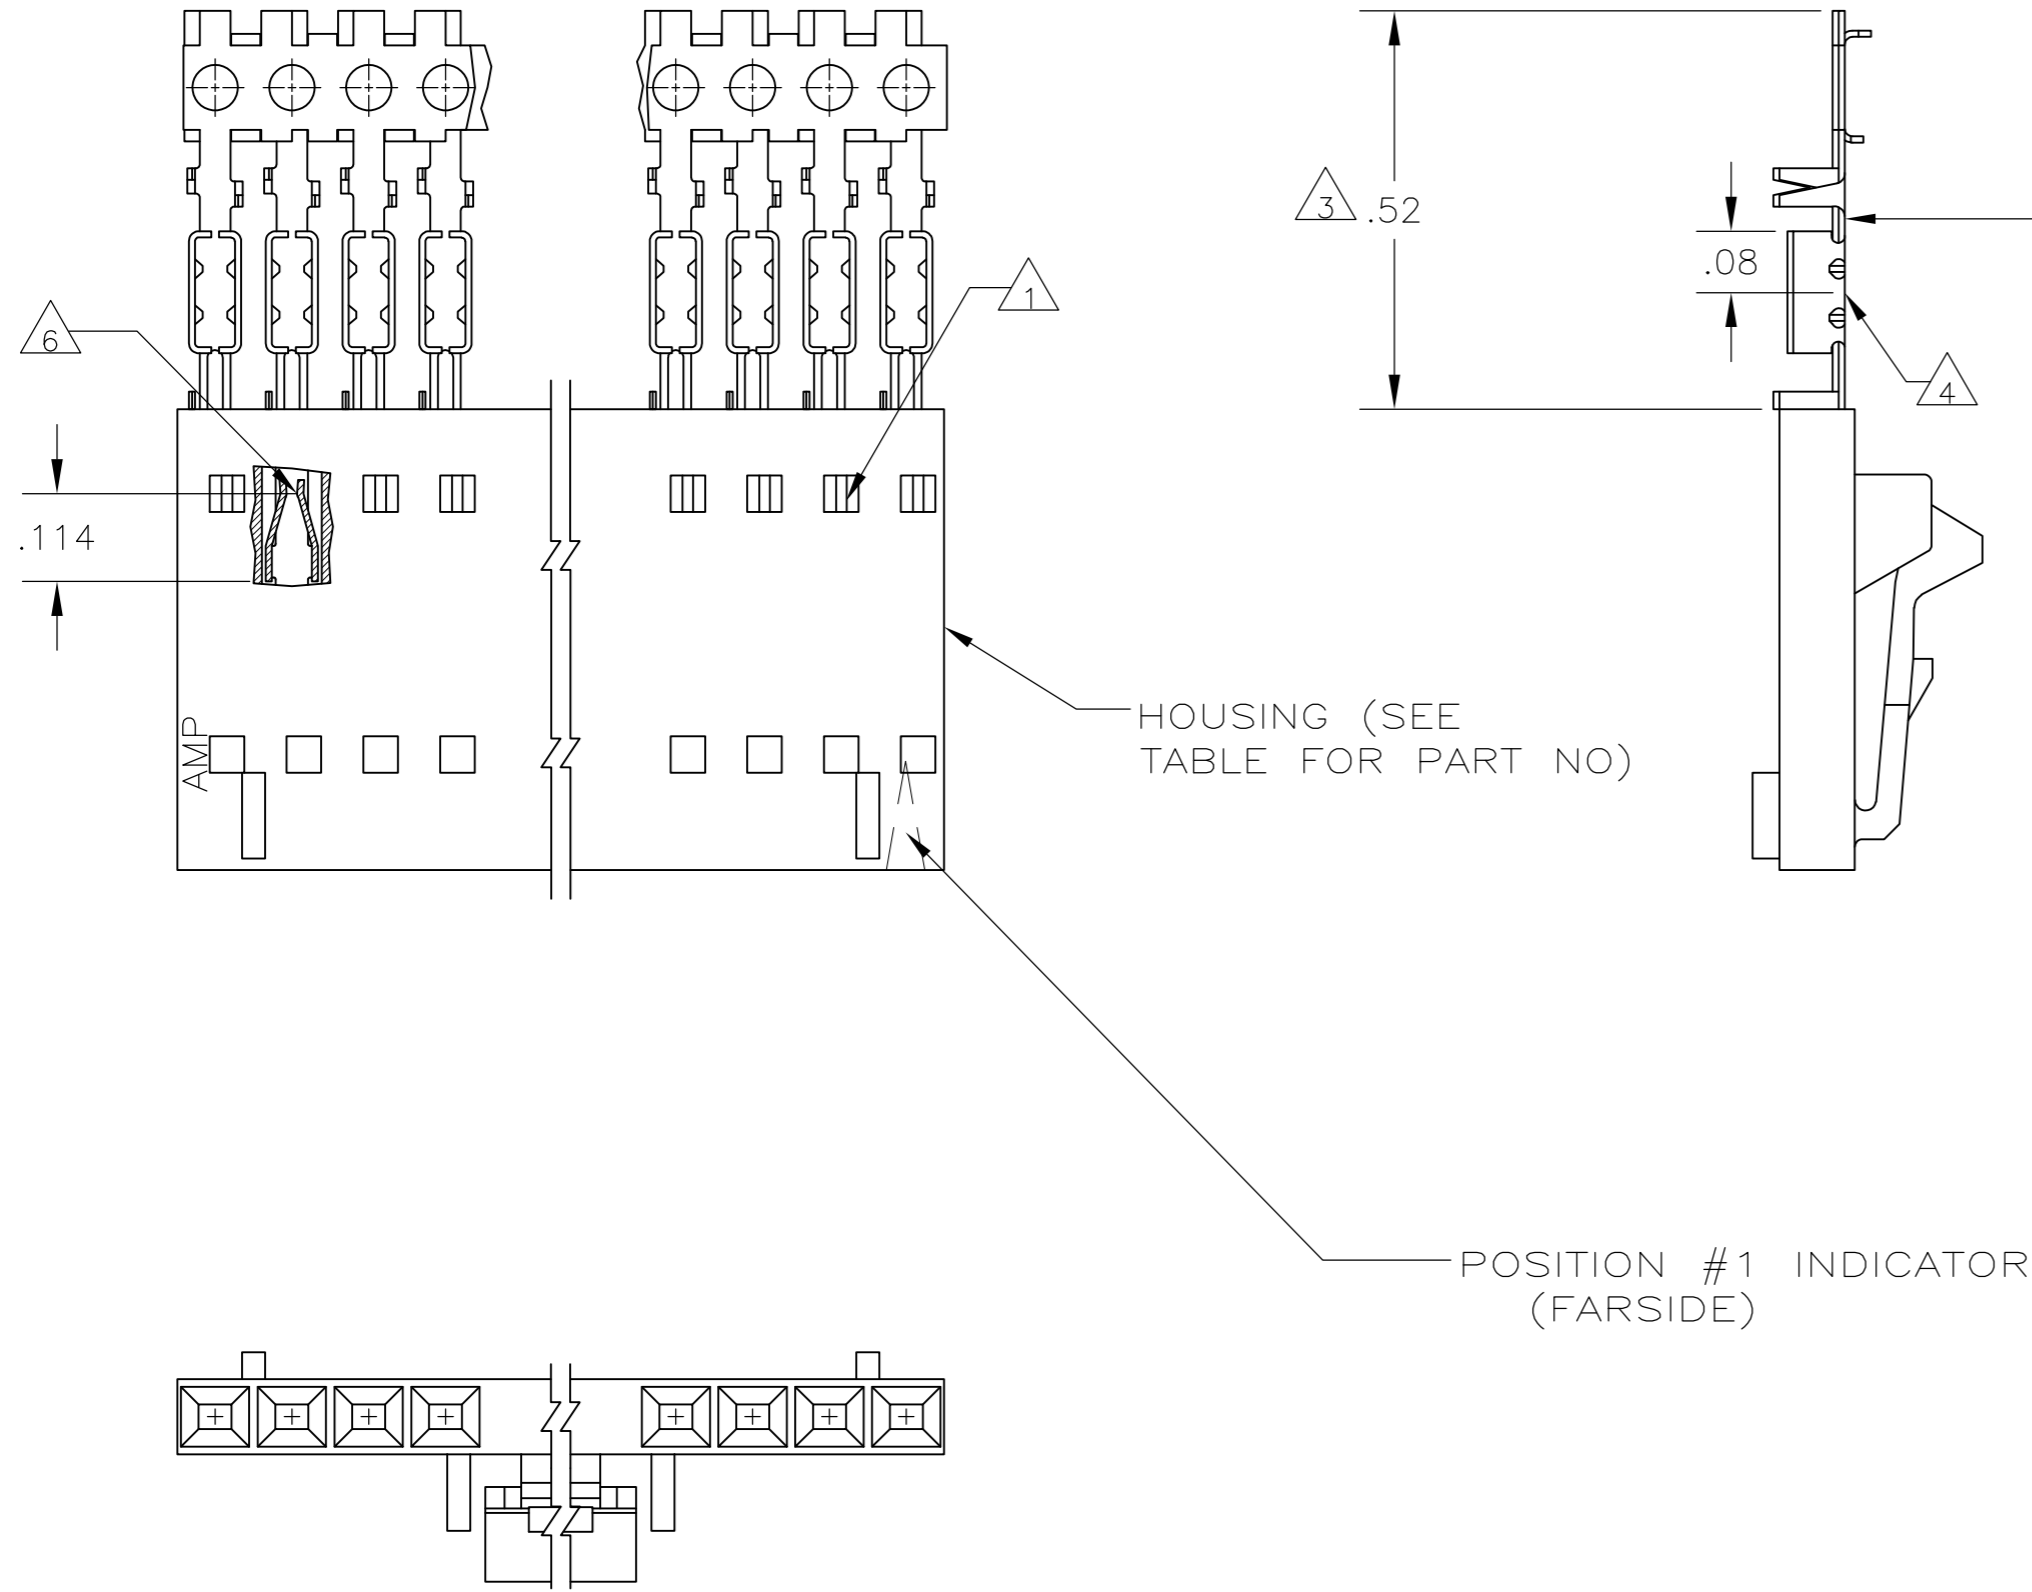

CONTACT IDENTIFICATION LETTER "A" (LOCATED IN THIS AREA)

9	8		25	7-103640-4	
OBSOLETE	8	2-104257-4	25	7-103640-4	
OBSOLETE	8	2-104257-3	24	7-103640-3	
OBSOLETE	8	2-104257-2	23	7-103640-2	
OBSOLETE	8	2-104257-1	22	7-103640-1	
OBSOLETE	8	2-104257-0	21	7-103640-0	
OBSOLETE	8	1-104257-9	20	6-103640-9	
OBSOLETE	8	1-104257-8	19	6-103640-8	
OBSOLETE	8	1-104257-7	18	6-103640-7	
OBSOLETE	8	1-104257-6	17	6-103640-6	
OBSOLETE	8	1-104257-5	16	6-103640-5	
OBSOLETE	8	1-104257-4	15	6-103640-4	
OBSOLETE	8	1-104257-3	14	6-103640-3	
OBSOLETE	8	1-104257-2	13	6-103640-2	
OBSOLETE	7	2-104257-4	25	2-103640-4	
OBSOLETE	7	2-104257-3	24	2-103640-3	
OBSOLETE	7	2-104257-2	23	2-103640-2	
SUPERSEDED	7	2-104257-1	22	2-103640-1	
OBSOLETE	7	2-104257-0	21	2-103640-0	
OBSOLETE	7	1-104257-9	20	1-103640-9	
OBSOLETE	7	1-104257-8	19	1-103640-8	
OBSOLETE	7	1-104257-7	18	1-103640-7	
OBSOLETE	7	1-104257-6	17	1-103640-6	
OBSOLETE	7	1-104257-5	16	1-103640-5	
SUPERSEDED	7	1-104257-4	15	1-103640-4	
OBSOLETE	7	1-104257-3	14	1-103640-3	
OBSOLETE	7	1-104257-2	13	1-103640-2	
SUPERSEDED BY 1-103960-1		1-104257-1	12	1-103640-1	
SUPERSEDED BY 1-103960-0		1-104257-0	11	1-103640-0	
SUPERSEDED BY 103960-9		104257-9	10	103640-9	
SUPERSEDED BY 103960-8		104257-8	9	103640-8	
SUPERSEDED BY 103960-7		104257-7	8	103640-7	
SUPERSEDED BY 103960-6		104257-6	7	103640-6	
SUPERSEDED BY 103960-5		104257-5	6	103640-5	
SUPERSEDED BY 103960-4		104257-4	5	103640-4	
SUPERSEDED BY 103960-3		104257-3	4	103640-3	
SUPERSEDED BY 103960-2		104257-2	3	103640-2	
SUPERSEDED BY 103960-1		104257-1	2	103640-1	
		PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103960
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11-4-86 L A MAYER	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK 11-12-86 P de Jong	NAME RCPT ASSY, AMPMODU MTE, SINGLE, LATCHED & POLARIZED, FOR #26-#30 AWG WIRE SIZE	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± -		APVD 11-12-86 P de Jong	PRODUCT SPEC 108-25034	
MATERIAL: HOUSING-FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS- PHOS BRONZE		FINISH SEE TABLE	APPLICATION SPEC 114-25026	RESTRICTED TO -
		WEIGHT -	SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C=103640	SCALE 4:1 SHEET 1 of 1 REV T1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)