


# SPECIFICATION CONTROL DRAWING

81A1122

TITLE	TWO CONDUCTOR CABLE, SHIELDED, JACKETED, FLEXIBLE	Date	1-24-96	Revision	A
-------	---	------	---------	----------	---

This specification sheet forms a part of the latest issue of Raychem Specification 80.

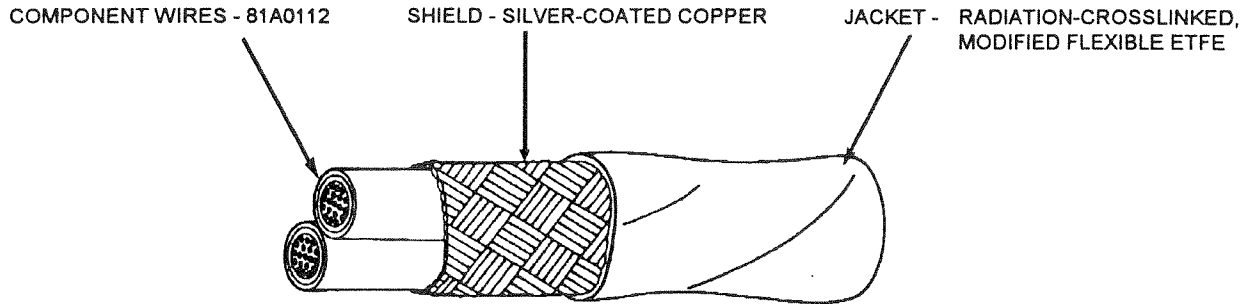

### CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
81A1122-26*	26	38	.006	.009	.097	.102	8.0
81A1122-24*	24	38	.006	.009	.107	.112	9.9
81A1122-22*	22	38	.007	.010	.121	.127	13.0
81A1122-20*	20	38	.007	.010	.139	.146	17.5
81A1122-18*	18	38	.007	.011	.161	.169	24.3
81A1122-16*	16	38	.008	.012	.177	.186	29.6
81A1122-14*	14	38	.009	.013	.209	.219	41.9

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

**TEMPERATURE RATING: 150°C**

Maximum continuous conductor temperature

**VOLTAGE RATING: 600 volts (rms)**

**BLOCKING: 150°C ± 3°C for 6 hours**

**CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour**

**DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz**

**FLAMMABILITY: Procedure 1, 3 seconds (maximum); 3 inch (maximum)**

**JACKET COLOR: White preferred**

**JACKET ELONGATION AND TENSILE STRENGTH:**

Elongation, 100% (minimum)

Tensile Strength, 3000 lbf/in<sup>2</sup> (minimum)

**JACKET FLAWS:**

Spark Test, 1500 volts (rms), 60 Hz, 100% test or Impulse Dielectric Test, 6.0 kV (peak), 100% test

**LOW TEMPERATURE-COLD BEND: -65 ± 3°C**

**SECANT MODULUS: 4.0 X 10<sup>4</sup> lbf/in<sup>2</sup> (maximum), 2% strain, 2 in. Jaw separation, 0.2 in./minute, procedural reference ASTM D 882**

**SHIELD COVERAGE: 85% (minimum)**

**VOLTAGE WITHSTAND (POST ENVIRONMENTAL): 1000 volts (rms), 60 Hz, 1 minute**

**PART NUMBER**

The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 14, white and black component wires; white jacket: 81A1122-14-9/0-9

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

**Raychem**

Raychem Corporation  
300 Constitution Drive, Menlo Park, California 94025  
1-800-2 Raychem Fax 1-415-381-8297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)