

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	29 JUL 2022	DW	CW
	A1	ECR-23-194923	30 JAN 2024	DW	CW

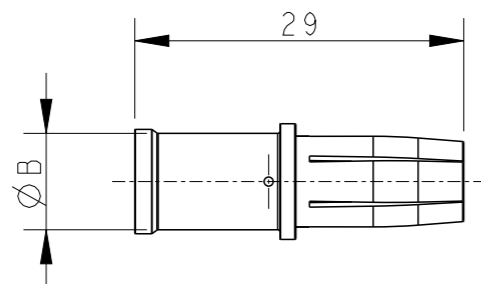

NOTES:
 1. TECHNICAL CHARACTERISTICS:
 CONTACT MATERIAL: COPPER ALLOY
 SURFACE PLATING: SILVER
 CONTACT RESISTANCE: $\leq 1.0m\Omega$
 WIRE RANGE: 4.0-16mm² (12-6 AWG)

注释:
 1. 技术参数:
 公针材料: 铜合金
 表面电镀: 镀银
 接触电阻: $\leq 1.0m\Omega$
 接线范围: 4.0-16mm² (12-6 AWG)

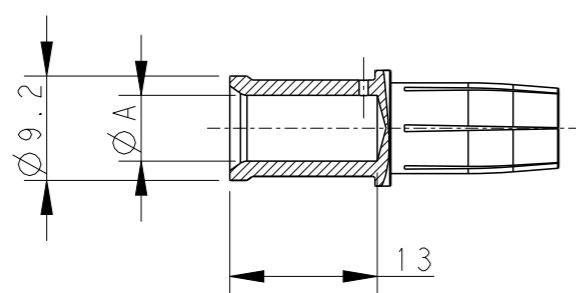

T2400032040-002	HSF-4.0	HSF-4.0, SILVER PLATING HSF母针 4.0mm ² , 镀银, 高插拔	2.85	3.85	AWG 12 (4.0mm ²)	13
T2400032100-002	HSF-10	HSF-10, SILVER PLATING HSF母针 10mm ² , 镀银, 高插拔	4.3	5.6	AWG 8 (10mm ²)	
T2400032160-002	HSF-16	HSF-16, SILVER PLATING HSF母针 16mm ² , 镀银, 高插拔	5.8	8.5	AWG 6 (16mm ²)	
PART NUMBER 料号	PART DESCRIPTION 描述		ØA	ØB	WIRE GAUGE 线规	STRIPPING LENGTH(mm) 剥线长度


THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 29 JUL 2022
DAVID WANG
 CHK 29 JUL 2022
GINO YAO
 APVD 29 JUL 2022
CHRIS WANG



DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:



0 PLC ±-
 1 PLC ±-
 2 PLC ±-
 3 PLC ±-
 4 PLC ±-
 ANGLES ±-

MATERIAL

FINISH

PRODUCT SPEC 108-137613
 APPLICATION SPEC 114-137613
 WEIGHT -

NAME
 HSF
 SS SOCKET CONTACT

SIZE A3 CAGE CODE 00779 DRAWING NO. T2400032XX0002 RESTRICTED TO -

CUSTOMER DRAWING SCALE 3:2 SHEET 1 OF 1 REV A1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)