

REV. 1
DCO 16356


COIL: @ 25°C	
RESISTANCE	540 - 770 OHMS
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	15	g's
SHOCK	100	g's	6 ± 1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 6 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

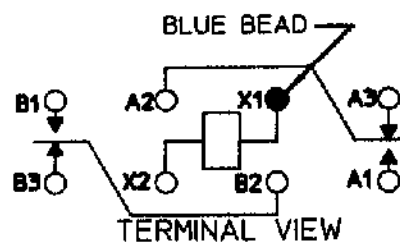

CONTACT RATING: 2A 28 VDC RESISTIVE 100,000 OPERATIONS MINIMUM

DR. PBB 5-5-00 CK. TIG 7-12-00

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M5757/10-054 REV.

"FW" RELAY

FW1201G03

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)