


| REVISIONS |                         |         |          |
|-----------|-------------------------|---------|----------|
| REV       | DESCRIPTION             | DATE    | APPROVED |
| --        | REVISED PER ECN 99-0001 | 5/13/99 | S. Mody  |

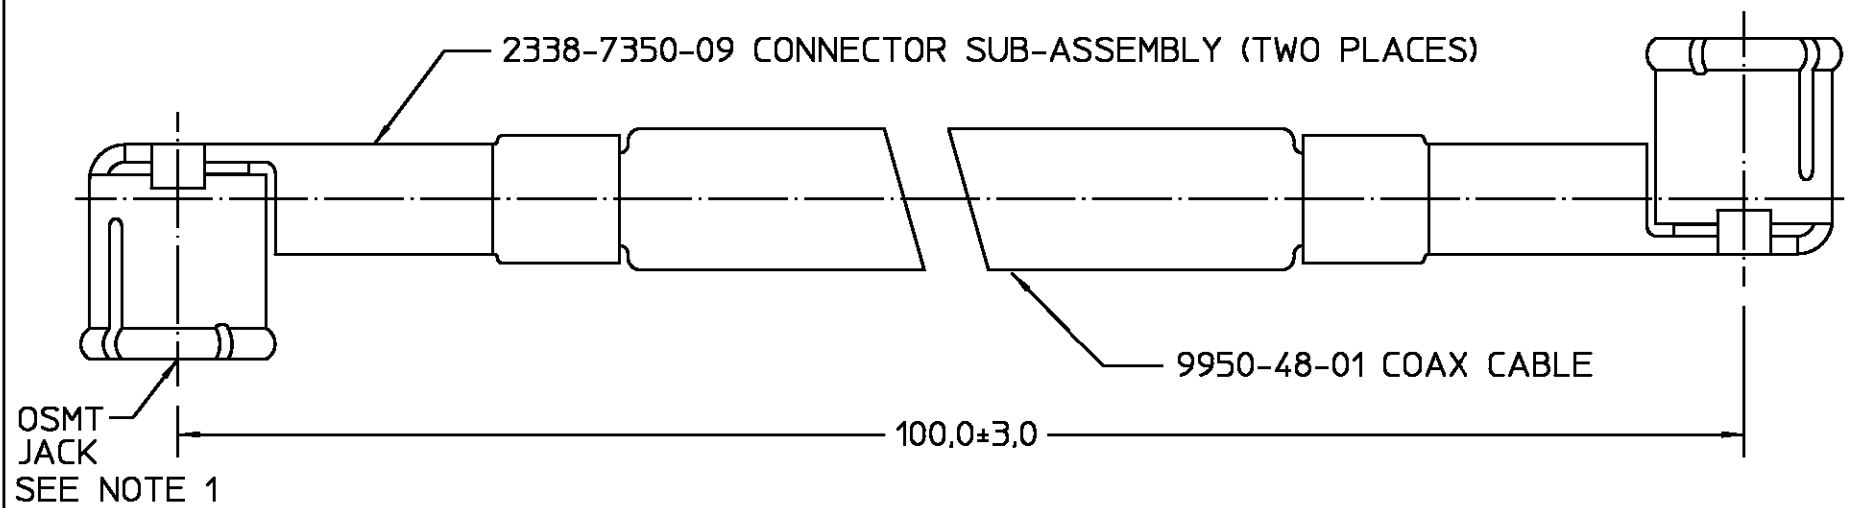

NOTES  
 1. CONNECTOR CENTERLINES SHALL BE 180° ± 30° APART AS SHOWN.

ELECTRICAL

|                                 |  |
|---------------------------------|--|
| Frequency                       | DC - 6 GHz                               |
| Nominal Impedance               | 50 ohms                                  |
| Voltage Rating                  | 250 Volts (VRMS Max.) @ Sea Level        |
| VSWR                            | 1.20:1 Max. @ 2GHz<br>1.40:1 Max. @ 6GHz |
| Insulation Resistance           | 1000 Megohms Minimum                     |
| Dielectric Withstanding Voltage | 500 Volts (VRMS Minimum) @ Sea Level     |

MECHANICAL

Connector Durability 100 mating cycles

ENVIRONMENTAL

Temperature Rating -40°C (-40°F) To +105°C (221°F)

| OUTER CONTACT    | BERYLLIUM COPPER                     | GOLD PLATE OVER NICKEL PLATE |
|------------------|--------------------------------------|------------------------------|
| CENTER CONTACT   | BERYLLIUM COPPER                     | GOLD PLATE OVER NICKEL PLATE |
| DIELECTRIC       | POLYPROPYLENE, GF                    | N/A                          |
| CABLE JACKET     | POLYVINYLCHLORIDE                    | N/A                          |
| SHIELD           | TINNED COPPER WIRE, 38 AWG           | N/A                          |
| DIELECTRIC       | FLUORINATED ETHYLENE PROPYLENE (FEP) | N/A                          |
| CENTER CONDUCTOR | TINNED COPPER CLAD STEEL             | N/A                          |
| COMPONENT        | MATERIAL                             | FINISH                       |

|  |                                  |   |                      |
|--|----------------------------------|---|----------------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM<br>TOLERANCE ON<br>FRAC DEC ANGLES<br>± 1/64 ± 0.13 ± 1°   | DRAWN BY <i>BB</i> DATE 08/10/92 | AMP Incorporated<br>140 Fourth Avenue<br>Waltham, MA 02451-7599     |                      |
|  | CHECKED BY                       | APPD BY <i>PR</i> DATE 08/14/92                                     | <b>AMP</b>           |
| These drawings and specifications are the property of AMP Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission. | USE ASSY PROCEDURE               | TITLE<br>OSMT RIGHT ANGLE JACK TO JACK CABLE ASSEMBLY (180° OFFSET) |                      |
|  | NO. A.P. <u>N/A</u>              | SIZE B  | CODE IDENT NO. 26805 |
|  |                                  | SCALE 10:1  | 9950-3100-23         |
|  |                                  | SHEET 1 OF 1  |                      |

CUSTOMER DRAWING

AMP PART # 1064353-1  
 SHEET 1 OF 1 REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)