
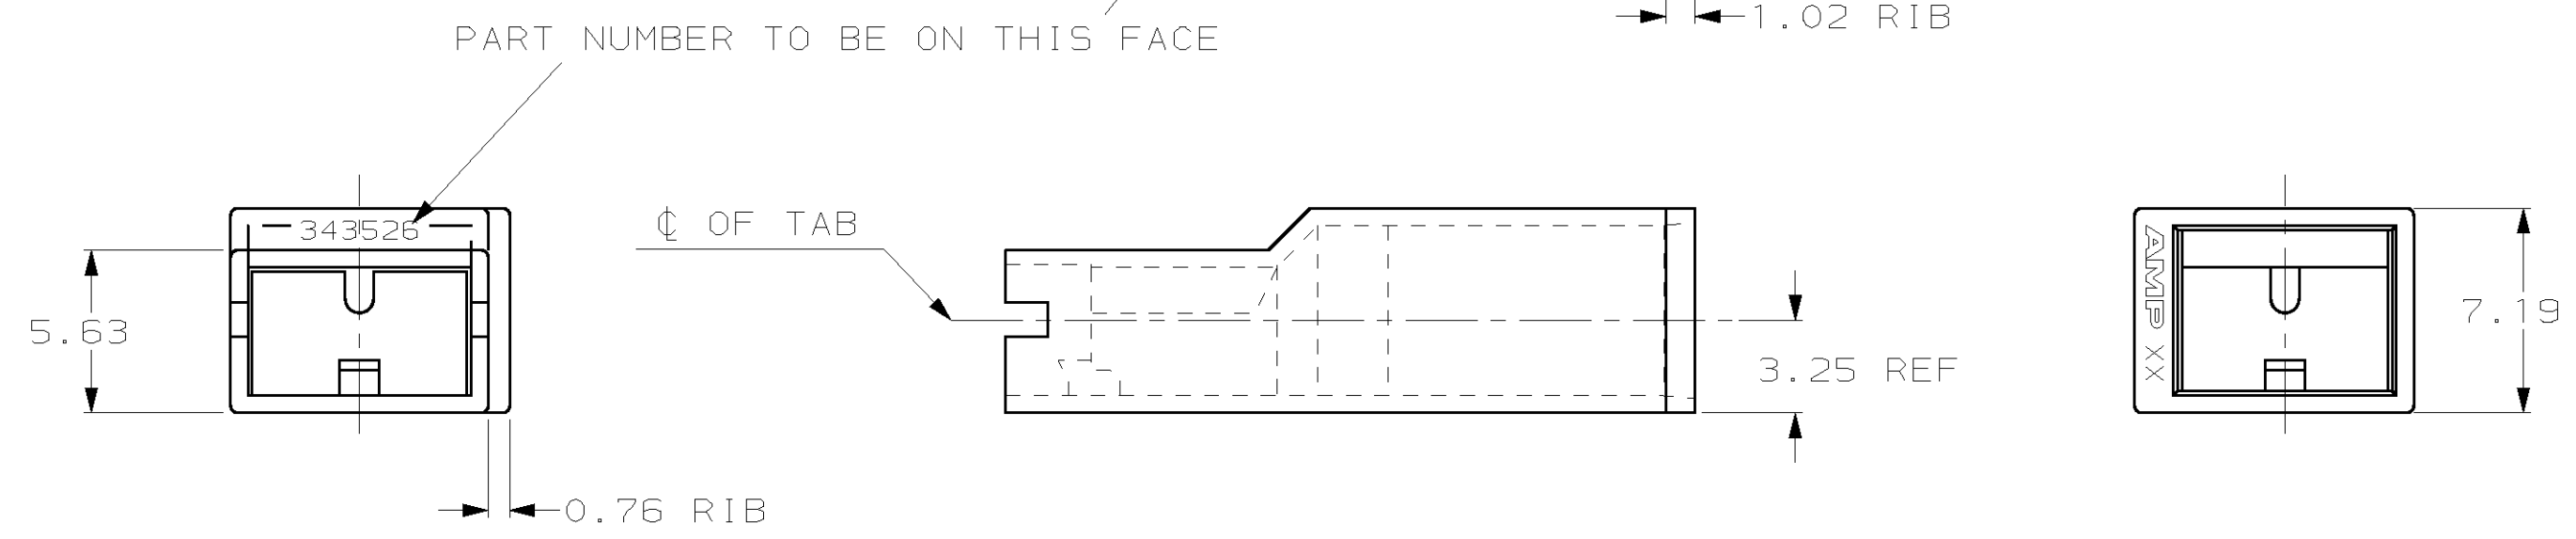
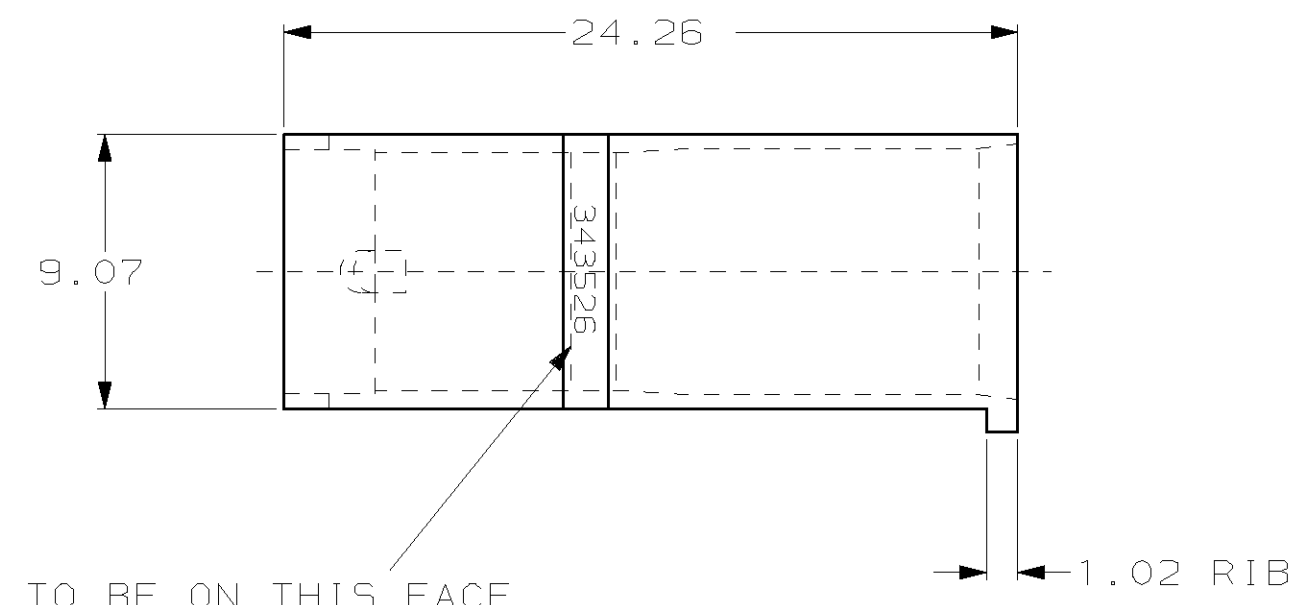


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
AF	50	B	REV PER 0L10-0424-97	10/30/97	JR	JG	

SUGGESTED MATING TAB

NOTE: MOLD TO AMP SPEC 115-40-1.

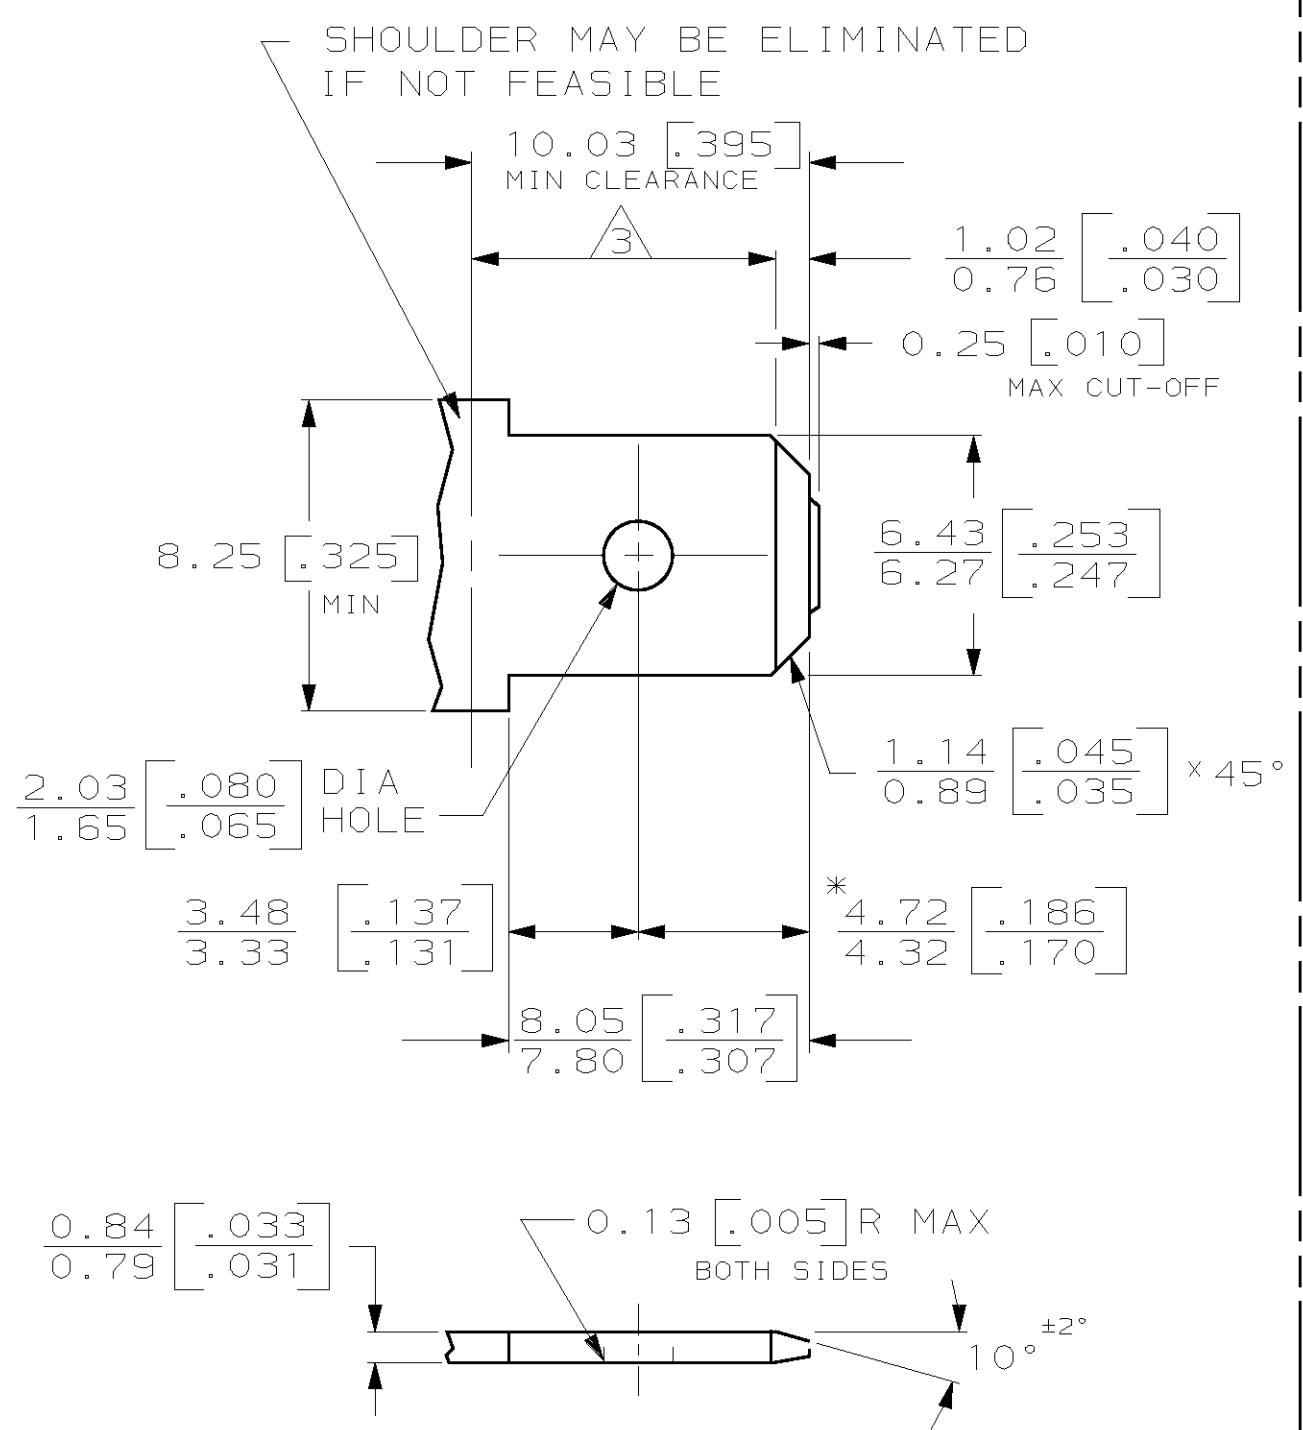

- 1 - MATL: 1/2H BRASS OR NICKEL PL STEEL.
- 2 - NO BURRS PERMISSIBLE AT HOLE.
- 3 - MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
- 4 - TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMP. IS OVER 225°F.
- 5 - HOLE MUST BE SYMMETRICAL ABOUT TAB Q WITHIN 0.076 [.003]
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

343526-1
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	10/30/97	AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS:		CHK	MS FEHER	10/30/97	
mm		APVD	J GILLESPIE	10/30/97	
		NAME		PRODUCT SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		HOUSING, RECEPTACLE, POSITIVE-LOCK, 6.35 [.250] SERIES, MK I	
0 PLC ±-		WEIGHT		SIZE	
1 PLC ±0.5		CUSTOMER DRAWING		CAGE CODE	
2 PLC ±0.5		SCALE		DRAWING NO	
3 PLC ±-		SHEET		RESTRICTED TO	
4 PLC ±-		OF		REV	
ANGLES ±-		1		B	
FINISH		4:1		A2 00779 C- 343526	
6/6 NYLON		BLACK		-	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)