
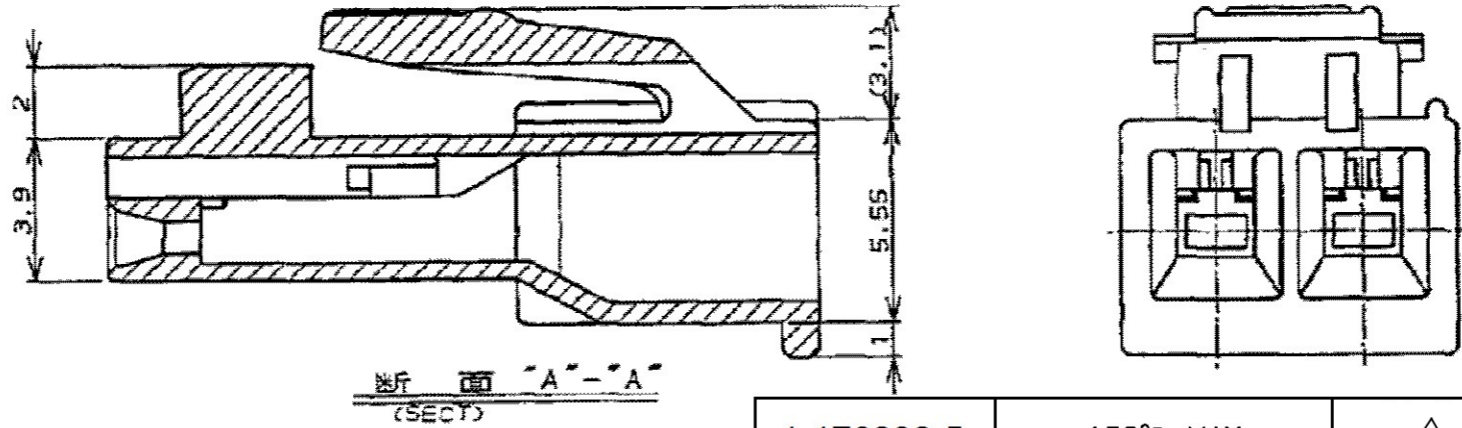
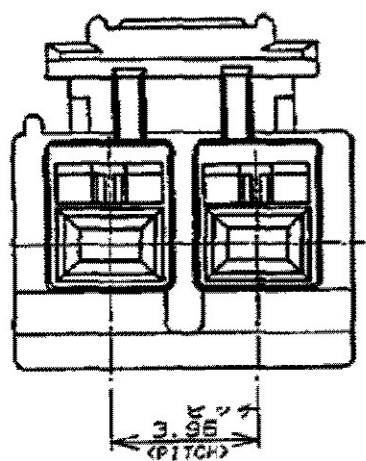


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—				
	C5	REVISED PER ECR-17-018148	13DEC17	SC	BH
	C6	REVISED PER ECR-19-017851	26NOV2019	SM	DZ

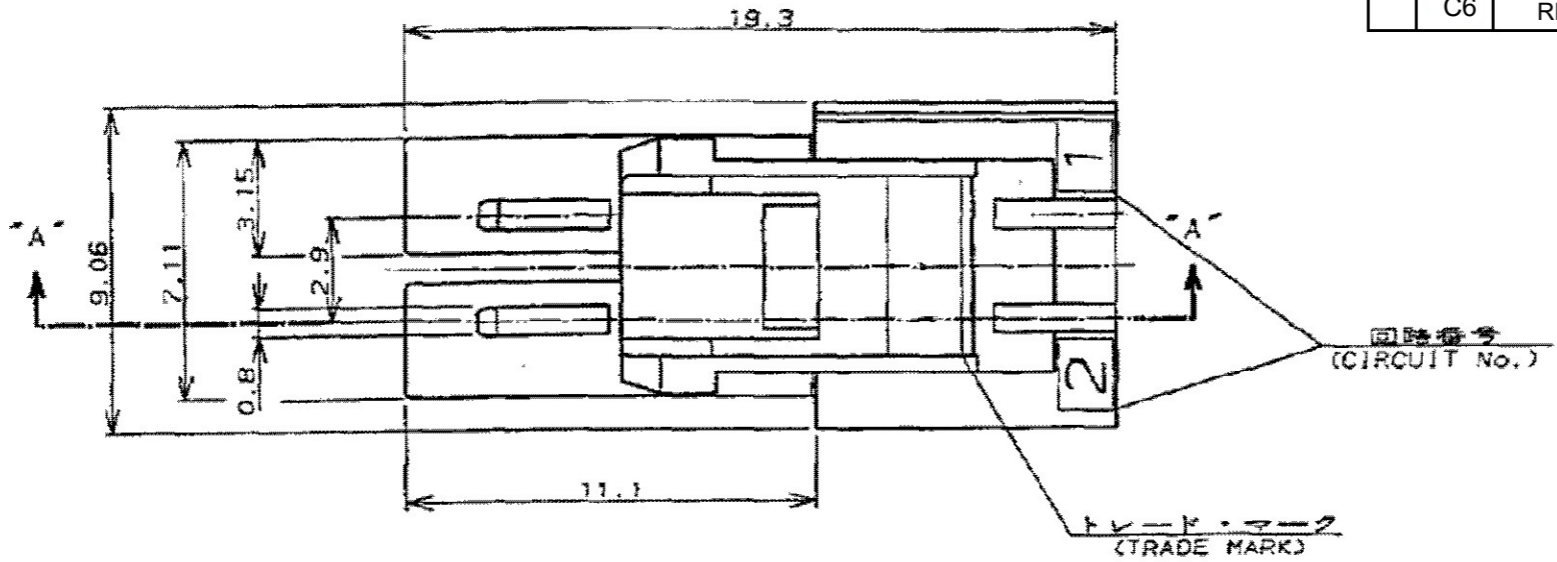

1. APPLICABLE CONTACT PART NUMBER;  
 REC CONTACT: 175152-□ (#20-#16AWG)  
 175151-□ (#26-#22AWG)
2. TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX
3. MATERIAL: PA66, UL94 V-0, GWIT 775°C

1-176282-5	130°C MAX	△3	GREEN 绿	2	1-176271-5
1-176282-1	130°C MAX	△3	NATURAL 自然色		1-176271-1 <sub>△2</sub>
176282-□ 176292-□	105°C MAX	PA66	BLACK 黒	2	176271-9
			BLUE 青		176271-6
			YELLOW 黄		176271-4
			RED 赤		176271-2
NATURAL 自然色				176271-1	
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色	Pos. 極数	PART NUMBER 型番
	MATERIAL 材料				

1. 適用端子型番;  
 リセコンタクト: 175152-□ (#20-#16AWG)  
 175151-□ (#26-#22AWG)
2. 適用コンタクトの使用温度は最大105°C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN M.SHINDO 08NOV1989  
 CHK Y.FUJITA 08NOV1989  
 APVD Y.FUJITA 08NOV1989

PRODUCT SPEC 108-5302  
 APPLICATION SPEC 114-5142

WEIGHT

CUSTOMER DRAWING

**TE** TE Connectivity

AMP UNIVERSAL POWER CONN.  
 3.96mm PITCH PLUG HOUSING 2 Pos. (SGL ROW)  
 AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング

SIZE A3 CAGE CODE 00779 DRAWING NO. C-176271 RESTRICTED TO

SCALE NTS SHEET 1 OF 1 REV C6

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)