



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|---------------------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| CM | 00 | V | REVISED PER ECR-20-000721 | 04MAR2020 | PC SW |

| YES | DIM A | NO. OF CIRCUITS | PART NO. |
|-----|--------------|-----------------|------------|
| YES | 71.12[2.800] | 28 | 5-641238-8 |
| YES | 68.58[2.700] | 27 | 5-641238-7 |
| YES | 66.04[2.600] | 26 | 5-641238-6 |
| YES | 63.50[2.500] | 25 | 5-641238-5 |
| YES | 60.96[2.400] | 24 | 5-641238-4 |
| YES | 58.42[2.300] | 23 | 5-641238-3 |
| YES | 55.88[2.200] | 22 | 5-641238-2 |
| YES | 53.34[2.100] | 21 | 5-641238-1 |
| YES | 50.80[2.000] | 20 | 5-641238-0 |
| YES | 48.26[1.900] | 19 | 4-641238-9 |
| YES | 45.72[1.800] | 18 | 4-641238-8 |
| YES | 43.18[1.700] | 17 | 4-641238-7 |
| YES | 40.64[1.600] | 16 | 4-641238-6 |
| YES | 38.10[1.500] | 15 | 4-641238-5 |
| YES | 35.56[1.400] | 14 | 4-641238-4 |
| YES | 33.02[1.300] | 13 | 4-641238-3 |
| YES | 30.48[1.200] | 12 | 4-641238-2 |
| YES | 27.94[1.100] | 11 | 4-641238-1 |
| YES | 25.40[1.000] | 10 | 4-641238-0 |
| YES | 22.86[.900] | 9 | 3-641238-9 |
| YES | 20.32[.800] | 8 | 3-641238-8 |
| YES | 17.78[.700] | 7 | 3-641238-7 |
| YES | 15.24[.600] | 6 | 3-641238-6 |
| YES | 12.70[.500] | 5 | 3-641238-5 |
| YES | 10.16[.400] | 4 | 3-641238-4 |
| YES | 7.62[.300] | 3 | 3-641238-3 |
| YES | 5.08[.200] | 2 | 3-641238-2 |

| NO | DIM A | NO. OF CIRCUITS | PART NO. | REASON |
|----|--------------|-----------------|------------|--------------------------|
| NO | 71.12[2.800] | 28 | 2-641238-8 | SUPERSEDED BY 5-641238-8 |
| NO | 68.58[2.700] | 27 | 2-641238-7 | SUPERSEDED BY 5-641238-7 |
| NO | 66.04[2.600] | 26 | 2-641238-6 | SUPERSEDED BY 5-641238-6 |
| NO | 63.50[2.500] | 25 | 2-641238-5 | SUPERSEDED BY 5-641238-5 |
| NO | 60.96[2.400] | 24 | 2-641238-4 | SUPERSEDED BY 5-641238-4 |
| NO | 58.42[2.300] | 23 | 2-641238-3 | SUPERSEDED BY 5-641238-3 |
| NO | 55.88[2.200] | 22 | 2-641238-2 | SUPERSEDED BY 5-641238-2 |
| NO | 53.34[2.100] | 21 | 2-641238-1 | SUPERSEDED BY 5-641238-1 |
| NO | 50.80[2.000] | 20 | 2-641238-0 | SUPERSEDED BY 5-641238-0 |
| NO | 48.26[1.900] | 19 | 1-641238-9 | SUPERSEDED BY 4-641238-9 |
| NO | 45.72[1.800] | 18 | 1-641238-8 | SUPERSEDED BY 4-641238-8 |
| NO | 43.18[1.700] | 17 | 1-641238-7 | SUPERSEDED BY 4-641238-7 |
| NO | 40.64[1.600] | 16 | 1-641238-6 | SUPERSEDED BY 4-641238-6 |
| NO | 38.10[1.500] | 15 | 1-641238-5 | SUPERSEDED BY 4-641238-5 |
| NO | 35.56[1.400] | 14 | 1-641238-4 | 8 |
| NO | 33.02[1.300] | 13 | 1-641238-3 | SUPERSEDED BY 4-641238-3 |
| NO | 30.48[1.200] | 12 | 1-641238-2 | 8 |
| NO | 27.94[1.100] | 11 | 1-641238-1 | 8 |
| NO | 25.40[1.000] | 10 | 1-641238-0 | 8 |
| NO | 22.86[.900] | 9 | -641238-9 | 8 |
| NO | 20.32[.800] | 8 | -641238-8 | 8 |
| NO | 17.78[.700] | 7 | -641238-7 | 8 |
| NO | 15.24[.600] | 6 | -641238-6 | 8 |
| NO | 12.70[.500] | 5 | -641238-5 | 8 |
| NO | 10.16[.400] | 4 | -641238-4 | 8 |
| NO | 7.62[.300] | 3 | -641238-3 | 8 |
| NO | 5.08[.200] | 2 | -641238-2 | 8 |

LEADFREE DIM A NO. OF CIRCUITS PART NO.

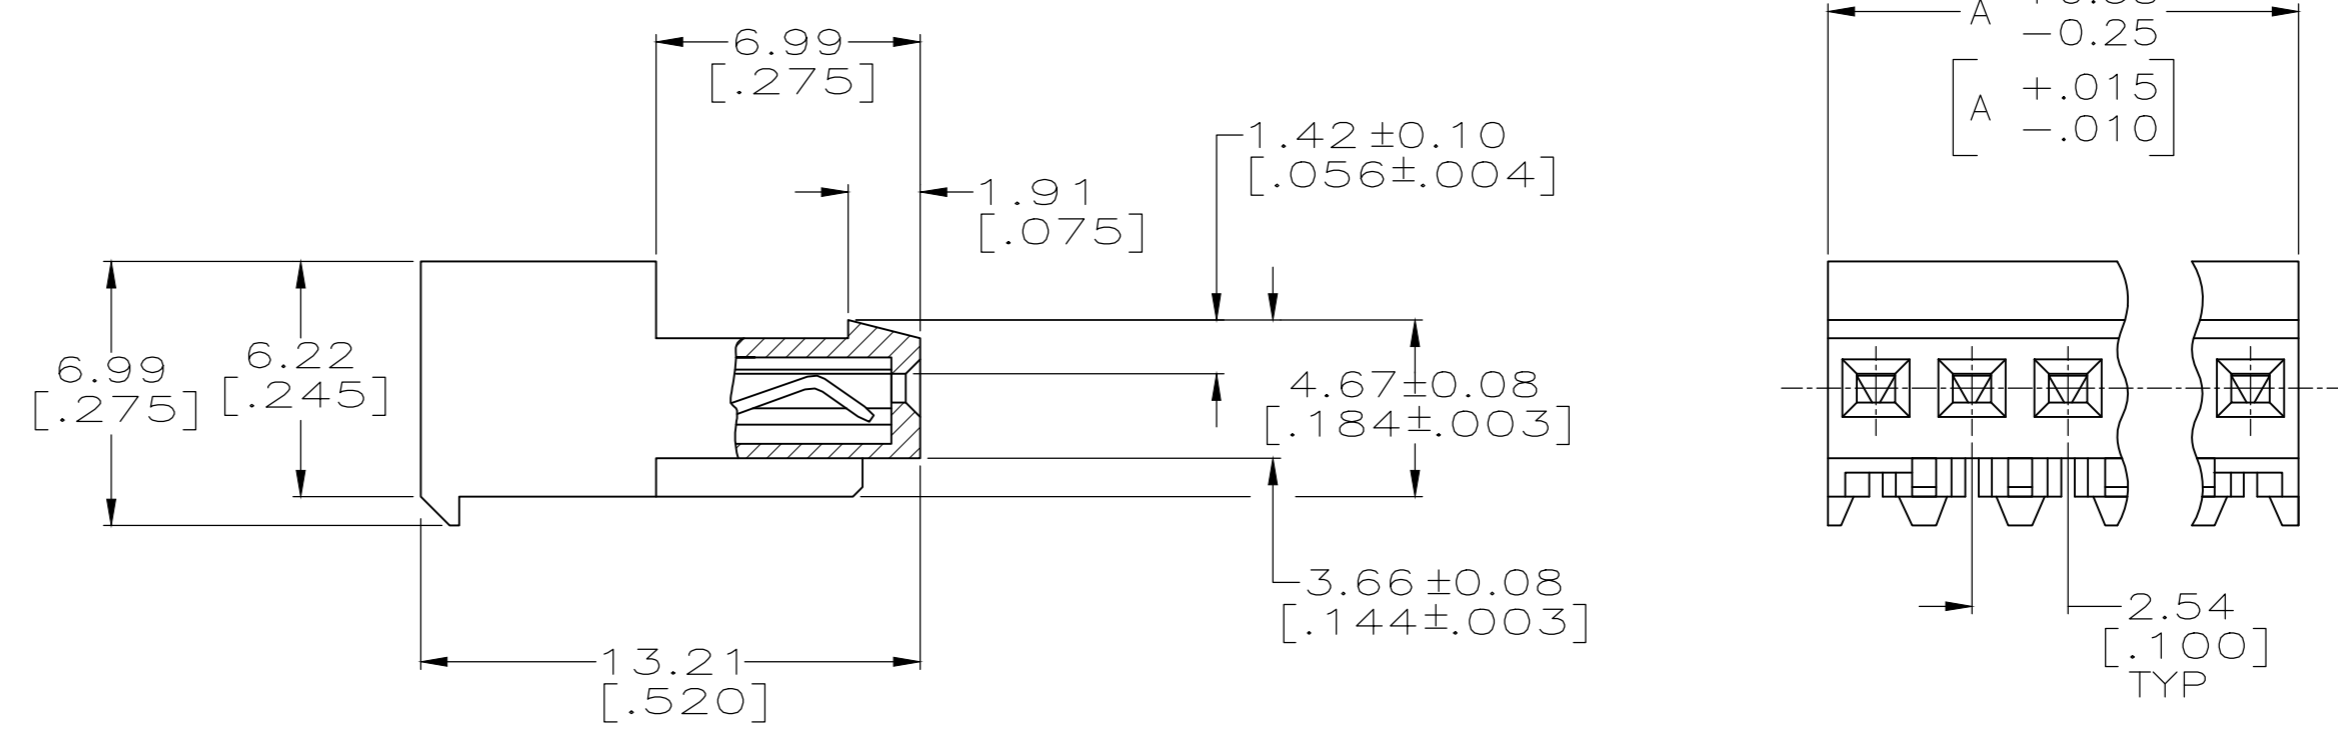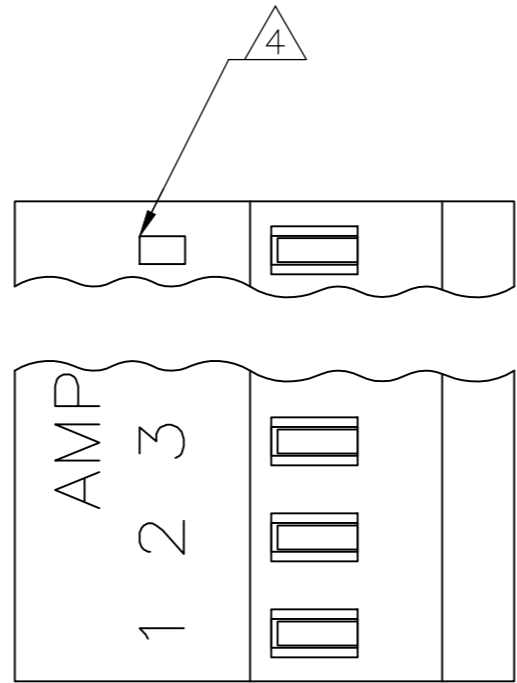

1 MATERIAL: CONNECTOR - NYLON UL94V-2 (WHITE).
 CONTACTS - 0.30[.012] THICK COPPER ALLOY
 0.00076 [.000030] GOLD) OR 0.00076[.000030]
 TOTAL GOLD FLASH OVER PALLADIUM NICKEL,
 PER TE CONNECTIVITY'S DISCRETION, IN CONTACT
 AREA WITH MATTE TIN FOR 641238-2
 THRU 2-641238-8, MATTE WHISKER MITIGATED TIN
 FOR 3-641238-2 THRU 5-641238-8 OVER
 NICKEL UNDERPLATE.

2. CONTACTS ACCEPT 24 AWG WIRE WITH 1.52[.060] MAX INSULATION DIAMETER.
 3. CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8 OBSOLETE PART NUMBER

| | | | | |
|---|--|----------------------------------|---|------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S. CARPENTER 07AUG2003 | | |
| DIMENSIONS: mm [INCHES] | | CHK D. BOSSI 07AUG2003 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.13 [.005] 4 PLC ± ANGLES ± | | APVD D. BOSSI 07AUG2003 | NAME MTA-100 CONNECTOR ASSEMBLY, 24 AWG, STANDARD | |
| MATERIAL 1 | | FINISH 1 | PRODUCT SPEC 108-1050 | SIZE A2 |
| | | | APPLICATION SPEC 114-1019 | CAGE CODE 00779 |
| | | | WEIGHT | DRAWING NO C=641238 |
| | | | CUSTOMER DRAWING | RESTRICTED TO - |
| | | | SCALE 5:1 | SHEET 1 of 1 |
| | | | | REV V |

A/C BUSINESS GROUP 3323 177-34 NICK GANNON

641238

A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)