

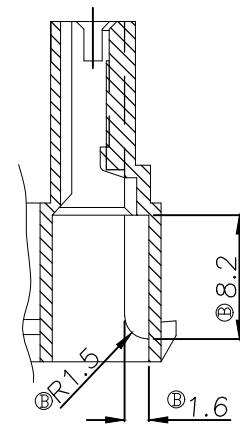
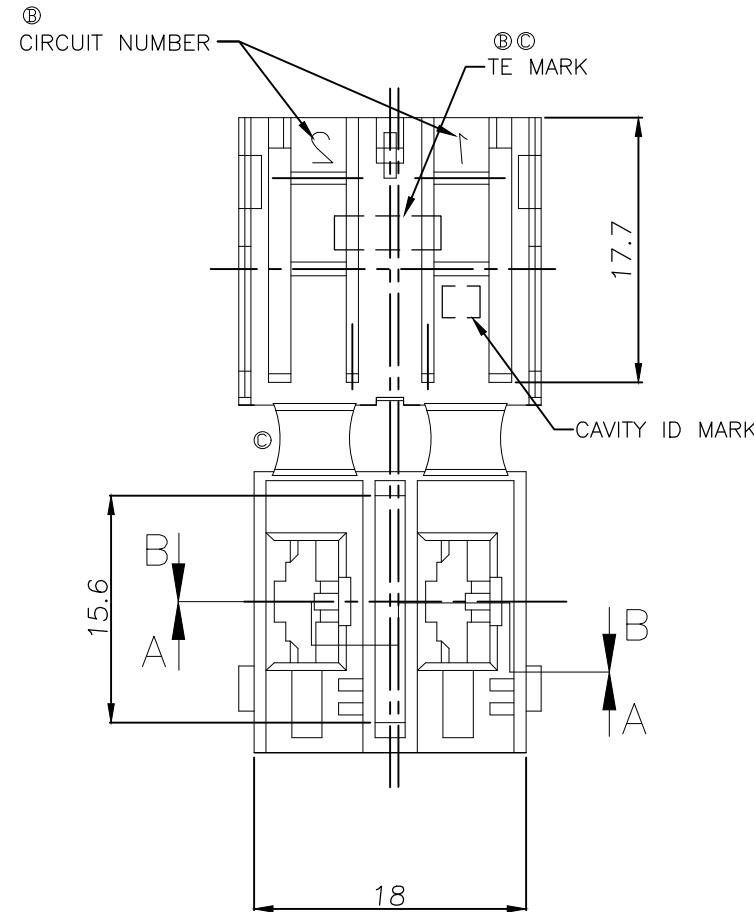


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED(ECR-20-004927)	MAY/12/20	LZ	EW

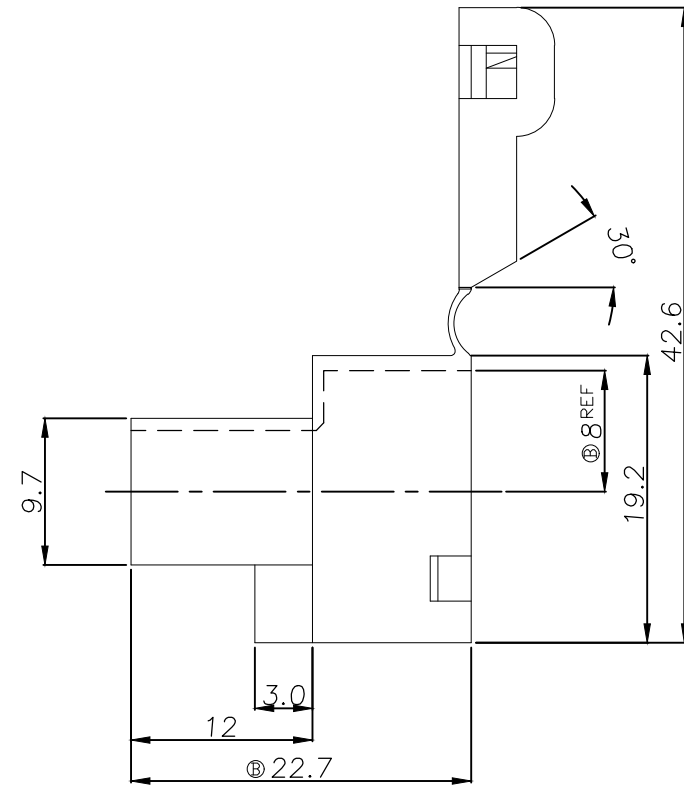

SECT. B-B

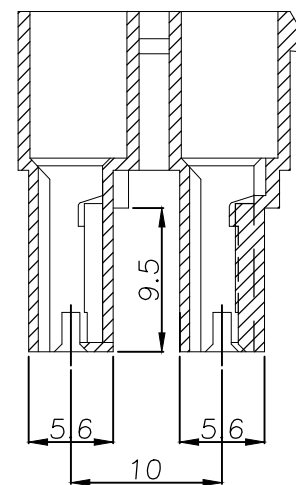

SECT. A-A

NOTE:

1. APPLICABLE CONTACT P/N  
936603-1, 936604-1, 936605-1
2. PRODUCT SPEC. ; 108-5162
3. INSTRUCTION SHEET ; IS-212J.

UL94V-2	Nylon 66	GREEN	85091-4
UL94V-2	Nylon 66	YELLOW	85091-3
UL94V-2	Nylon 66	BLUE	85091-2
UL94V-2	Nylon 66	NATURAL	85091-1
NOTES	MATERIAL	COLOR	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BH CHO	TE Connectivity  250 SER.FLAG POSITIVE LOCK HSG FOR LAYOUT					
DIMENSIONS: mm		CHK BW KANG				APVD CS LEE		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-5162				NAME		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC				RESTRICTED TO		
MATERIAL		WEIGHT		SIZE A3	CAGE CODE 00779	DRAWING NO C-85091	RESTRICTED TO	
-		-		CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)